

Product Guide 2021



MIYAWAKI®

Advanced Solutions for Steam and Condensate Management

About MIYAWAKI

Over 85 years Experience, Technology and Quality



The company **MIYAWAKI** has over 85 years history as one of the leading Japanese manufacturers of equipment for steam and condensate lines.

MIYAWAKI has a long experience as the leading supplier of steam traps for oil refineries and chemical plants in Japan. Besides of steam traps the company offers a wide range of pressure reducing valves for steam and other media, steam-water-mixing valves, separators, strainer, sight glasses and other ancillary equipment.

MIYAWAKI offers sophisticated hardware and software solutions for managing the steam trap population in a plant.

As the world leader of the production of bimetallic temperature control steam traps, the most effective steam traps for steam tracing and steam main lines in the sense of energy conservation, MIYAWAKI contributes substantially to the reduction of CO₂ emissions and to the development of a healthy environment.

Our mission



Kensuke Miyawaki,
President, member
of the executive board
of MIYAWAKI Inc.

"**MIYAWAKI's mission** is to promote the ideas of energy saving and environmental protection, to fulfil the deliveries of its products with a high rate of reliability and to provide a high level of technical support for our products.

Reducing the consumption of energy in the form of steam is an extremely important goal of each modern industrial enterprise. Steam Traps are able to play an important role in this process, because by improving the management of the steam and condensate system and by regular professional steam trap surveys, up to 40% of the steam losses can be reduced which are not caused by the manufacturing process.

We have every confidence that the high quality of MIYAWAKI products will enable our customers to save energy and to meet their production goals."

Our history

MIYAWAKI opened its doors in 1933 and began designing steam traps for industrial use. In 1949, after extensive experiments and tests, MIYAWAKI developed an entirely new type of steam trap, with a "Duplex"-type valve, a double-ported valve operating by the pressure differential to increase the condensate capacity.

In the following years, the design was further refined and sales soared to the point where by 1953 the company MIYAWAKI Steam Trap Manufacturing Co., Ltd. was able to incorporate. Along with the development and sales of products other than steam traps, the name changed to MIYAWAKI Inc. in April 1986.

To emphasize the growing international activities of MIYAWAKI Inc., in June 1991 the subsidiary company MIYAWAKI GmbH was established in Germany. Later a joint venture in Russia had been opened. In April 2018, the subsidiary company MIYAWAKI WEST Co., Ltd was established in China. During the last decade the network of sales representatives around the world was enlarged considerably.



MIYAWAKI certificates	4
Pressure Equipment Directive 2014/68/EU	5
Steam Trap Selection Guide	6

Steam Traps

Temperature Control Trap	7 – 14
Balanced Pressure Thermostatic Trap	15 – 18
Thermodynamic Disc Trap	19 – 27
Thermostatic Radiator Trap	28
Inverted Bucket Trap	29 – 36
Ball Float Trap	37 – 50
Pumping Trap	51 – 55
Steam Trap with Two-bolt connection	56

**Air Traps**

Air Trap	57 – 64
----------	---------

**Air Vents**

Air Vent	65 – 68
----------	---------

**Pressure Reducing Valves**

Pressure Reducing Valve	69 – 78
-------------------------	---------

**Hot Water Supplying System**

Steam-Water-Mixing Valve	79 – 81
--------------------------	---------



Water Gun, Check Valve	82
------------------------	----

Ancillary Equipment

Strainer, Vacuum Breaker, Anti-Freezing Valve	83
---	----



Sight Glass	84
-------------	----

Separator	85
-----------	----

Testing Equipment

Steam Trap Survey Assistant	86 – 87
-----------------------------	---------



Steam Trap Management System	88 – 89
------------------------------	---------

MIYAWAKI-Technology

SCCV®-System	90 – 91
--------------	---------

**International Comparison and Conversion**

Material Standards and Temperature, Flange Standards	92 – 93
--	---------

English Edition 2021
No. PG-04_2106E

Pressure, Steam Pressure Table	94 – 95
--------------------------------	---------

In the interest of the development and improvement of our products, MIYAWAKI Inc. reserves the right to change the specification of the products.

© MIYAWAKI Inc.

Quality, Performance and Challenges to energy saving

Since 1933, MIYAWAKI has committed itself to a policy of **uncompromising quality, performance and challenges to energy conservation.**

Research and development has a high priority at MIYAWAKI. To meet industry's demands and to ensure quality, MIYAWAKI invests heavily in the best personnel, facilities, manufacturing techniques and quality control systems available today.

This policy of „**Technology First**“ has resulted in major advances in steam trap design and operation.

As a result of the certification MIYAWAKI can assure all our customers of its continuing policy of high quality standards and of the fact that all products are manufactured in accordance with international regulations and technical requirements.

ISO 9001



ISO 14001



European Directive 2014/68/EU



Certificate of Conformity Russia



Pressure Equipment Directive 2014/68/EU of the European Parliament and of the Council



In the course of the harmonization of the laws of the EU Member States concerning pressure equipment, the Pressure Equipment Directive 97/23/EC (PED) had been adopted in May 1997. The Directive came into effect on 30 May 2002. Considering the experience and changes during the implementation of the Directive 97/23/EC, the European Union published on June 27, 2014 the new Pressure Equipment Directive 2014/68/EU. The new Directive entered into force on July 19, 2016.

According to the PED all manufacturers of pressure equipment covered by the PED, are under the obligation to subject each item of equipment to one of the conformity assessment procedures described in the PED. The conformity assessment procedures to be applied to an item of pressure equipment with a view to

affixing the CE marking shall be determined by the category, in which the equipment is classified. In this connection it is necessary to take into consideration the statement of the PED, that pressure equipment which is subject to Article 4, Section 3 of the PED "...shall be designed and manufactured in accordance with the sound engineering practice of a Member State in order to ensure safe use. ... Such equipment ... shall not bear the CE marking referred to in Article 18" of the PED.

In cooperation with TÜV Rheinland Industrie Service GmbH MIYAWAKI Inc., Osaka, Japan examined all products with respect to the PED and certified its production process in accordance with Modul A2 of the PED (internal manufacturing checks with monitoring of the final assessment).

As a result of this certification process MIYAWAKI Inc. draws the following conclusions:

1. The following MIYAWAKI products are classified according to Article 4, Section 3 of the PED which does not allow to bear the CE marking:

Steam Traps:

TB1N, TBU4, TB7N, TB9N, TB51, TB52, TBH71, TBH72, TBH81, TBH82, W, DC1, DC2, DV1, DL1, DX1, DF1, S31N, SC31, SC, SF, SV, SL, SU2N, SU2H, SD1, S55N, S55H, S61N, S62N, ER105, ER110, ER116, ES5, ESU5, ES8N, ES10, ES12N, ESH8N, G11N, G12N, G3N-10R (to DN65), G3N-16R (to DN50), G2, GC1, GC20, G20N, G30

Steam Pressure Reducing Valves: RE1, RE2, RE3, REC1, RE10N

Steam-Water-Mixing Valve: MX1N

All above MIYAWAKI products are designed and manufactured in accordance with the sound engineering practice as requested by the PED.

2. Steam traps not included into point 1 belong to category I or category II according to Annex II & III of the PED. They will bear the CE marking and the conformity with the PED will be confirmed by issuing a declaration of conformity.



As a result of the certification by TÜV Rheinland Industrie Service GmbH MIYAWAKI can assure all our customers of its continuing policy of high quality standards and of the fact, that all products are manufactured in accordance with the regulations and technical requirements of the EU.

		First Choice	Second Choice
Steam Mains	< 1,6 MPa	TB9N	GC1, D, S, ES
	< 2,1 MPa	TB7N	GC1, S
	< 6,4 MPa	TB51, TB52	S61N, S62N, ESH
	< 20,0 MPa	TBH71, 72, 81, 82	
Process Equipment	Heater	G, ES, ER	S
	Heat Exchanger	G	ES, ER
	Vaporizer	G	ES, S
	Distiller	D	ES, S
	Sterilizer	D	ES, G, S
	Cylinder Dryer	ES, ER	
	Band Dryer	G	ES, ER, D
	Multi-Platen Presses	G	ES, D, S
	Vulcanizer	D	S, ES
	Tyre Presses	D	S, ES
	Autoclaves	D	G, ES
Laundry Equipment	Dryer	G	ES, D, S
	Tumbler	ES, ER	D, S
	Presses	D	S, ES
	Steam Mannequins	D	ES, S
	Steam Iron	SL3	SD1
	Steam Mangles	D, G	ES, S
Food Processing Equipment	Process Boiling Pans	G	ES, D
	Hot Tables	D, G	ES
	Jacketed Boiling Pans	D	G, ES, S
	Tilting Pans	ES	D
	Brewing Pans	G	ES, D
	Evaporator	G	ES, ER
	Retorts	G	ES, ER
Heating & Air Conditioning	Steam Radiator	W	D
	Unit Heaters	G	ES
	Convector	W	D, ES
	Radiant Panels	W	D, ES
	Air Heater	D	ES, G
	Air Humidifiers	ES, G	D, S
	Heating Coils	D, ES	G, S
	Air Conditioning Units	ES, G	D
	Calorifiers	G, ES	D
Tracing	Steam Tracer Lines	TB	D
	Tank Heating	TB	D, ES, S
	Copper Tracing (Instrument Tracing)	TB1N	DC1

Temperature Control Steam Traps

SERIES TB

Temperature Control Steam Traps are bimetallic steam traps which do not follow the steam saturation curve. The discharge temperature can be adjusted manually, what allows to adopt these steam traps to a wide range of applications, where optional undercooling is possible and where sensible heat savings and flash steam reduction are desirable. These steam traps are perfectly fitted for reducing the steam consumption at steam main and steam tracing lines thus guaranteeing a high degree of energy savings.

Models TB7N & TB9N

TBU4, TBU4B

TB1N

TB51/52

TBH71/72/81/82

with forged steel body for low and medium pressure applications

with stainless steel body for low pressure tracing

with steel body for low pressure applications

with forged steel body for high pressure applications

with cast steel body for high pressure applications

Features

- All traps are equipped with the patented valve mechanism SCCV®-System (see pages 90 – 91).
- The SCCV®-System ensures a superior closing performance in the center of the port, greatly reduced wear of the internal parts and extended lifetime of the trap.
- Highly efficient in energy conservation – eliminates virtually 100% of steam loss.
- Continuous discharge of the condensate according to the adjusted temperature – not influenced by inlet pressure changes.
- Inline repairable – easy and quick replacement of the bimetal unit and the seat.
- Readjustment possible while the trap is in operation (for low pressure applications).
- All traps equipped with integral strainer.
- Can be installed both horizontally and vertically.

Suitable for:

TB7N

Steam main lines and tracing lines

TB9N

Steam main lines, tracing and small heat exchanger applications with specific condensate undercooling

TBU4, TB1N

Steam tracing lines

TB51/52


High pressure steam main lines

TBH71/72/81/82

High pressure steam main lines

Operating principle

 cold condensate  hot condensate

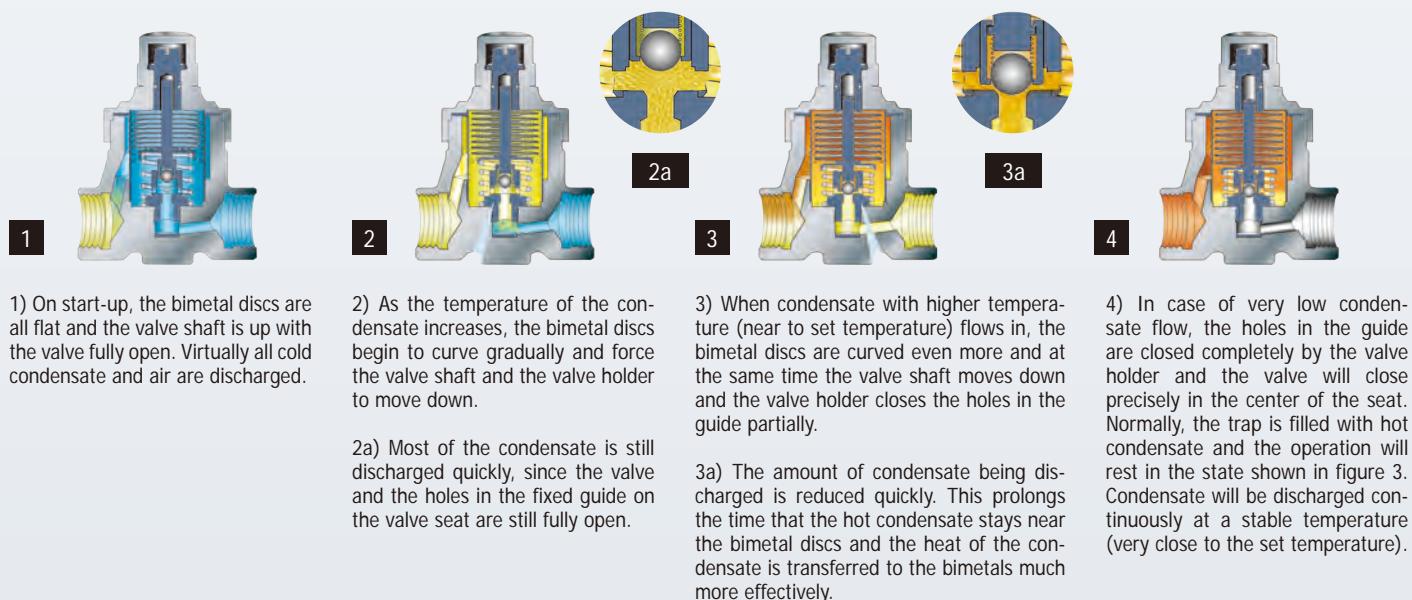

SERIES TB Bimetal Temperature Control Trap

TB7N**Available options TB7N**

- with ball valve (TB7BN-C)
- with blow valve (TB7BN-R)
- with scale removal (TB7N-SR)

Special version TB7N-P

with maximum operating pressure
2,7 MPa / 392 psig

Special face-to-face dimensions available.





- * **Curve 1** shows the trap's maximum capacity when discharging cold condensate.
- ** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.

Standard factory setting*:

100°C at 1,0 MPa (212°F at 145 psig)

* Settings may differ in various regions.
For more information please contact us.


Max. allowable pressure (PMA) = 4,0 MPa (580 psig)
Max. allowable temperature (TMA) = 400°C (752°F)

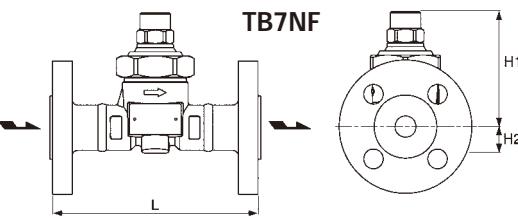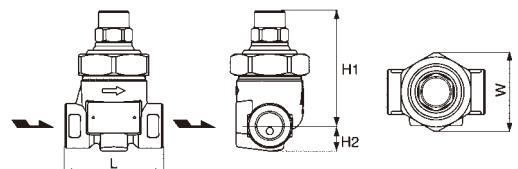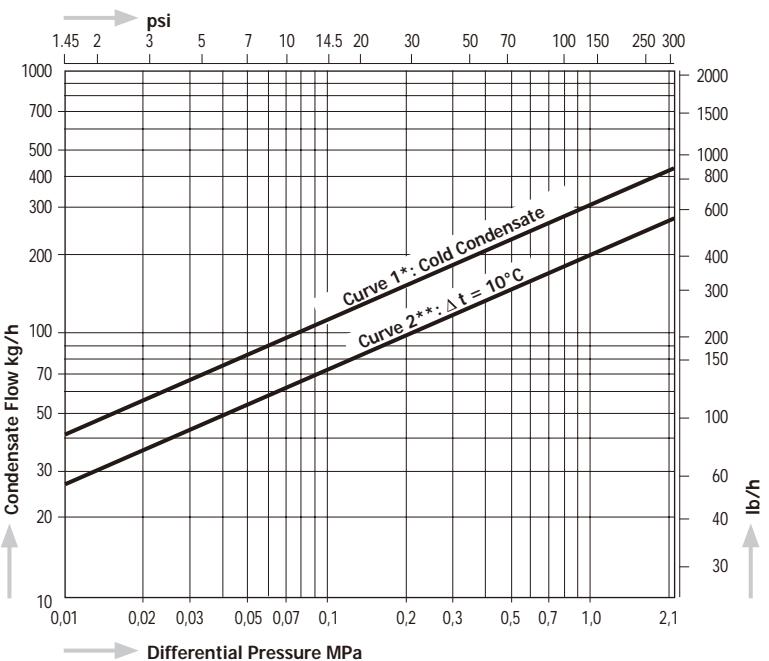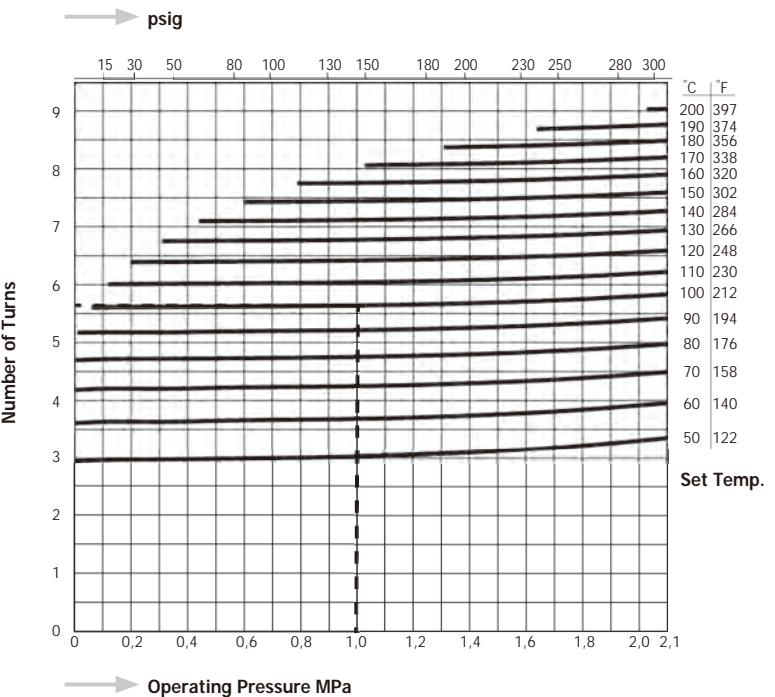Dimensions**TB7N / TB7NW****Capacity Chart TB7N****Temperature Stroke Chart TB7N**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Adjustable Range		Dimensions (mm)				Dimensions (in)				Body Material	Weight		
			MPa	psig	°C	°F	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb	
TB7N	Screwed Rc, NPT	½"	2,1	305	350	662	50 – 200	122 – 392	70	82	18	56	2.75	3.2	0.7	2.2	Forged Steel A105	0,9	2.0	
		¾"							80		19		0.75		0.9			1,0	2.2	
		1"							23		3.1		0.7		0.9			1,1	2.4	
TB7NW	Socket Weld JIS, ASME, DIN	½"	2,1	305	350	662	50 – 200	122 – 392	70	82	18	56	2.75	3.2	0.7	2.2		0,9	2.0	
		¾"							80		19		0.75		0.9			1,0	2.2	
		1"							23		3.1		0.7		0.9			1,1	2.4	
TB7NF	Flanged JIS, ASME	½"	2,1	305	350	662	50 – 200	122 – 392	145	82	18	56	5.7	3.2	0.7	2.2		2,0-2,6 *1	4.4-5.7 *1	
		¾"							23		19		0.75		0.9			2,5-3,4 *1	5.5-7.5 *1	
		1"							23		3.1		0.7		0.9			3,2-4,2 *1	7.0-9.3 *1	
	Flanged DIN PN40	DN15							150	82	18	56	5.9	3.2	0.7	2.2		2,6	5.7	
		DN20							160		16		6.3		0.9			3,4	7.5	
		DN25							160		16		6.3		0.9			4,0	8.8	

*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

TB9N

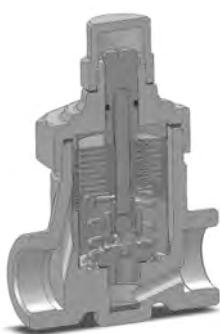

Available options TB9N

- with a ball valve (TB9BN-C)
- with a blow valve (TB9BN-R)
- with scale removal (TB9N-SR)

Special face-to-face dimensions available.

* **Curve 1** shows the trap's maximum capacity when discharging cold condensate.

** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.

The dashed line shows the standard factory setting:


100°C at 0,5 MPa (212°F at 73 psig)

Max. allowable pressure (PMA):
4,0 MPa (580 psig)


Max. allowable temperature (TMA):
400°C (752°F)

Dimensions


TB9N / TB9NW

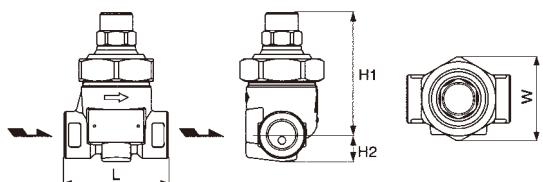


TB9NF

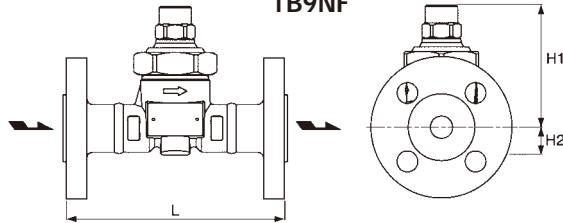

Capacity Chart TB9N

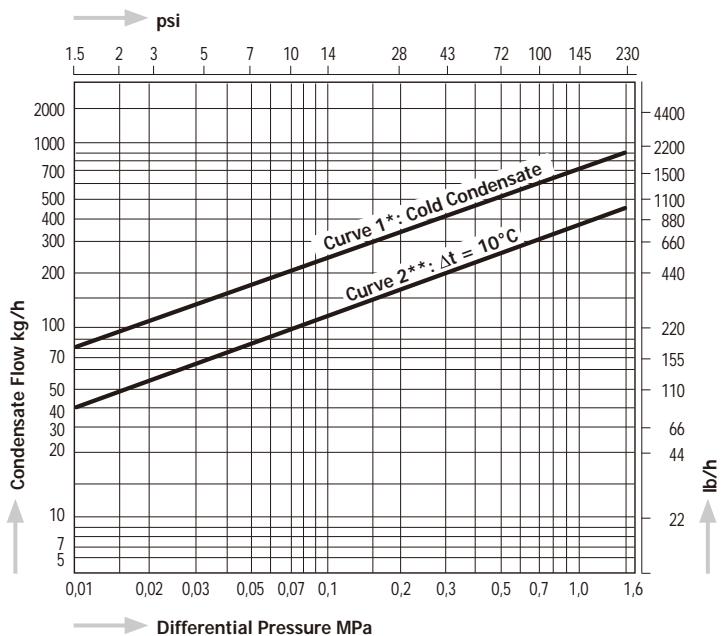


Temperature Stroke Chart TB9N

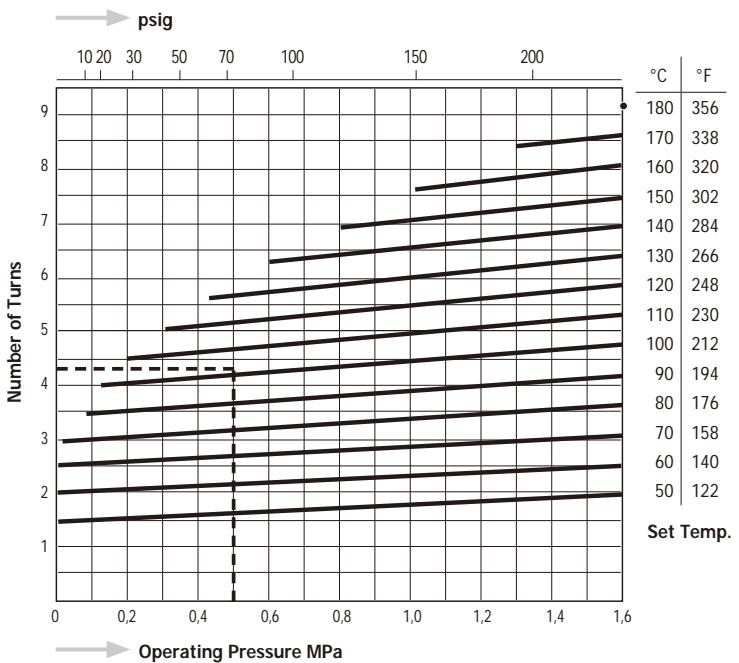

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Adjustable Range		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
TB9N	Screwed Rc, NPT	1/2"	1,6	230	350	662	50 – 180	122 – 356	70	18	56	2.75	3.2	0.7	2.2			0,9	2.0
		3/4"							80	19		3.1		0.75				1,0	2.2
		1"							23	3.1		0.9						1,1	2.4
TB9NW	Socket Weld JIS, ASME, DIN	1/2"	1,6	230	350	662	50 – 180	122 – 356	70	18	56	2.75	3.2	0.7	2.2			0,9	2.0
		3/4"							80	19		3.1		0.75				1,0	2.2
		1"							23	3.1		0.9						1,1	2.4
TB9NF	Flanged JIS, ASME	1/2"	1,6	230	350	662	50 – 180	122 – 356	145	18	56	5.7	3.2	0.7	2.2			2,0-2,5 *1	4,4-5,5 *1
		3/4"							23	19		5.9		0.75				2,5-3,4 *1	5,5-7,5 *1
		1"							160	23		6.3		0.9				3,2-4,2 *1	7,0-9,3 *1
	Flanged DIN PN40	DN15							150	82	56	5.9	3.2	0.7	2.2			2,6	5,7
		DN20							160	82	56	6.3		0.7				3,4	7,5
		DN25																4,0	8,8

*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

TBU4, TBU4B

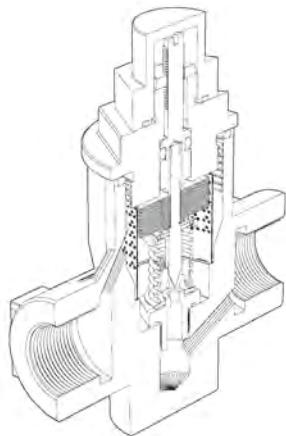

Screwed




with Scale Removal



with Ball Valve

TB1N



Available options TBU4

with a ball valve (TBU4-B-C)
with scale removal (TBU4-SR)

Special version TBU4-10

Operating pressure range:

0,5 – 1 MPa (73 – 145 psig)

* **Curve 1** shows the trap's maximum capacity when discharging cold condensate.

** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) (TBU4) / 5°C (9°F) (TB1N) below the adjusted temperature of the trap.


Standard factory setting:

70°C at 0,5 MPa; 158°F at 73 psig


The dashed line

shows the standard factory setting.


Dimensions



TBU4-6




TBU4B-6




TB1N

Temperature Stroke Chart TBU4/TBU4B-6

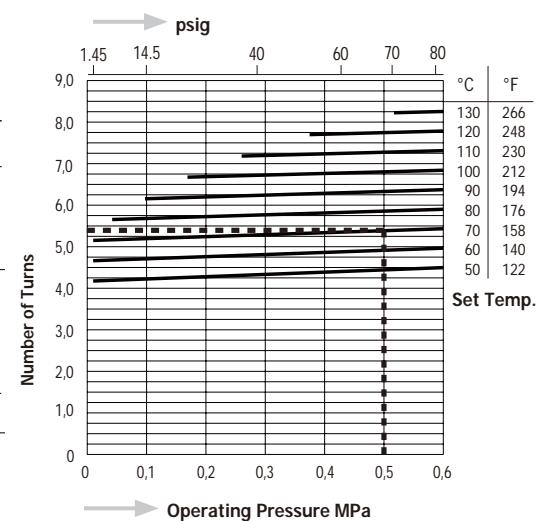


Temperature Stroke Chart TB1N

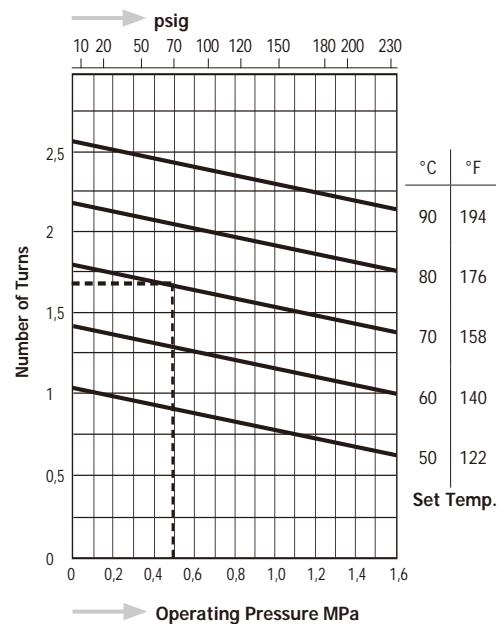

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Adjustable Range		Dimensions (mm)				Dimensions (in)				Body Material	Weight			
			MPa	psig	°C	°F	°C	°F	L	L1	H1	H2	W	L	L1	H1	H2	kg	lb		
TBU4-6	Screwed Rc, NPT	1/4", 3/8"	0,6	87	220	428	50 – 130	122 – 266	65	–	65	25	46	2,6	–	2,6	1,0	1,8	Stainless Steel SUS F304	0,58	1,28
TBU4B-6									32,5	65	22,5			1,3	2,6		0,9				
TB1N	Screwed Rc, NPT	1/4", 3/8"	1,6	230	350	662	50 – 90	122 – 194	70	–	–	38	2,8	–	–	–	1,5	Carbon Steel S25C	0,35	0,77	


TB51, TB52

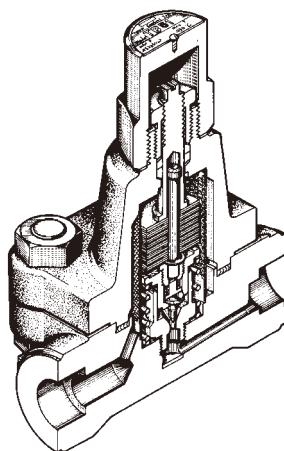


Screwed & Socket Weld

Flanged


Capacity Chart TB51/52-45

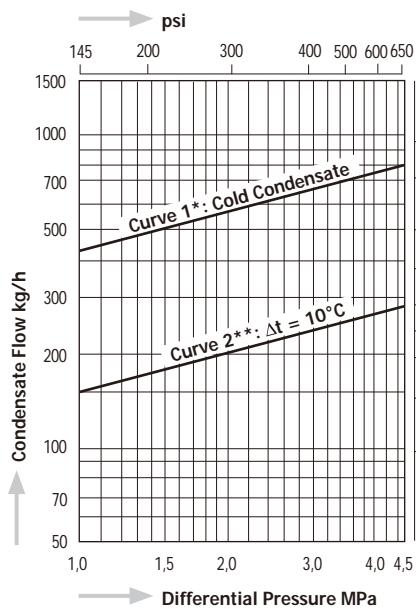


Capacity Chart TB51/52-65

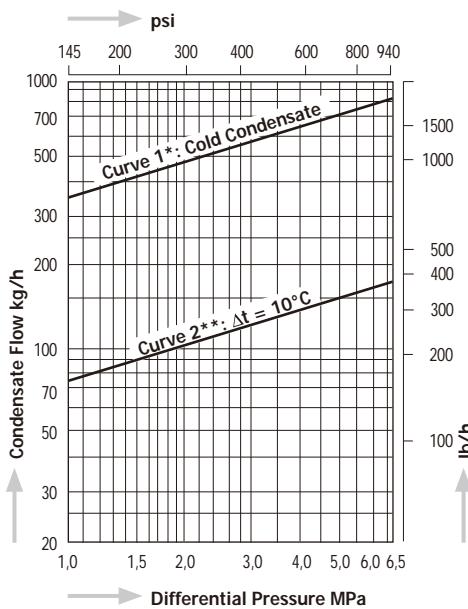

Temperature Stroke Chart TB51/52-45

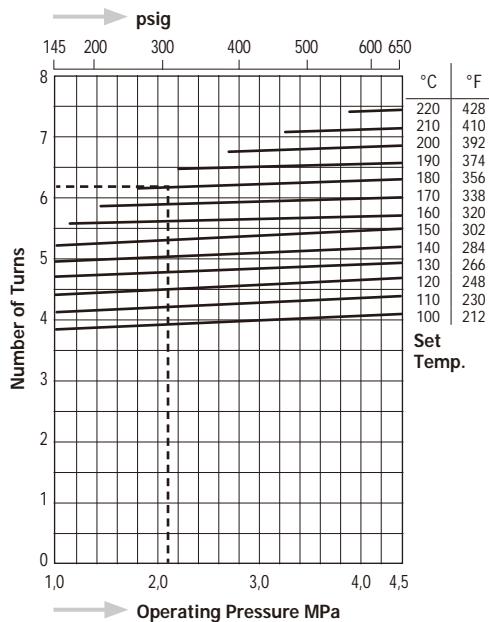

Temperature Stroke Chart TB51/52-65

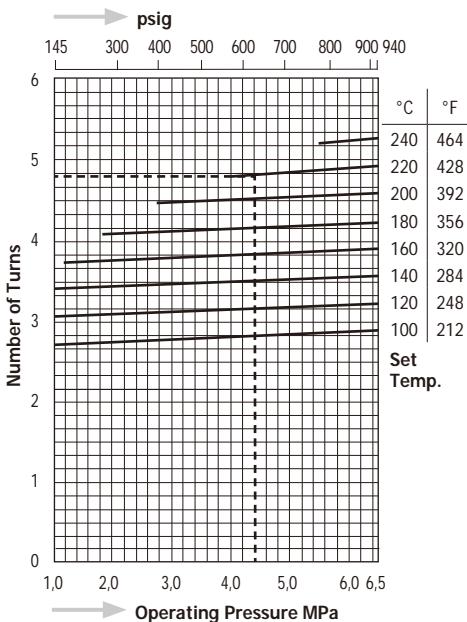

Special face-to-face dimensions available.

- * **Curve 1** shows the trap's maximum capacity when discharging cold condensate.
- ** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.


Standard factory setting:

TB51-45, TB52-45:
180°C at 2,1 MPa; 356°F at 305 psig
TB51-65, TB52-65:
220°C at 4,4 MPa; 428°F at 638 psig

The dashed line

shows the standard factory setting.

Dimensions TB51, TB52

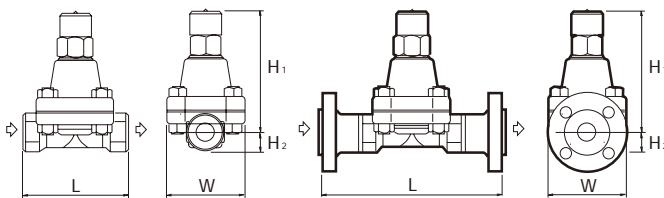


TB51F, TB52F

Table 1: Face-to-face dimensions / weights

Model	Size (in)	ASME 600 lb				DIN PN63 / PN100				JIS 63 K / ASME 900 lb			
		mm	in	kg	lb	mm	in	kg	lb	mm	in	kg	lb
TB51F TB52F	1/2"	200	7.9	7.3	16.1	210	8.3	9.4	20.7	220	8.7	9.6	21.2
	3/4"	210	8.3	8.5	18.7	230	9.1	11.4	25.1	230	9.1	11.1	24.5
TB51F TB52F	1"	240	9.4	9.6	21.2	230	9.1	12.5	27.6	240	9.4	12.1	26.7

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Adjustable Range		Dimensions (mm)				Dimensions (in)				Body Material	Weight		
			MPa	psig	°C	°F	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb	
TB51 (TB52)	Screwed Rc, NPT	1/2" – 1"	4,5	653	425 (475)	800 (887)	100 – 220	212 – 428	130	155	25	100	5.1	6.1	1.0	3.9	Forged Steel A105	5,7	12.6	
			6,5	943			100 – 240	212 – 464												
TB51 (TB52)W	Socket Weld JIS, ASME, DIN	1/2" – 1"	4,5	653	425 (475)	800 (887)	100 – 220	212 – 428	130	155	25	100	5.1	6.1	1.0	3.9	TB52: A182 F22	5,7	12.6	
			6,5	943			100 – 240	212 – 464												
TB51 (TB52)F	Flanged JIS, ASME, DIN	1/2" – 1"	4,5	653	425 (475)	800 (887)	100 – 220	212 – 428	Table 1	155	25	100	Table 1	6.1	1.0	3.9	Table 1	Table 1	Table 1	Table 1
			6,5	943			100 – 240	212 – 464												

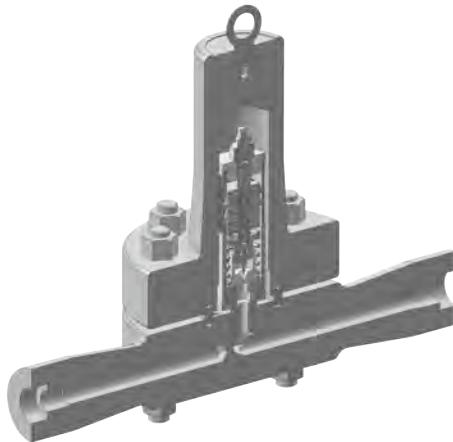SERIES TB Bimetal Temperature Control Trap – High Pressure**TBH71, TBH72
TBH81, TBH82****Standard factory settings**

Model	MPa	psig	Model	MPa	psig
TBH71-80	6,5 (210°C)	942 (410°F)	TBH72-80	6,5 (210°C)	942 (410°F)
TBH71-105	8,0 (230°C)	1160 (446°F)	TBH72-105	8,0 (230°C)	1160 (446°F)
TBH81-150	10,5 (250°C)	1522 (482°F)	TBH82-150	10,5 (250°C)	1522 (482°F)
TBH81-200	15,0 (270°C)	2175 (518°F)	TBH82-200	15,0 (270°C)	2175 (518°F)

Pressure shell design conditions

Model	PMA		TMA					
	MPa	psig	°C	°F				
TBH71-80	11,8 (425°C)	1711 (800°F)	593 (1,3MPa)	1100 (188 psig)				
TBH71-105								
TBH72-80	25,0 (492°C)	3625 (918°F)	593 (3,7MPa)	1100 (536 psig)				
TBH72-105								
TBH81-150	25,0 (492°C)	3625 (918°F)	593 (3,7MPa)	1100 (536 psig)				
TBH81-200								
TBH82-150	25,0 (520°C)	3625 (968°F)	593 (5,9MPa)	1100 (856 psig)				
TBH82-200	25,0 (538°C)	3625 (1000°F)	593 (7,3MPa)	1100 (1059 psig)				


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Adjustable Range		Dimensions (mm)				Dimensions (in)				Body Material	Weight		
			MPa	psig	°C	°F	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb	
TBH71-80W	Socket Weld JIS, ASME, DIN	½" - 1"	8,0	1160	470	878	100 - 260	212 - 500	250	195	33	140	9.8	7.7	1.3	5.5	Cast Steel A217WC6	13	28.6	
TBH71-105W			10,5	1522			100 - 280	212 - 536		400	268	50	180	15.7	10.6	2.0	7.1	13	28.6	
TBH81-150W			15,0	2175			100 - 300	212 - 572		400	268	50	180	15.7	10.6	2.0	7.1	29	63.8	
TBH81-200W			20,0	2900			100 - 320	212 - 608		400	268	50	180	15.7	10.6	2.0	7.1	29	63.8	
TBH71-80F	Flanged JIS, ASME, DIN	½" - 1"	8,0	1160	470	878	100 - 260	212 - 500	260	195	33	140	10.2	7.7	1.3	5.5	Cast Steel A217WC6	19*	41.8*	
TBH71-105F			10,5	1522			100 - 280	212 - 536		400	268	50	180	15.7	10.6	2.0	7.1	19*	41.8*	
TBH81-150F			15,0	2175			100 - 300	212 - 572		400	268	50	180	15.7	10.6	2.0	7.1	38*	83.6*	
TBH81-200F			20,0	2900			100 - 320	212 - 608		400	268	50	180	15.7	10.6	2.0	7.1	38*	83.6*	
TBH72-80W	Socket Weld JIS, ASME, DIN	½" - 1"	8,0	1160	550	1022	100 - 260	212 - 500	400	268	50	180	15.7	10.6	2.0	7.1	A217WC6	29	63.8	
TBH72-105W			10,5	1522			100 - 280	212 - 536		400	282	62	190	11.1	2.4	7.5		29	63.8	
TBH82-150W			15,0	2175			100 - 300	212 - 572		465	310	75	235	18.3	12.2	3.0	9.3	46*	101.2*	
TBH82-200W			20,0	2900			100 - 320	212 - 608		465	310	75	235	18.3	12.2	3.0	9.3	68	149.6	
TBH72-80F	Flanged JIS, ASME, DIN	½" - 1"	8,0	1160	550	1022	100 - 260	212 - 500	400	268	50	180	15.7	10.6	2.0	7.1	A217WC6	35*	77.0*	
TBH72-105F			10,5	1522			100 - 280	212 - 536		400	282	62	190	11.1	2.4	7.5		38*	83.6*	
TBH82-150F			15,0	2175			100 - 300	212 - 572		465	310	75	235	18.3	12.2	3.0	9.3	46*	101.2*	
TBH82-200F			20,0	2900			100 - 320	212 - 608		465	310	75	235	18.3	12.2	3.0	9.3	76*	167.2*	

* The weight refers to 1" flanged type. Depending on the size and flange standard the weights may differ.


Forged Steel (A182F91) as body material for TBH72 and TBH82 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

Bimetal Temperature Control Trap – High Pressure SERIES TB**Capacity Charts**


TBH71 - 80

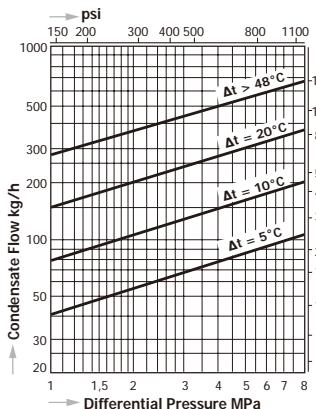


TBH72 - 80

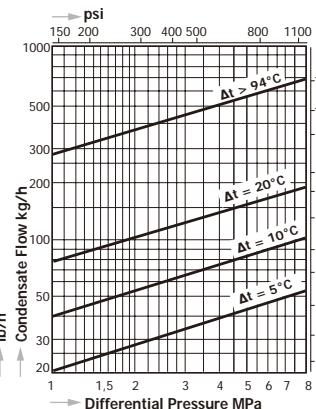**Temperature Stroke Charts**


TBH71 - 80

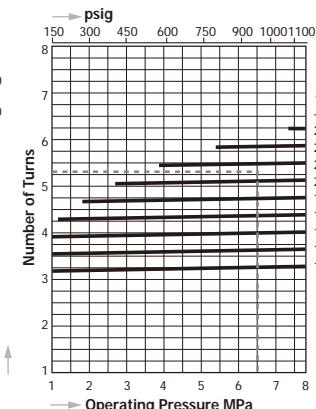


TBH72 - 80

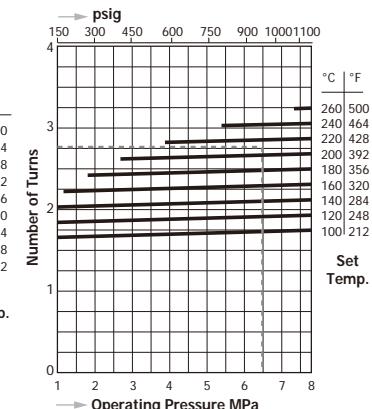


TBH71 - 105

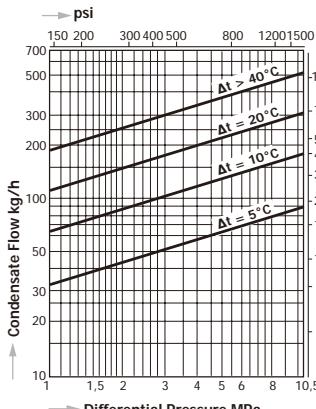


TBH72 - 105

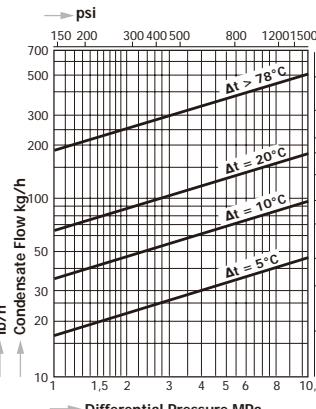


TBH71 - 105

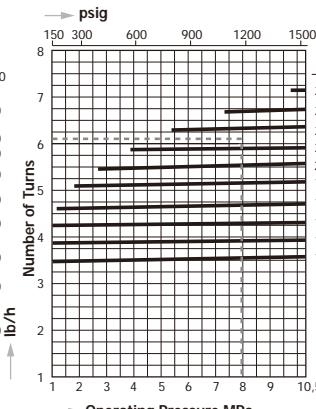


TBH72 - 105

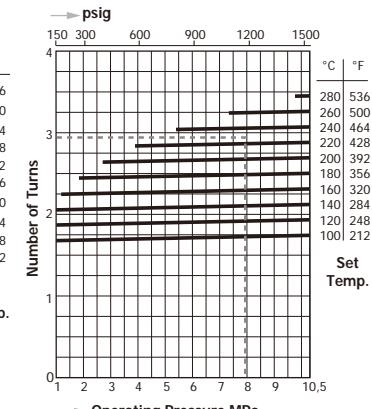


TBH81 - 150

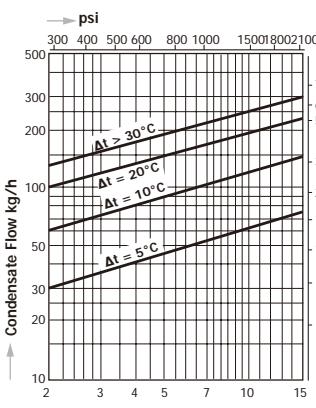


TBH82 - 150

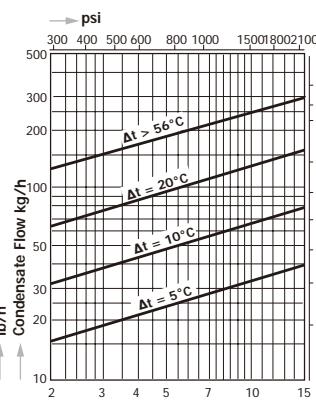


TBH81 - 150

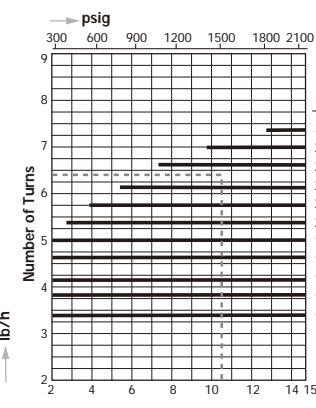


TBH82 - 150

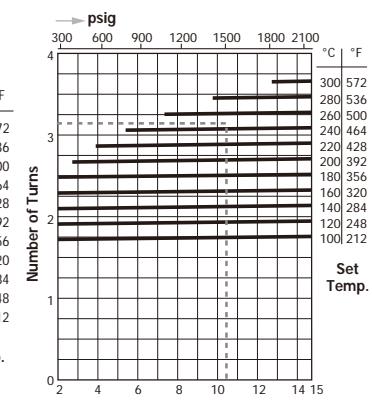


TBH81 - 200

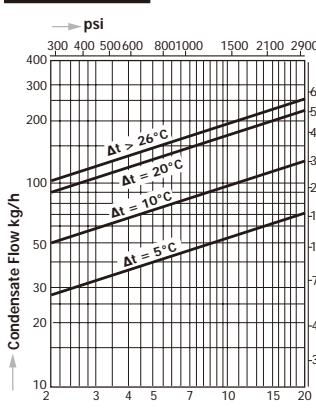


TBH82 - 200

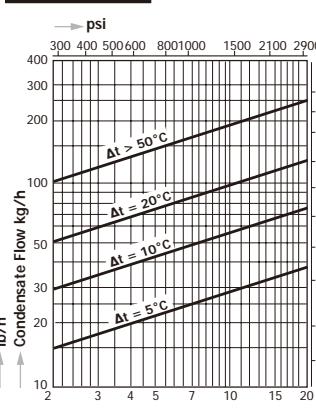







TBH81 - 200

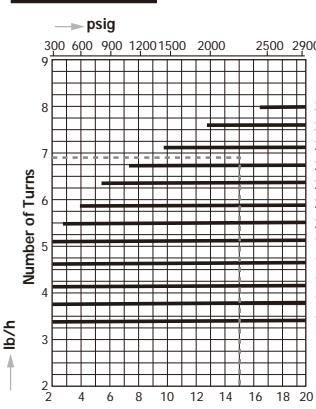

TBH82 - 200

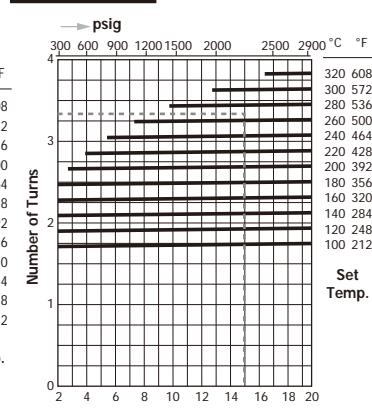

The dashed line shows the standard factory setting.

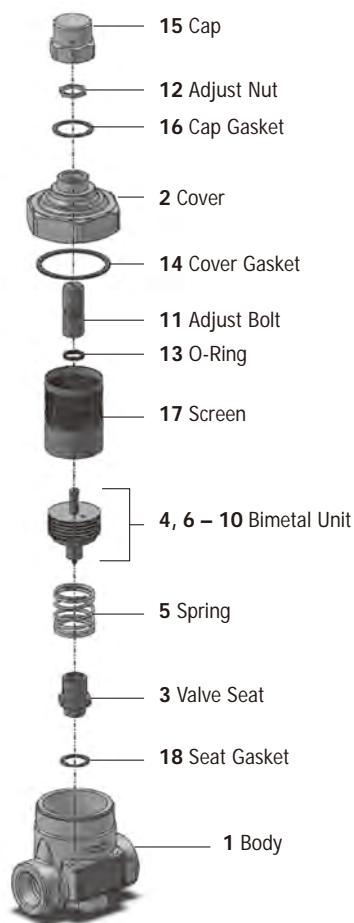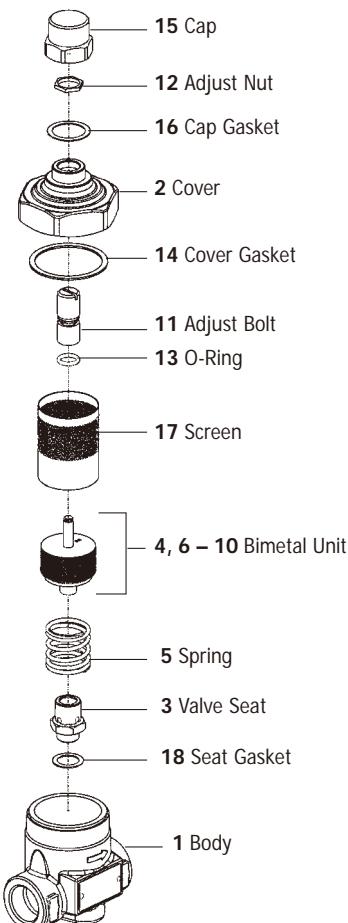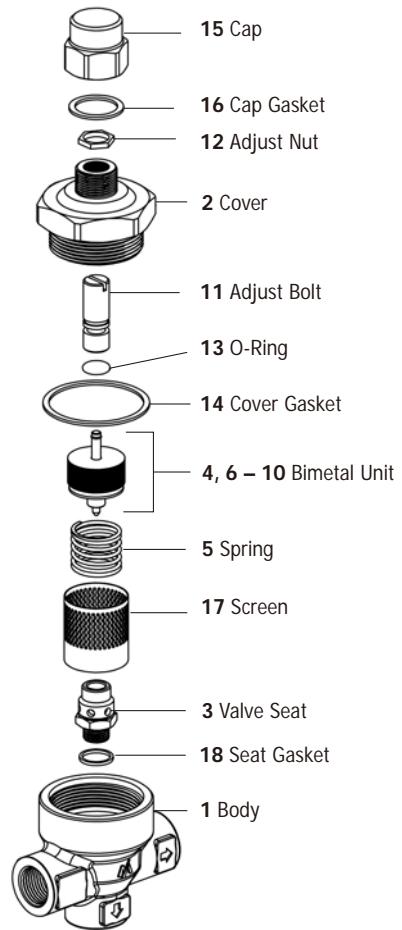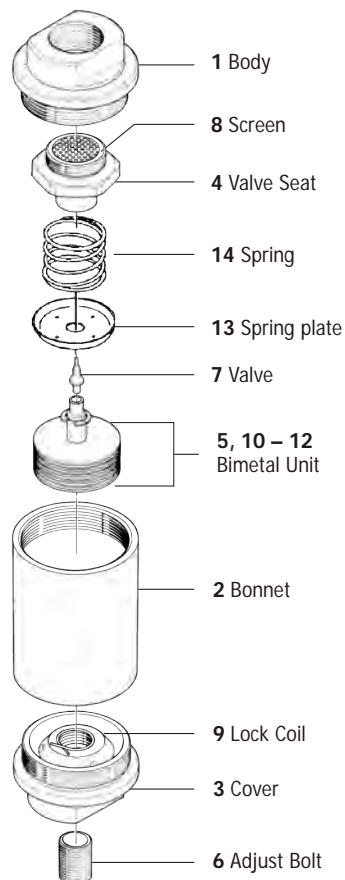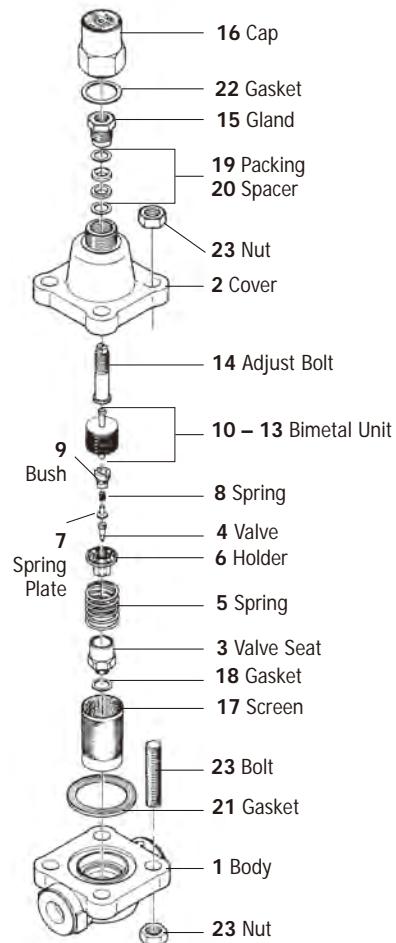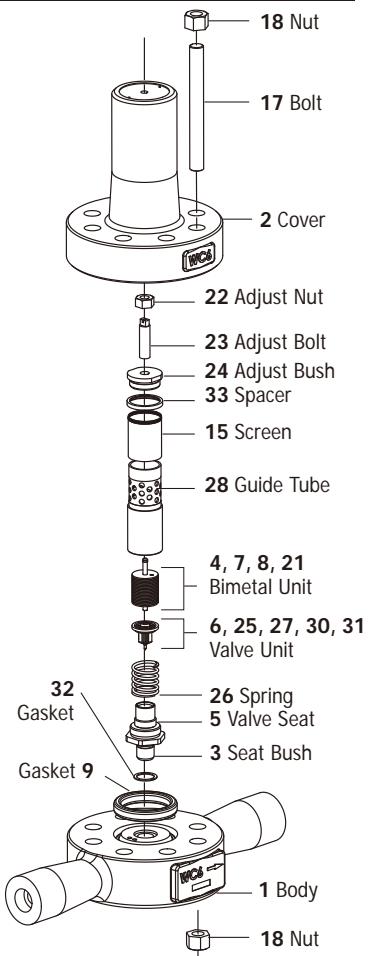SERIES TB Spare Parts**TB7N****TB9N****TBU4, TBU4B****TB1N****TB51, TB52****TBH71, TBH72, TBH81, TBH82**

Balanced Pressure Thermostatic Steam Traps

SERIES D

Balanced Pressure Thermostatic Steam Traps are equipped with a capsule element, which controls the discharge of condensate depending on the temperature. The capsule contains a special liquid, whose saturation temperature at a given pressure is always lower than that of the water. It ensures a very accurate functioning of the steam trap and is self-adjusting.

The discharge characteristic follows the saturation curve independent from pressure changes and the condensate load.

Series D MIYAWAKI steam traps can be delivered with 3 different capsule types:

Types H & C discharge hot condensate at approximately 5°C (9°F) below saturation temperature

Type L discharges hot condensate at approximately 15°C (27°F) below saturation temperature

Models	DC1, DC2, DV1, DL1, DX1 DF1	with stainless steel body and internals with forged steel body and stainless steel internals
---------------	--	---





- Features**
- Excellent air venting characteristics at start-up and during operation
 - The operation will not be influenced by back pressure
 - At time of non-operation self-draining
 - No steam loss throughout its operating range
 - All traps equipped with integral strainers
 - Can be installed both horizontally and vertically
 - Easy in-line inspection and maintenance
 - Lightweight, compact design

Suitable for

light to medium condensate loads: steam tracing, steam main drips, small heat exchangers, unit heaters, steam heating coils and many other applications in the petrochemical, chemical, textile, food, pharmaceutical and other industries.

Operating principle

■ cold condensate ■ hot condensate ■ steam

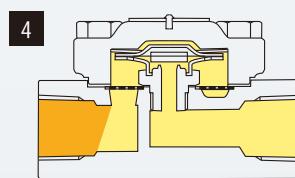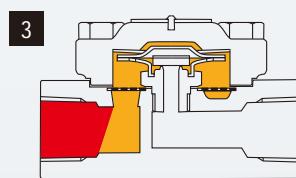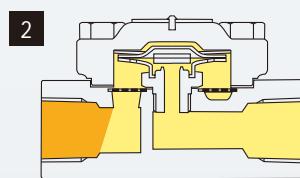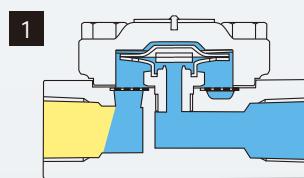

Upon start-up in the presence of cold condensate, the capsule element is contracted and the valve plate has moved away from the seat. The wide open valve plate discharges condensate and air rapidly.

As the temperature inside the trap increases, the capsule element will start to expand, moving the valve plate toward the seat.


Just before the condensate reaches saturation temperature, the valve plate will close the seat completely. Steam can not enter the trap, ensuring zero steam loss.







As the temperature inside the trap decreases, the capsule element moves away from the seat and the condensate will be discharged. During normal operation steps 3 and 4 will repeat continuously.

Operating principle of DV1 when using the bypass valve

When the handle is turned in the direction indicated by the BLOW arrow on the nameplate (counterclockwise), the bypass valve will open, a bypass circuit will be formed inside the trap, and a large volume of air and condensate can be discharged quickly. Scale that has accumulated in the screen can also be blown out.



When the bypass valve is closed, the type DV1 will operate as a normal steam trap (see above operating principle).

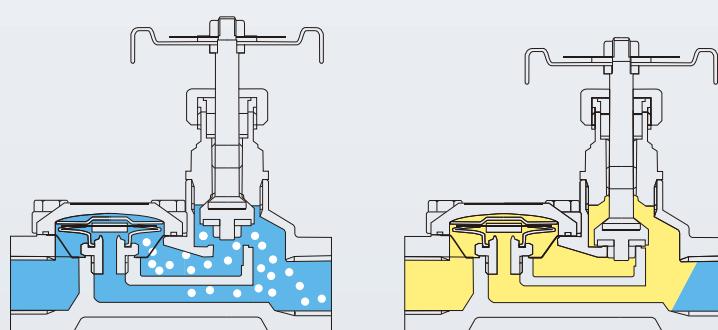

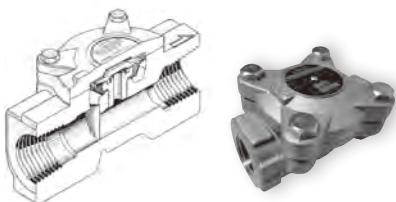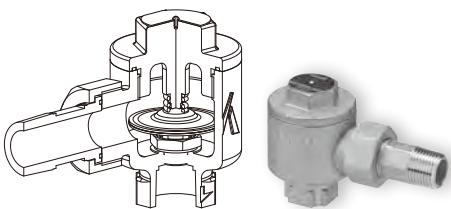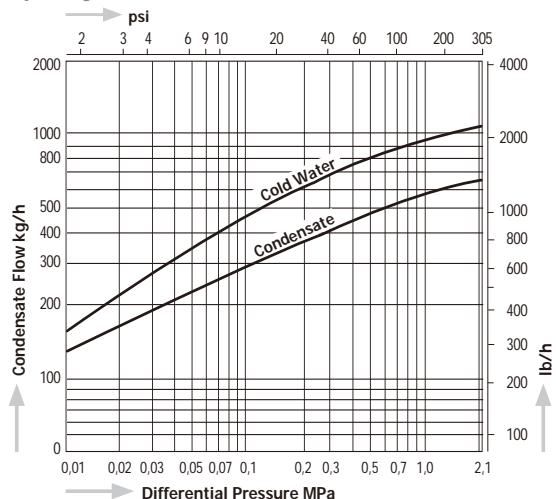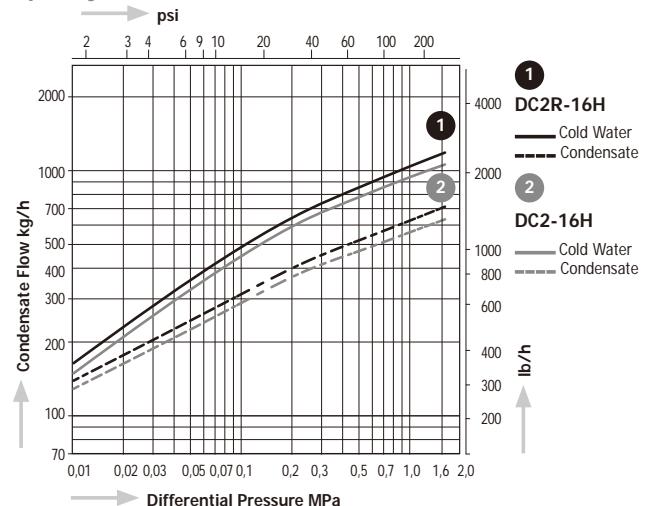
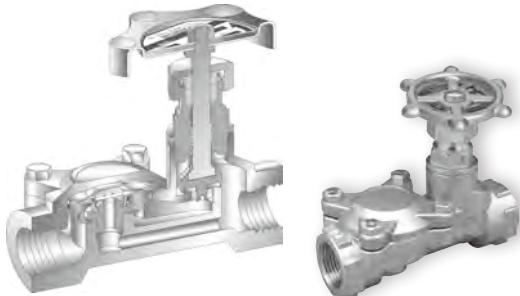
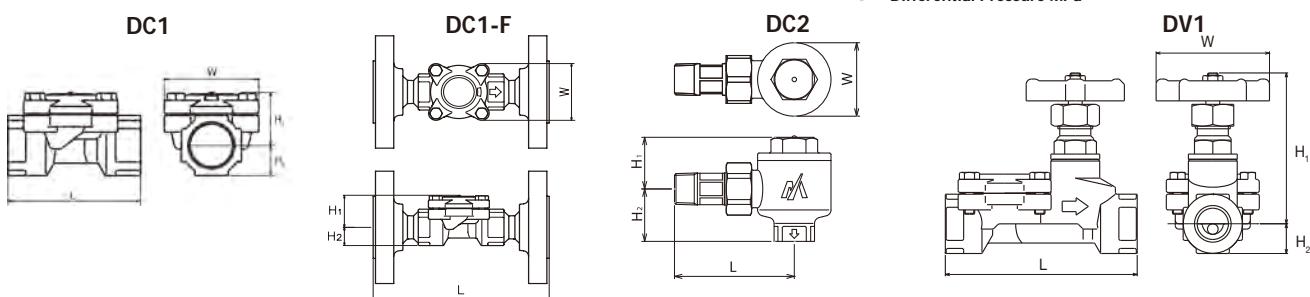
SERIES D Balanced Pressure Thermostatic Steam Trap**DC1****DC2****Capacity Chart DC1****Capacity Chart DC2****DV1 with Bypass Valve****Dimensions**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight kg	Weight lb	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2			
DC1-21H DC1-21L	Screwed Rc, NPT	1/4", 3/8"	2,1	305	220	428	65	29	11	2.6	1.1	0.4	Stainless Steel SCS13A	0,4	0,9	
		1/2", 3/4"					75	31	17	53	3.0	1.2	0.7	0,5	1,1	
		1"					80	34	21		3.1	1.3	0.8	0,5	1,1	
DC1-21HF DC1-21LF	Flanged JIS, ASME, DIN	1/2"					150	31	17	53	5.9	1.2	0.7	Stainless Steel SCS13A	1,3	2,9
		3/4"					160	34	21		6.3	1.3	0.8		2,2	4,9
		1"													3,1	6,8
DC2R-16H DC2-16H	Inlet: R Outlet: Rc, NPT	1/2"	1,6	230	220	428	80	35	35	49	3.1	1.4	1.4	1,9	0,7	1,5
DV1-10	Screwed Rc, NPT	1/2", 3/4"	1,0	145	185	365	110	88	17	65	4.3	3.5	0.7	2,6	0,9	1,9

DC2R-16H – Type with bypass orifice to prevent residue of condensate in steam traps.

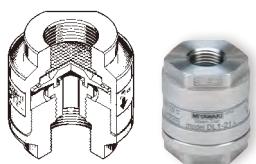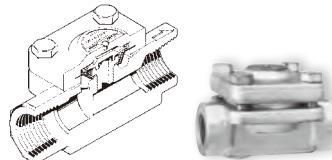
DL1**DX1****DF1**

Dimensions

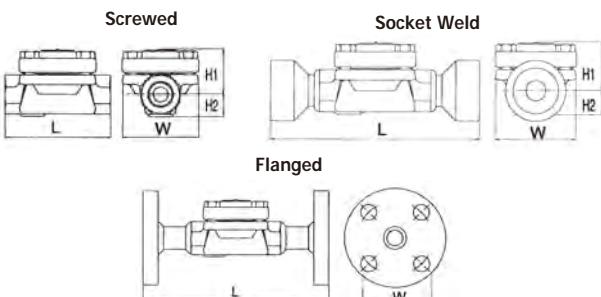
DL1**DX1****DF1**

Special face-to-face dimensions available.

Capacity Chart DL1, DF1





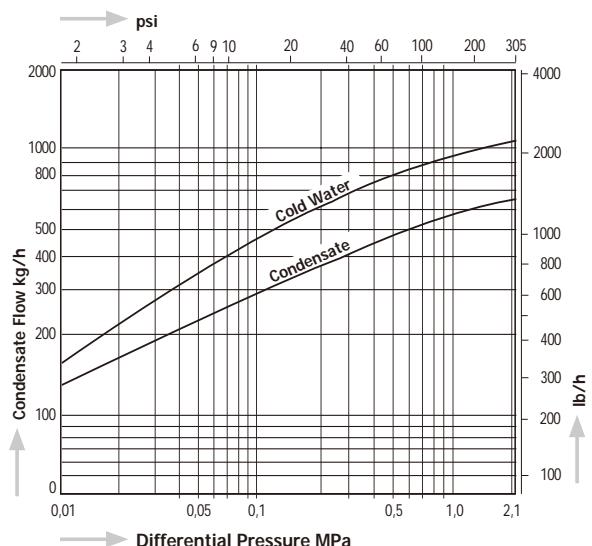


Capacity Chart DX1

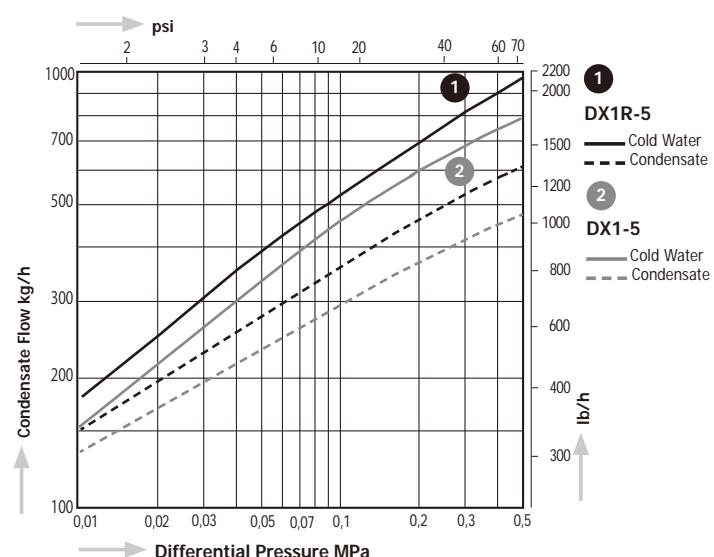

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb	
DL1-21H DL1-21L	Screwed Rc, NPT	1/4 "	2,1	305	220	428	60				48	2.4		1.9	Stainless Steel SCS13		
		3/8 "													0,7	1.5	
		1/2 "															
		3/4 "															
		1 "															
DL1-10C	Screwed Rc, NPT	1/4 "	1,0	145	220	428	60				48	2.4		1.9	Stainless Steel SCS13		
		3/8 "															
		1/2 "															
		3/4 "															
		1 "															
DX1-5 DX1R-5	Tri-Clamp	38 mm	0,5	72,5	160	320	30				51	1.2			2,0	Stainless Steel SUS316	0,2 0,44
DF1-21H DF1-21L	Screwed Rc, NPT	1/2 "	2,1	305	235	455	85	36	18	62	3,4	1,4	0,7	2,4	Forged Steel A105		
		3/4 "					100	40	23		3,9	1,6	0,9		1,0 2,2		
		1 "					160	36	18		6,3	1,4	0,7		1,3 2,9		
DF1-21HW DF1-21LW	Socket Weld JIS, ASME, DIN	1/2 "	2,1	305	235	455	175	36	18	62	6,9	1,4	0,7	2,4	Forged Steel A105		
		3/4 "					195	40	23		7,7				1,4 3,1		
		1 "					215				8,5				2,1 4,6		
DF1-21HF DF1-21LF	Flanged JIS, ASME 150, 300 lb	1/2 "	2,1	305	235	455	150	36	18	62	5,9	1,4	0,7	2,4	Forged Steel A105		
		3/4 "					175				7,7				3,3 7,3		
		1 "					195				8,5				4,0 8,8		
	DN15						215				6,3				2,3 5,0		
	Flanged DIN PN40	DN20					150				5,9				3,6 7,9		
		DN25					160				6,3				4,3 9,5		

DX1R-5 – Type with bypass orifice to prevent residue of condensate in steam traps.

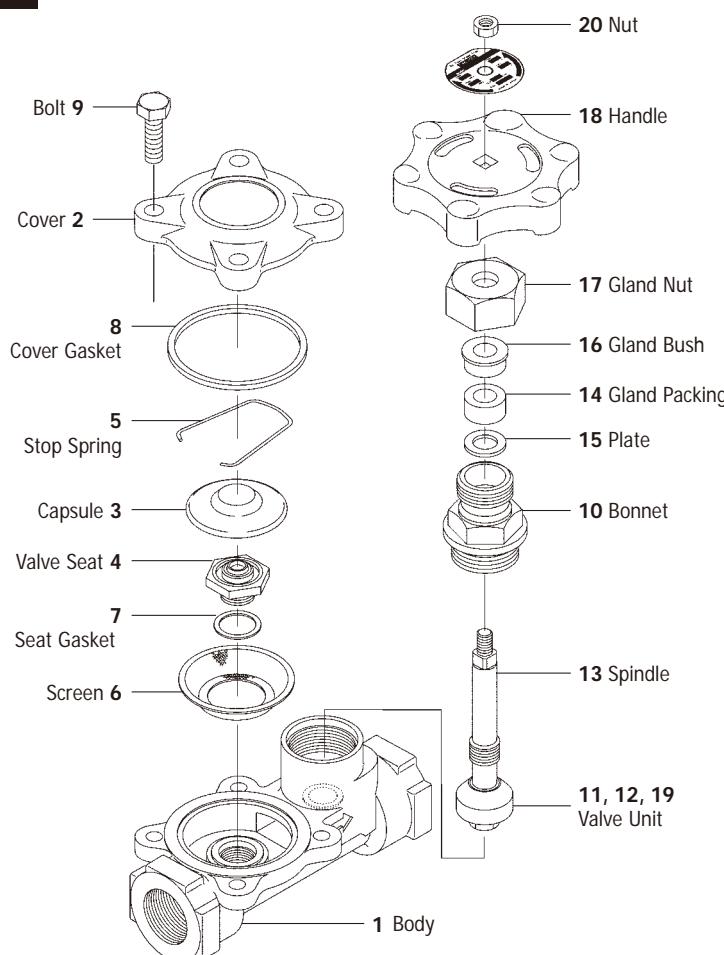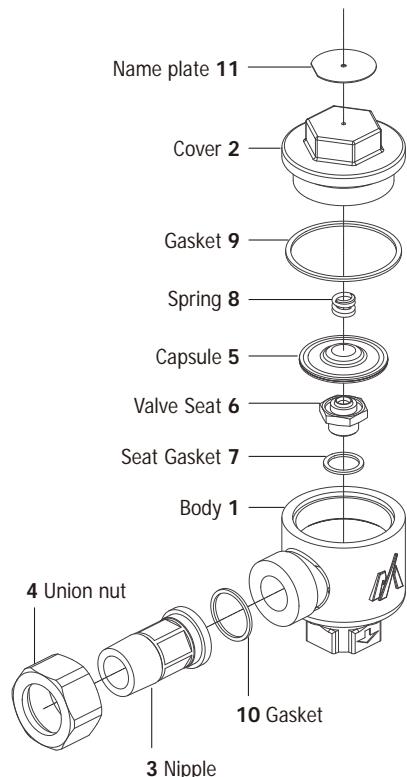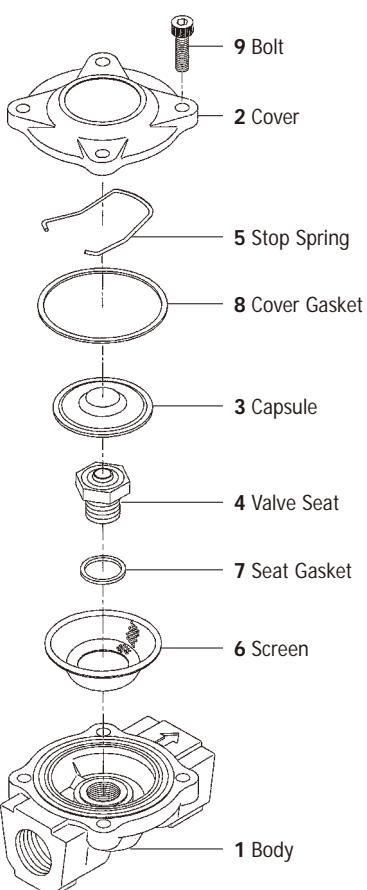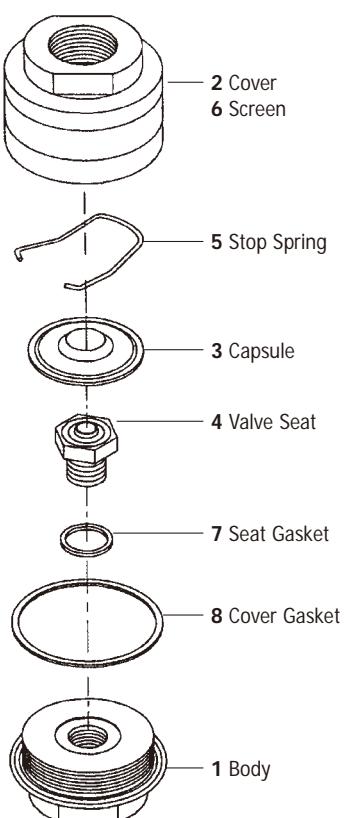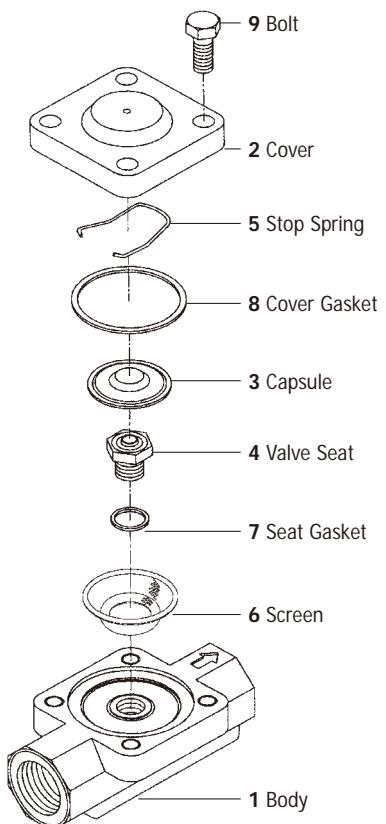SERIES D Spare Parts**DV1****DC2****DC1****DL1****DF1**

Thermodynamic Disc Traps

SERIES S

Thermodynamic steam traps operate on the basis of the Bernoulli principle, depending on the relationship between the velocity and the pressure exerted by the condensate and steam inside the steam trap.

They have only one moving part – the disc.

Due to their compact design and cost effectiveness thermodynamic steam traps are widely used in applications where the condensate must be removed immediately from steam lines and steam equipment. They discharge the condensate near the saturation temperature. The traps may operate up to a back pressure of 80% of the inlet pressure, but for smooth operation it is recommended that the back pressure does not exceed 50% of the inlet pressure. Thermodynamic steam traps discharge the condensate intermittently.

All steam traps are equipped with a hardened stainless steel disc and seat. After the lapping process all disc surfaces are controlled individually before releasing them for use in steam traps. These features and very high and severe quality standards for the whole production process give MIYAWAKI's thermodynamic steam traps a long and reliable service life.

Models S31N

SC31	Ductile Cast Iron Steam Traps with replaceable internals
SC, SF	Stainless steel steam traps with replaceable internals
SV	Cast Iron Steam Traps for high capacity
SL3	Steam Traps with inbuilt bypass
SU2N, SU2H, SD1	Compact, very small trap for low capacity applications
S55N, S55H, S61N, S62N	Stainless steel steam traps for low to high pressure applications
	Forged steel steam traps for high pressure applications

Features

- Immediate discharge of condensate
- Insensitive to waterhammer, superheated steam and freezing
- Most types contain a bimetal ring which improves the ability of the trap to discharge air and cold condensate quickly at start-up and prevents air locking during times of operation
- Can be installed in vertical or horizontal position
- In case of danger of air locking special discs available
- All traps equipped with additional cover for reduced frequency of cycling and energy savings
- All traps with inbuilt strainers (except SL3)
- Easy maintenance


Suitable for

light to medium condensate loads: steam tracing, steam main drips, small heat exchangers, unit heaters, sterilizers and many other applications in the petrochemical, chemical, textile, food, pharmaceutical and further industries. Series SV Thermodynamic steam traps with inbuilt bypass are designed for special applications in the food, pharmaceutical or other industries or for laundry applications where costs and space must be saved.

Operating principle


 cold condensate  hot condensate  steam

1




At the time of start-up the pressure of the incoming cold condensate and air raise the disc and water and air are discharged quickly.

2




When hot condensate flows into the trap, the trap is still open and the hot condensate can be discharged quickly.

3














After hot condensate flows into the trap, steam enters it. As the velocity of the fluid increases, the pressure under the seat exerted by the steam decreases. At the same time the pressure in the pressure chamber above the disc increases. The disc is pressed down and closes.

4






While hot condensate flows into the trap, the trap remains closed for a certain period, as far as the steam inside the pressure chamber does not condense. The more condensate flows into the trap, the more the temperature cools down. The steam inside the pressure chamber also cools down and condenses. As a result, the pressure of the incoming condensate raises the disc and condensate is discharged. Cycles 2, 3 and 4 repeat.

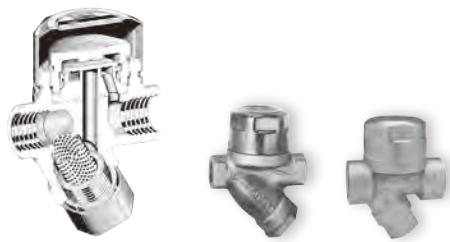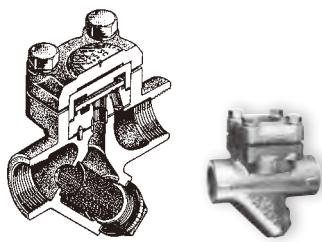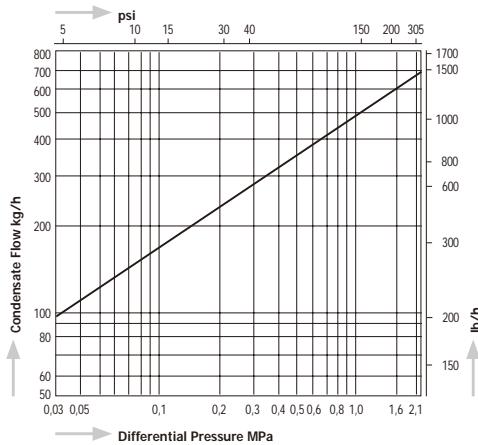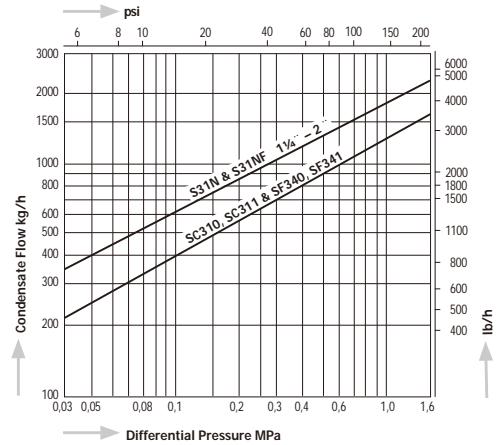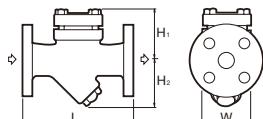
S31N, SC31**SC, SF****Capacity Chart****SC31 & SC31F/S31N & S31NF ½" – 1"****Capacity Chart****S31N & S31NF 1¼" – 2"; SC310, SC311 & SF340, SF341****Dimensions****S31N/SC31 ½" – 1"****S31NF ½" – 1"****SC31F ½" – 1"****S31N 1¼" – 2"**
SC310, SC311**S31NF 1¼" – 2"**
SF340, SF341

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
SC31	Screwed Rc, G, NPT	½"	2,1	305	220	428	78	55			3.1	2.2			Stainless Steel SCS14	1,0	2.2
		¾"					90				3.5					1,3	2.9
		1"					95				3.7					1,2	2.6
SC31F	Flanged JIS, ASME	½"					143				5.6				Stainless Steel SCS14+SUSF304	2,7	6.0
		¾"					155				6.1					3,9	8.6
		1"					175				6.9					4,7	10.4
		1¼"					185				7.3				Stainless Steel SCS14+SUS304	4,2-5,5 *1	9.3-12.1 *1
		1½"					195				7.7					5,0-7,3 *1	11.0-16.0 *1
		2"					150	61	59	61	5.9	2.4	2.3	2.4		6,6-8,2 *1	14.6-18.1 *1
	Flanged DIN	DN15					160				6.3					2,7	6.0
		DN20														3,9	8.6
		DN25														4,7	10.4
S31N	Screwed Rc, NPT	½"	1,6	230	220	428	90	55			3.5	2.2			Ductile Cast Iron FCD450	1,1	2.4
		¾"					60	65	60		3.7					1,2	2.6
		1"					95									1,3	2.9
		1¼"					180	104	100	106	7.1	4.1	3.9	4.2	Cast Iron FC250	8,0	17.6
		1½"					111				4.4					8,7	19.1
		2"														9,3	20.5
		2½"					140	55			5.5	2.2			Ductile Cast Iron FCD450	2,3-2,7 *1	5.1-6.0 *1
S31NF	Flanged JIS, ASME, DIN	¾"					150	65	60		5.9	2.4	2.6	2.4		2,9-3,9 *1	6.4-8.6 *1
		1"					160	60			6.3					3,6-4,7 *1	7.9-10.3 *1
		1¼"					240	104	100	106	9.5	4.1	3.9	4.2	Cast Iron FC250	12,0	26.4
		1½"														13,5	29.7
		2"					180	87	81	96	7.1	3.4				14,5	31.9
		2½"					240	89			9.5	3.5	3.2	3.8	Cast Iron FC250	6,0	13.2
		3"														10,0	22.0
SC -	310	Screwed Rc, NPT					¾"										
	311						1"										
SF -	340	Flanged JIS, ASME, DIN					¾"										
	341						1"										


*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

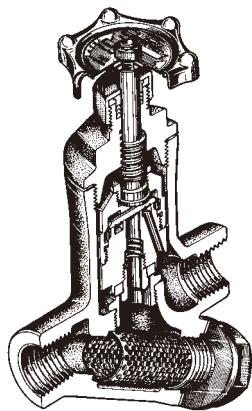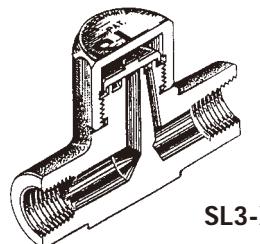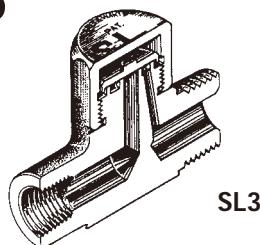SV**SL3**


Capacity Chart SV-N

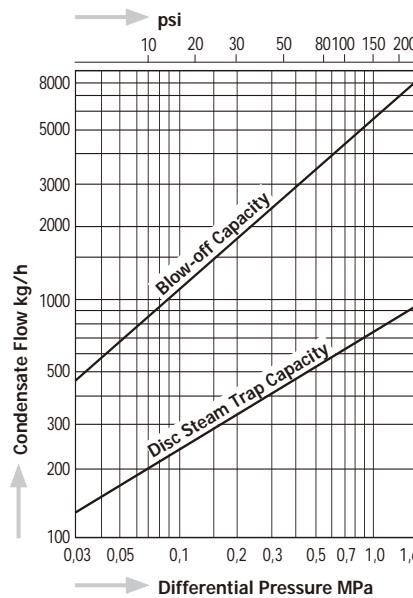


Capacity Chart SV1

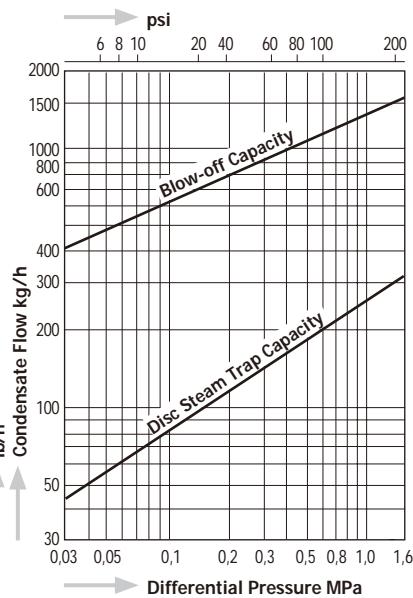

Capacity Chart SL3

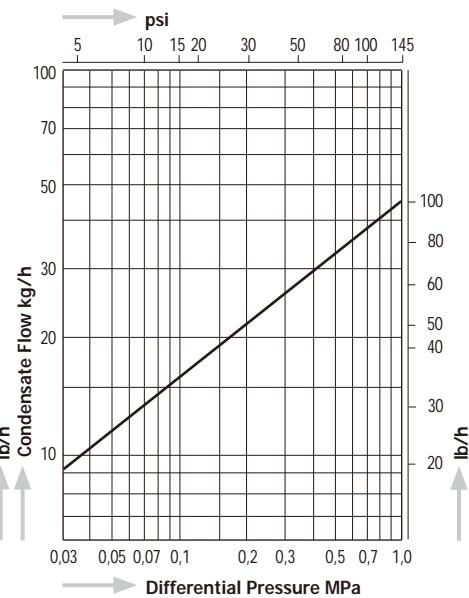


Dimensions

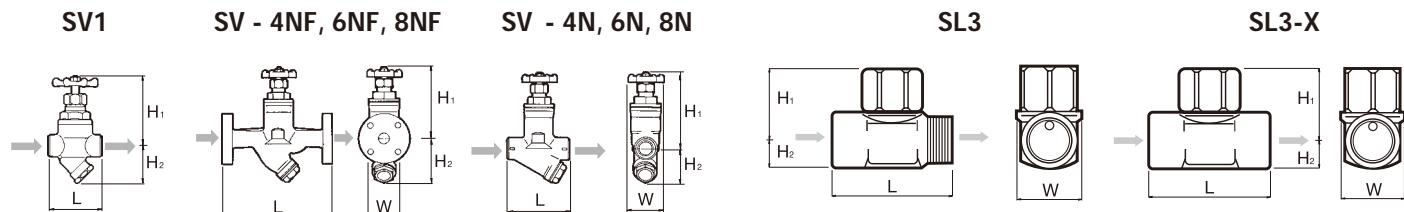


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb	
SV1	Screwed Rc, NPT	3/8", 1/2" 3/4", 1"					75 107	105 53	65	3.0 4.1 4.2	2.1	2.6		Cast Steel WCB	1,0 1,2	2.2 2.6	
SV -	Screwed Rc, NPT	1/2"	1,6	230	220	428	110	60		4.3	2.4			Cast Iron FC250	2,4	5.3	
		3/4"					120	155 65	65	4.7	6.1	2.6	2.6		2,5	5.5	
		1"						70			2.8				2,7	5.9	
	Flanged JIS, ASME, DIN	1/2"					220	150	90	65	8.7	5.9	3.5	2.6	4,1	9.0	
		3/4"									9.1				4,7	10.3	
		1"					230								5,2	11.5	
SL3	Screwed Inlet : Rc, NPT Outlet: G	1/4"	1,0	145	400	752	40	22	8	19	1.6	0.9	0.3	0.7	Stainless Steel SUS416	0,06	0.13
SL3-X	Screwed Rc, NPT	1/4"	1,0	145	400	752	40	22	8	19	1.6	0.9	0.3	0.7		0,06	0.13

SU2N, SU2H

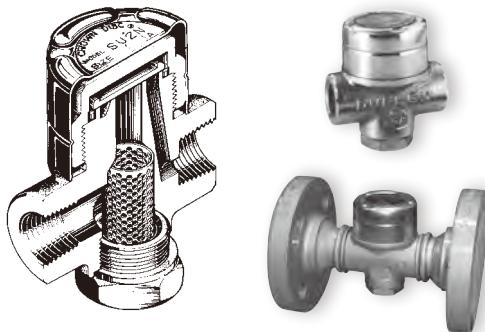


Special face-to-face dimensions available.


Capacity Chart SU2N, SU2H

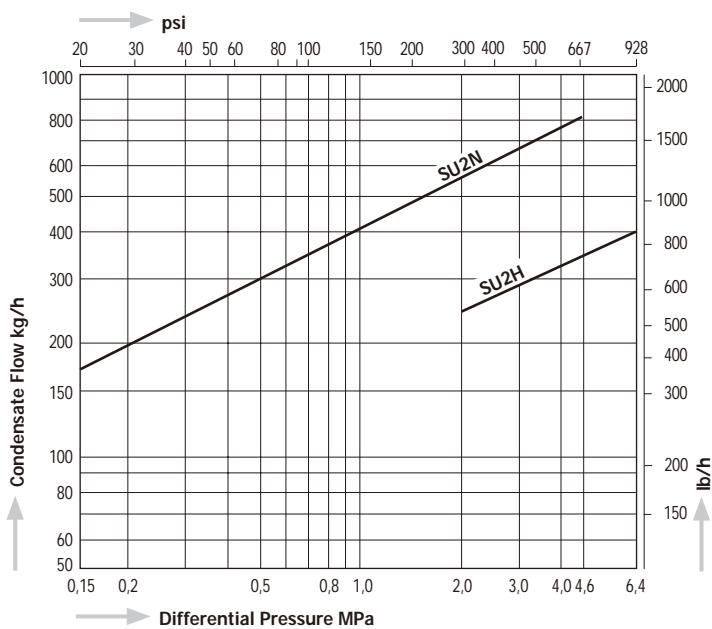


SD1

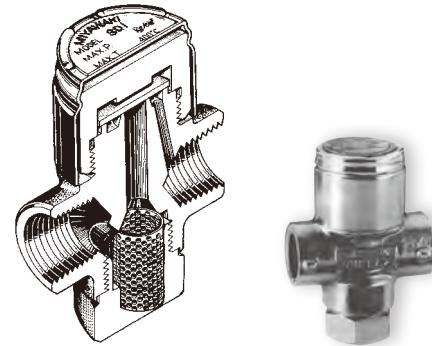


Capacity Chart SD1

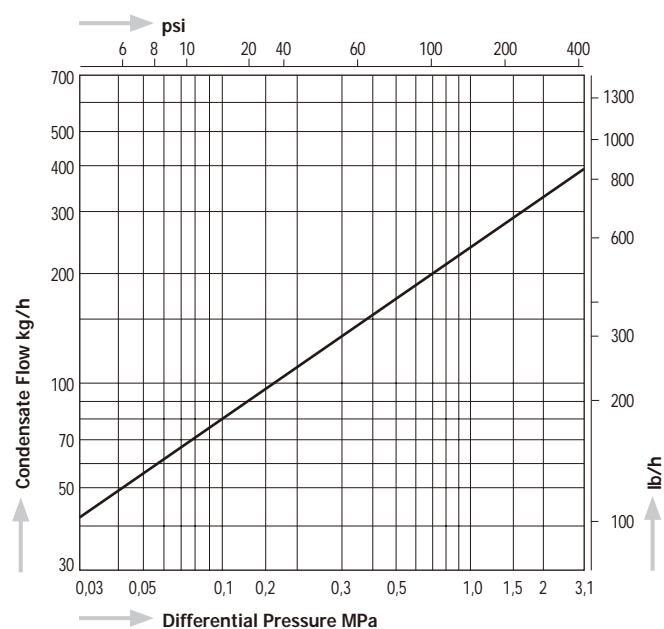


Dimensions SU2N, SU2H




SU2NW, SU2HW

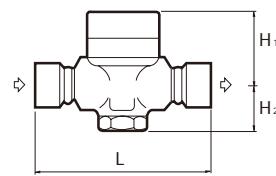

SU2NF, SU2HF

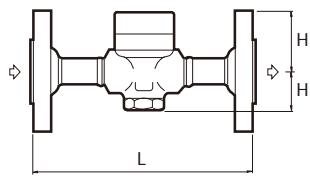


SD1

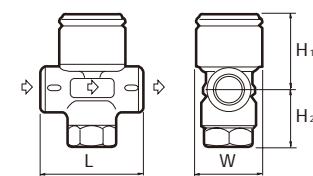


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
SU2N (SU2H)	Screwed Rc, NPT	1/2"	4,6 (6,4)	667 (928)	800	70	47	32	53	2.8	1.9	1.3	2.1	Stainless Steel SUS420J2	0,8	1.8	
		3/4"				75	51			3.0	2.0				0,9	2.0	
		1"				140	47	32	53	5.5	1.9	1.3	2.1		1,4	3.1	
		1/2"				205	47	32	53	8.1	1.9	1.3	2.1		1,3	2.9	
SU2NW (SU2HW)	Socket Weld JIS, ASME, DIN	3/4"				150	47	32	53	5.9	1.9	1.3	2.1		1,2	2.6	
		1"				160				6.3					2,7	5.9	
		DN15													3,7	8.1	
		DN20													4,3	9.5	
SU2NF (SU2HF)	Flanged JIS, ASME	DN25													2,6	5.7	
		1/2"													3,3	7.3	
		3/4"													3,8	8.4	
		1"															
SD1	Screwed Rc, NPT	1/4"	3,1	450	400	752	52	39	25	34	2.0	1.5	1.0	1.3	Stainless Steel SUS420J2	0,3	0.7
		3/8"					60	41	23		2.4	1.6	0.9				
		1/2"															

S55N, S55H

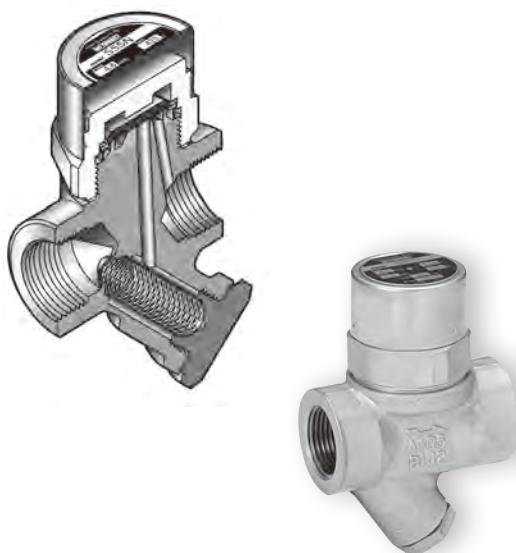

Capacity Chart S55N, S55H

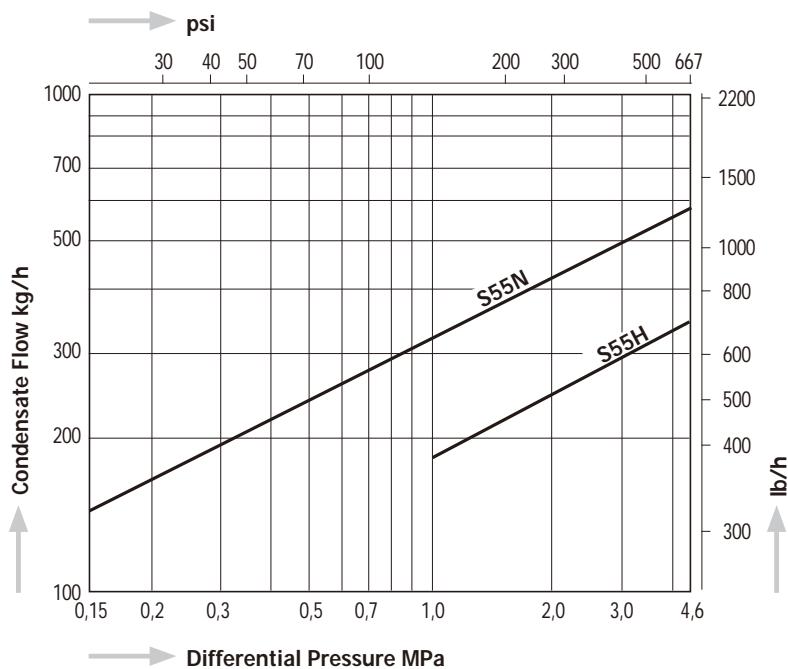

Dimensions

**S55N, S55H,
S55NW, S55HW**

S55NF, S55HF



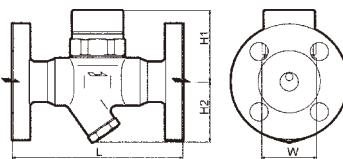


Table 1: Weights


Model	Size (in)	JIS 10/16K		JIS 20K		JIS 30/40K		ASME 150lb		ASME 300lb		ASME 600lb		DIN PN40		DIN PN100	
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
S55NF S55HF	1/2"	2,4	5.3	2,6	5.7	3,8	8.4	2,4	5.3	2,9	6.4	3,0	6.6	3,1	6.8	3,7	8.2
	3/4"	2,9	6.4	3,1	6.8	4,2	9.3	2,9	6.4	3,8	8.4	4,0	8.8	3,7	8.2	5,3	11.7
	1"	4,0	8.8	4,3	9.5	5,4	11.9	4,0	8.8	5,3	11.7	5,5	12.1	4,4	9.7	6,3	13.9

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight		
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb	
S55N (S55H)	Screwed Rc, NPT	1/2"					70	60	52	45	2.8	2.4	2.0	1.8	Forged Steel A105		1,0	2.2
		3/4"															1,2	2.6
		1"															Table1	Table1
S55NF (S55HF)	Flanged JIS, ASME	1/2"					140	60	52	45	5.5	2.4	2.0	1.8	Forged Steel A105		Table1	Table1
		3/4"															Table1	Table1
		1"															Table1	Table1
S55NF (S55HF)	Flanged DIN	DN15					175	60	52	45	6.9	2.4	2.0	1.8	Forged Steel A105		Table1	Table1
		DN20															Table1	Table1
		DN25															Table1	Table1
S55NW (S55HW)	Socket Weld JIS, ASME, DIN	1/2"					150	60	52	45	5.9	2.4	2.0	1.8	Forged Steel A105		1,0	2.2
		3/4"															Table1	Table1
		1"															Table1	Table1

S61N, S62N

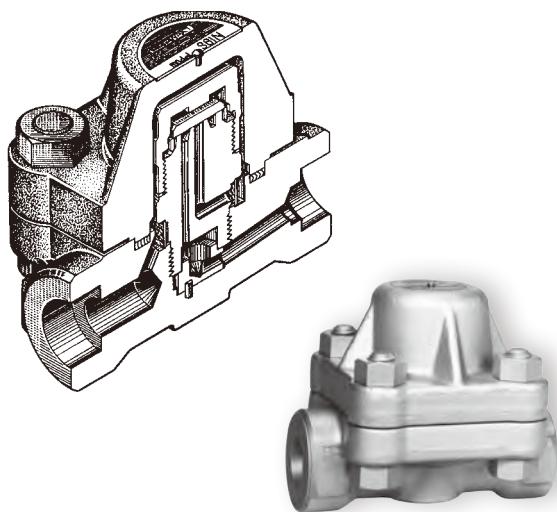


Capacity Chart S61N, S62N

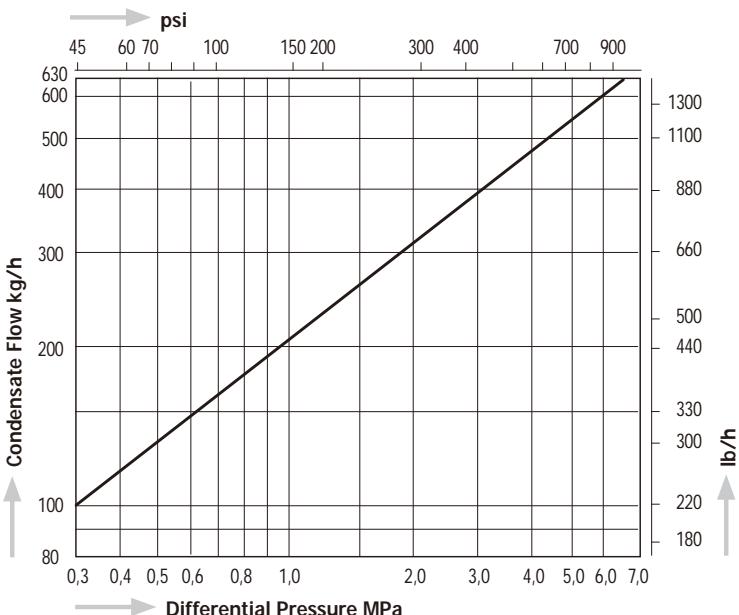

Dimensions

S61N, S62N

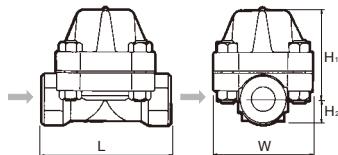

S61NF, S62NF


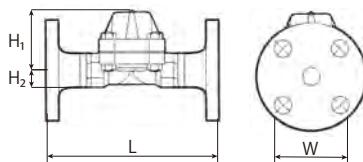








Table 1: Dimensions L and Weight

Model	Size (in)	JIS 30K				JIS 40K				JIS 63 K			
		mm	in	kg	lb	mm	in	kg	lb	mm	in	kg	lb
S61NF	1/2"	200	7.9	8,4	18.5	200	7.9	8,7	19.2	220	8.7	9,6	21.2
S62NF	3/4"	210	8.3	8,9	19.6	210	8.3	9,2	20.3	230	9.1	11,1	24.5
	1"	240	9.4	10,1	22.3	240	9.4	10,5	23.1	240	9.4	12,1	26.7


Model	Size (in)	ASME Class 300				ASME Class 600				ASME Class 900			
		mm	in	kg	lb	mm	in	kg	lb	mm	in	kg	lb
S61NF	1/2"	200	7.9	7,2	15.9	200	7.9	7,3	16.1	220	8.7	9,6	21.2
S62NF	3/4"	210	8.3	8,2	18.1	210	8.3	8,5	18.7	230	9.1	10,9	24.0
	1"	240	9.4	9,4	20.7	240	9.4	9,6	21.2	240	9.4	13,3	29.3

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight						
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb					
S61N (S62N)	Screwed Rc, NPT	1/2"	6,5	943	425 (S62N: 475)	800 (S62N: 887)	130	90	25	100	5.1	3.5	1.0	3.9	Forged Steel A105 (S62N: A182F22)	5,7	12.6					
S61NF (S62NF)		1/2"					Table 1	90	25	100	Table 1	3.5	1.0	3.9		Table 1	Table 1					
		3/4"					210	8.3	9.1	9.1						9,4	20.7					
		1"					230									11,4	25.1					
S61NW (S62NW)	Socket Weld JIS, ASME, DIN	1/2"	6,5	943	425 (S62N: 475)	800 (S62N: 887)	130	90	25	100	5.1	3.5	1.0	3.9	Forged Steel A105 (S62N: A182F22)	12,5	27.6					
		3/4"					Table 1	5,7	12.6													
		1"					230															

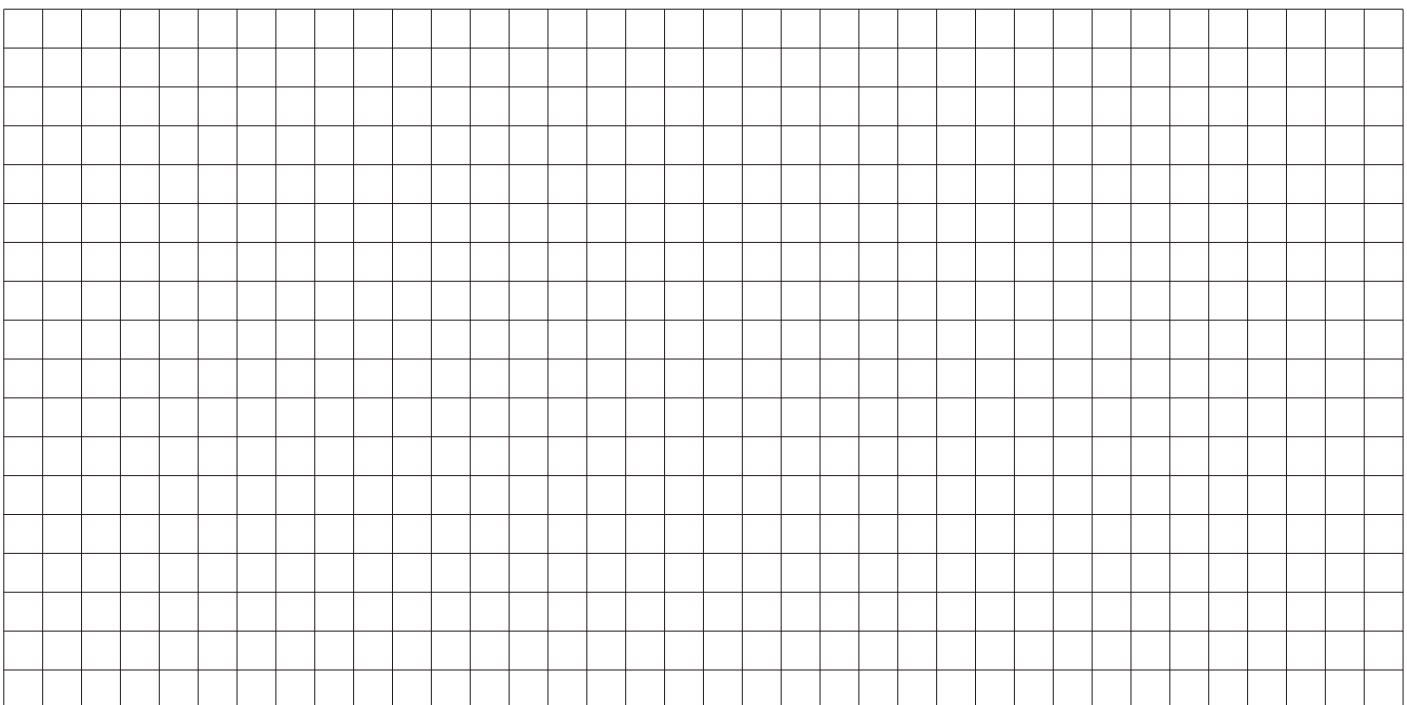


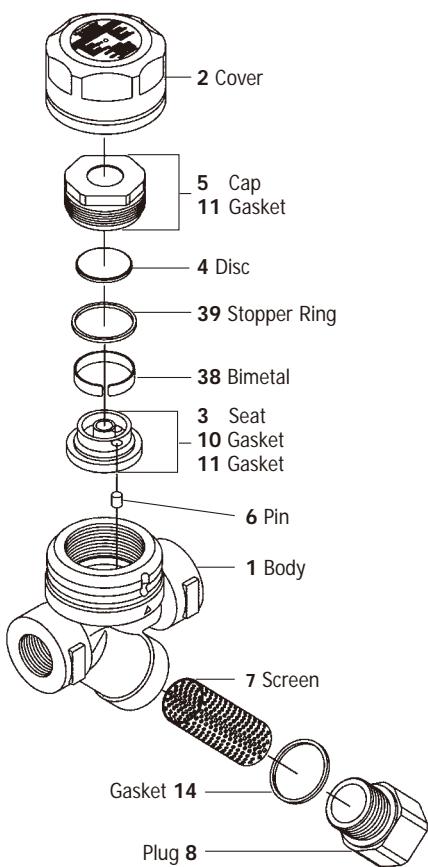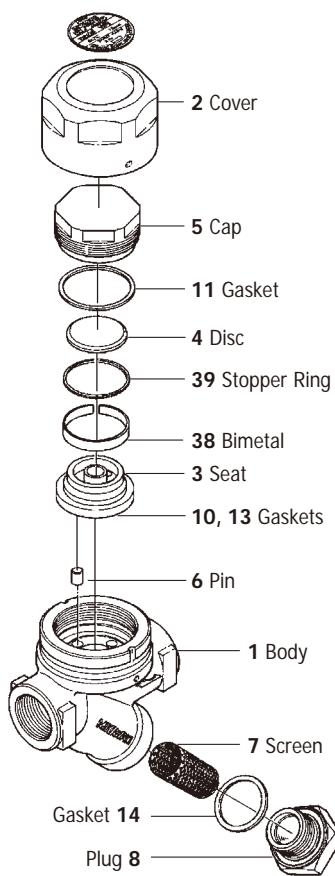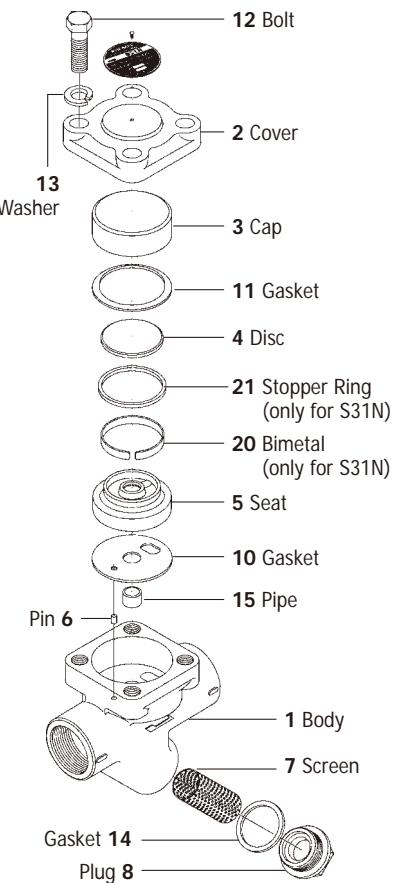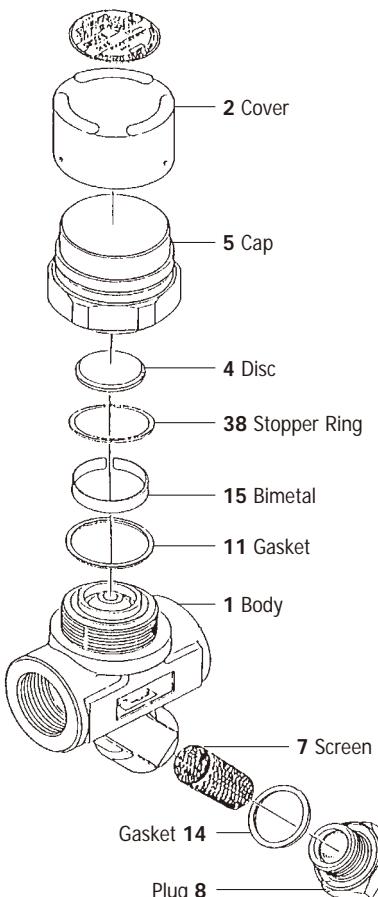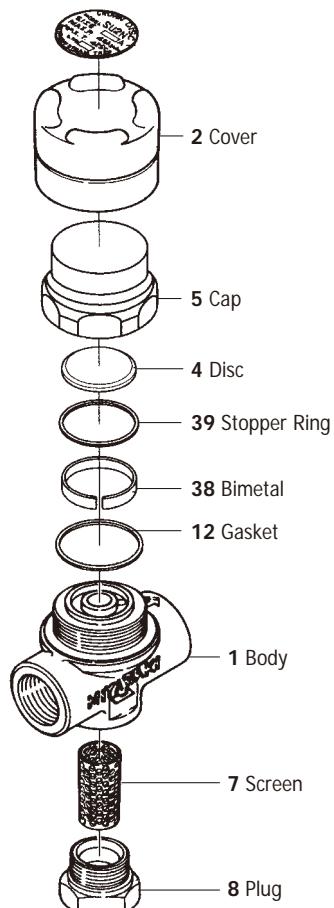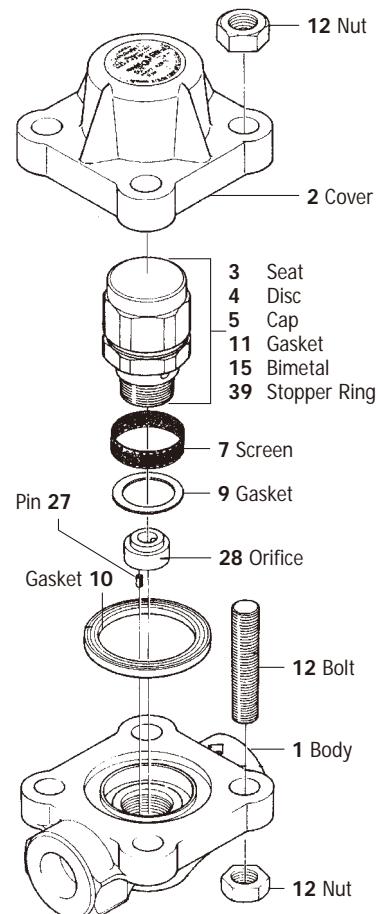SERIES S Spare Parts**SC31****S31N (1/2"-1")****S31N (1 1/4"-2"), SC, SF (3/4"-1")****S55N/S55H****SU2N/SU2H****S61N/S62N**


SV1

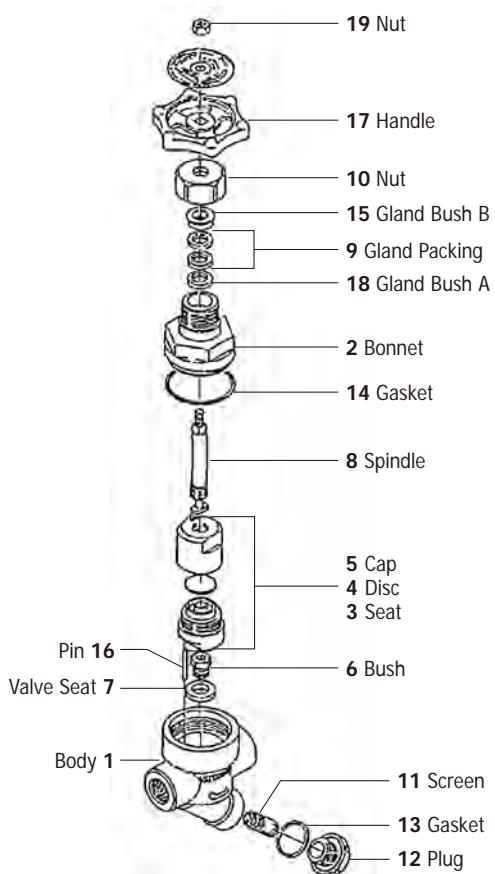


SV-N

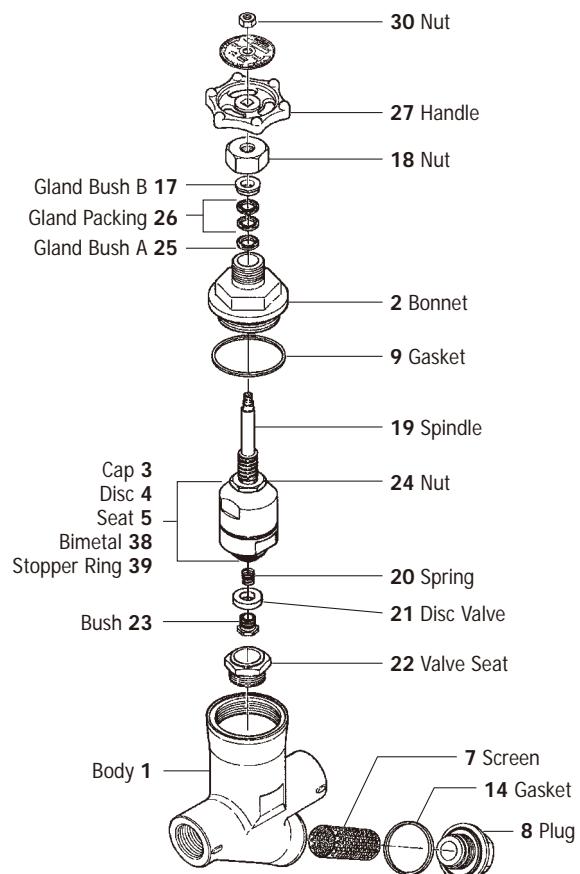


SL3

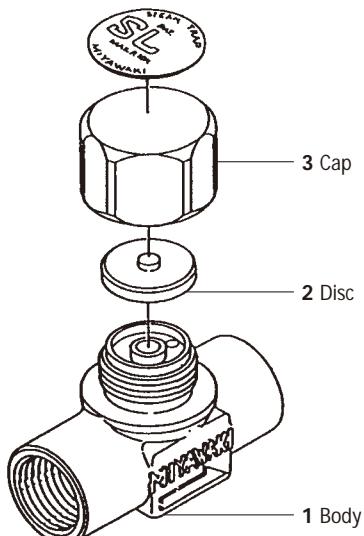

SD1

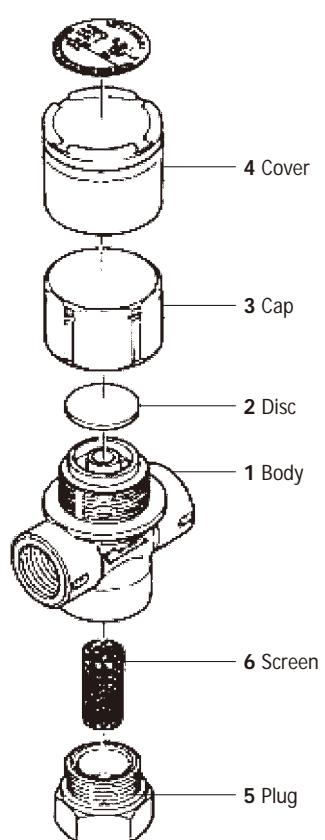

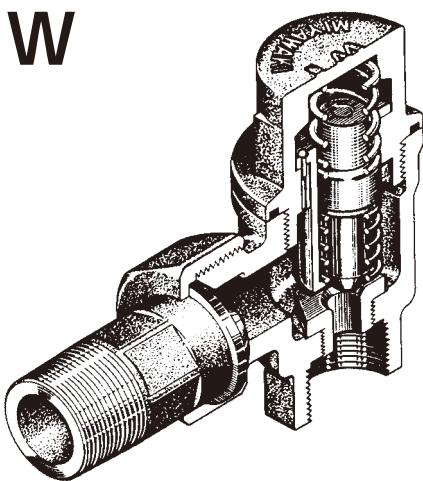
SERIES W Thermostatic Radiator Trap

W1



W2

W1, W2, W3

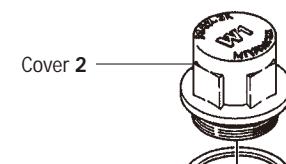

Cover 2

Gasket 10

Spring 9

Thermo-Element 7

Valve 4

Spring 8

Guide Stopper 6

Guide Tube 5


Valve Seat 3

Body 1

12 Nipple

11 Union Nut


Capacity Chart W1, W2, W3

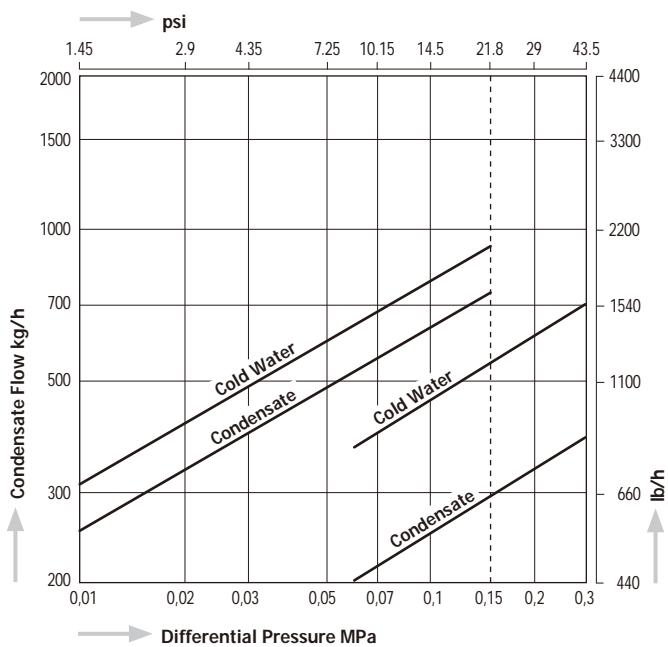**The opening temperature of the valve is preset**


- at about 97°C (207° F) for W1-1,5, W2-1,5 and W3-1,5
- at about 115°C (239° F) for W1-3, W2-3 and W3-3

Dimensions


W1

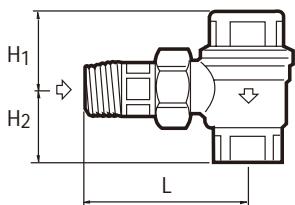

W2



W3

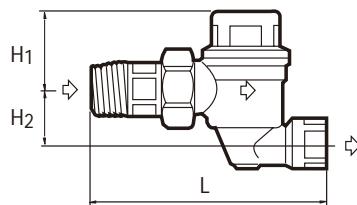

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	L	H1	H2		kg	lb		
W1-1,5	Screwed Rc, NPT	1/2"	0,15	21.8	150	302	80	35	3.1	1.4	Brass C3771		0,5	1.1			
		3/4"					87	41	3.4	1.6			0,6	1.3			
W1-3		1/2"	0,3	43.5			80	35	3.1	1.4			0,5	1.1			
		3/4"					87	41	3.4	1.6			0,6	1.3			
W2-1,5	Screwed Rc, NPT	1/2"	0,15	21.8	150	302	35	41	1.4	1.7	Brass C3771		0,4	0.9			
		3/4"					41	35					0,5	1.1			
W2-3		1/2"	0,3	43.5			35	41					0,4	0.9			
		3/4"					41	35					0,5	1.1			
W3-1,5	Screwed Rc, NPT	1/2"	0,15	21.8	150	302	123	28	4.8	1.1	Brass C3771		0,6	1.3			
		3/4"					123	34	5.3	1.4			0,7	1.5			
W3-3		1/2"	0,3	43.5			135	28	4.8	1.1			0,6	1.3			
		3/4"					135	34	5.3	1.4			0,7	1.5			

Inverted Bucket Steam Traps

SERIES E

Inverted Bucket Steam Traps belong to the family of mechanical traps. They operate on the difference in density between steam and water. MIYAWAKI offers a very wide range of inverted bucket steam traps for small up to large condensate loads. Inverted bucket steam traps discharge the condensate intermittently.

Models ER	Cast Iron Inverted Bucket Steam Traps for medium up to high condensate loads
ES	Cast Iron Inverted Bucket Steam Traps for small up to medium condensate loads
ESH, ER25	Cast Steel Inverted Bucket Steam Traps for high pressure and small up to high condensate loads
ESU	Stainless Steel Inverted Bucket Steam Traps for small up to medium condensate loads


Features

- All traps are equipped with stainless steel wear and corrosion resistant lever, valve and seat system for long and troubleless life.
- All valves and seats are lapped together.
- Traps of the series E contain the patented SCCV® (Self Closing and Centering Valve) – System, which increases the lifetime of the valve and seat substantially.
- A small hole in the top of the bucket secures continuous automatic air venting.
- All traps are designed for quick and easy inline repairability.
- Withstands high back pressure (up to 90%).

Application

Heat exchangers, dryers, unit heaters, sterilizers and other applications, where condensate must be removed immediately


Super-Discharger

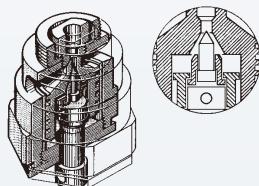

1. Incorporates the **MIYAWAKI SCCV®-System** (see pages 90 – 91)
2. Double valve system with needle pilot valve and main valve (for ER Type)
3. Operates by the pressure difference inside the valve unit
4. Makes the discharge capacity very large
5. Designed for high pressure up to 6,4 MPa (925 psig) – only for ER25

Operating principle

cold condensate hot condensate steam

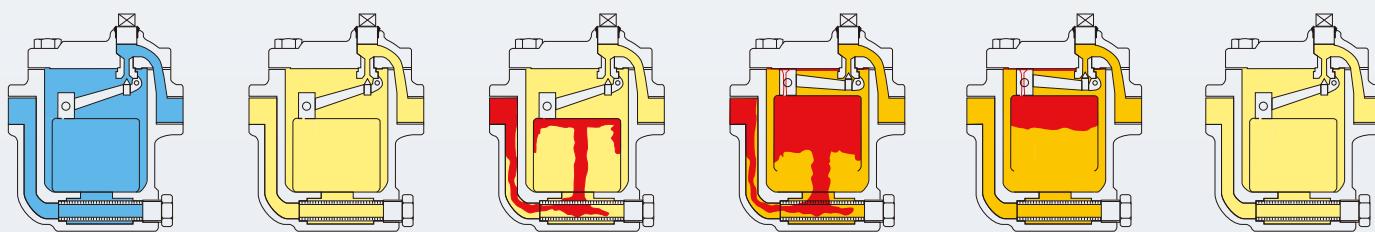

1 & 2





3 & 4

5 & 6

On start-up the bucket is down and the valve is open. Low temperature condensate and air, later high temperature condensate enter the trap. The condensate fills the bucket and the trap body completely. As the bucket is completely submerged in the water, it lies on the bottom of the trap, the valve is wide open and condensate will discharge.


Steam enters the trap under the bottom of the bucket. The more steam is entering the trap, the more it collects at the top of the bucket, causing the bucket to move upwards (buoyancy of the bucket inside the water). At the top position of the bucket the valve will close the seat.

Air and gases pass through a small hole in the top of the bucket and collect at the top of the trap. Steam is also passing through the hole and condensing. When more condensate is entering the trap, the bucket will lose its buoyancy and will move down. The valve will open and condensate will discharge.

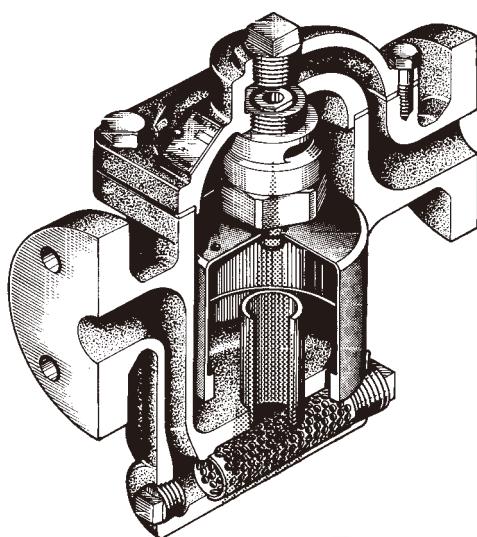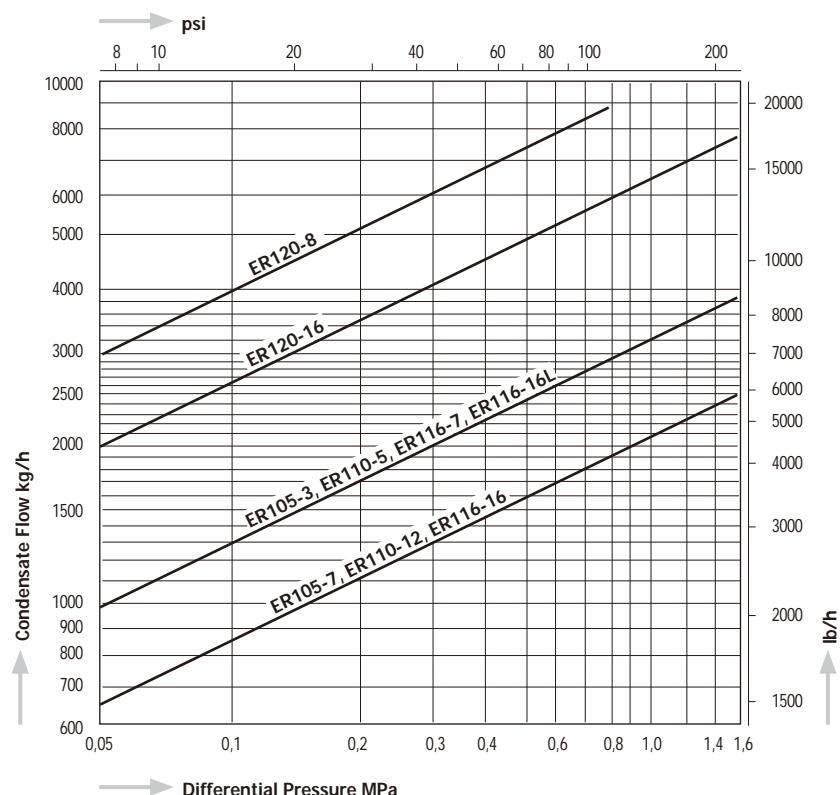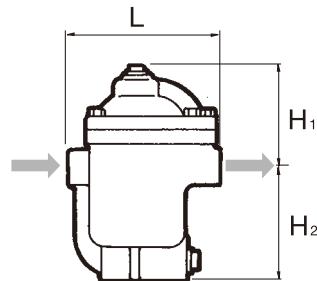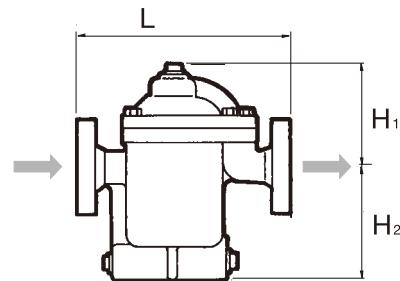
SERIES E Inverted Bucket Trap – Low Pressure / Large Capacity**ER****Capacity Chart ER****Dimensions****ER105****ER105F, ER110, ER116, ER120**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight									
			MPa	psig	°C	°F	L	H1	H2	L	H1	H2		kg	lb								
ER105 - 3 7	Screwed Rc, NPT	$\frac{3}{4}'' - 1\frac{1}{2}''$	0,3	43			190	155	134	7.5	6.1	5.3		10,2	22.5								
			0,7	100																			
ER105F - 3 7	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	0,3	43			254	155	134	10.0	6.1	5.3		Cast Iron FC250	13,6	29.9							
		$\frac{1}{2}'' - 1''$	0,7	100			260			10.2	6.1	5.3											
ER110 - 5 12	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	0,5	73			254	155	134	10.0	6.1	5.3		Cast Iron FC250	15,1	33.2							
		$\frac{1}{2}'' - 1''$	1,2	174			254	200	140	10.0	7.9	5.5											
ER116 - 7 16	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	0,7	100			300	190	132	11.8	9.1	5.2		Ductile Cast Iron FCD450	19,0	41.8							
		$\frac{1}{2}'' - 1''$	1,6	230			300	230	132	11.8	9.1	5.2											
ER120 - 8 16	Flanged JIS, ASME, DIN	$1\frac{1}{2}'' - 2\frac{1}{2}''$	0,8	116			220	400	220	217	15.8	8.7	8.5		Cast Iron FC250	46,0	101.2						


ER25

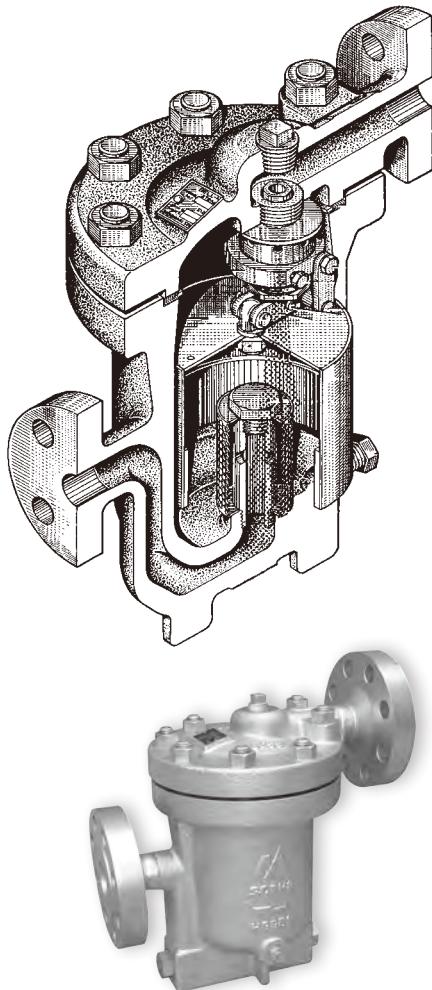

Capacity Chart ER25

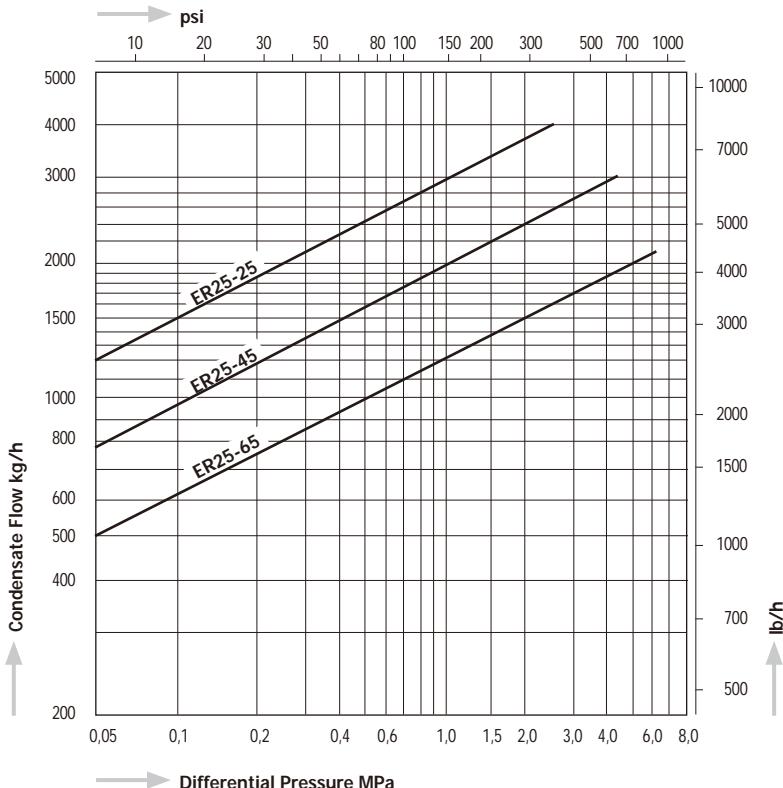

Dimensions ER25

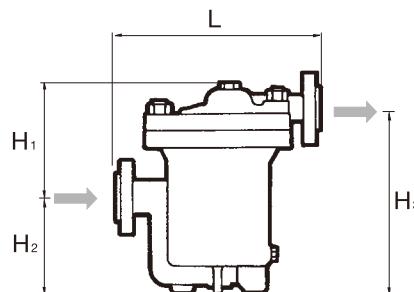

* Available options ER25

Max. operating temperature 470°C (878°F)
with body material WC6







Table 1: Dimensions

Size	Flange Standards						L (mm)	L (in)
	JIS 10 – 40 K		ASME 150 lb / 300 lb RF		DIN PN40			
$\frac{1}{2}'' - 1''$ (DN15 – 25)	ASME 600 lb RF		ASME 150 – 600 lb RJ		DIN PN63 / PN100 (DN15 / DN20)		340	13.4
	JIS 63 K		ASME 900 lb RF / RJ		DIN PN63 / PN100 (DN25)		345	13.6
	JIS 10 – 40 K		ASME 150 – 600 lb RF / RJ		–		380	15.0
$1\frac{1}{4}'' - 2''$ (DN32 – 50)	JIS 63 K		ASME 900 lb RF / RJ		DIN PN40 / PN63 / PN100		400	15.8

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	H3	L	H1	H2	H3	kg	lb	
ER25 -	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 2''$	2,5	360	425*	800	Table 1	210	180	345	Table 1	8.3	7.1	13.6	Cast Steel SCPH2	$\frac{1}{2}'' - 1''$ 51	112.2
			4,4	640											$1\frac{1}{4}'' - 2''$ 58	127.6	
			6,4	925													
ER25W -	Socket Weld JIS, ASME, DIN	$\frac{1}{2}'' - 2''$	2,5	360	425*	800	Table 1	210	180	345	Table 1	8.3	7.1	13.6	Cast Steel SCPH2	$\frac{1}{2}'' - 1\frac{1}{2}''$ 340	48
			4,4	640											$2''$ 380	105.6	
			6,4	925											$1\frac{1}{2}'' - 2''$ 13.4		
															$2''$ 15.0		



Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

SERIES E Inverted Bucket Trap – Low Pressure

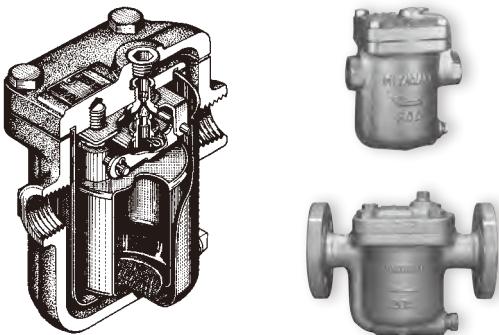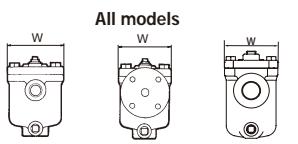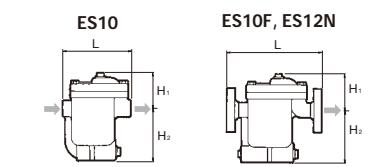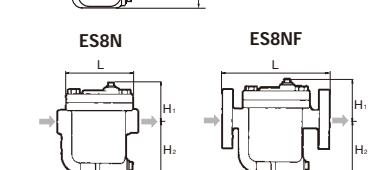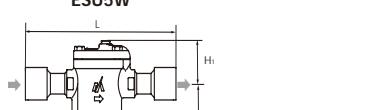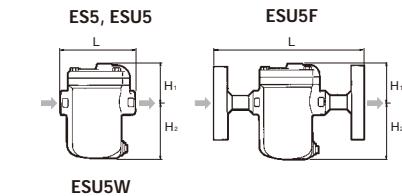ES**Dimensions****Available options**

Depending on the Maximum Operating Pressure the following models are available:


Model	Max. Operating Pressure	
	MPa	psig
ES5 - 3	0,3	43
ES5 - 7	0,7	100
ES5 - 11	1,1	160
ES5 - 16	1,6	230
ESU5 - 3	0,3	43
ESU5 - 7	0,7	100
ESU5 - 11	1,1	160
ESU5 - 16	1,6	230
ESU5 - 21	2,1	305
ES8N - 5	0,5	73
ES8N - 8	0,8	116
ES8N - 16	1,6	230
ES10 - 8	0,8	116
ES10 - 12	1,2	174
ES10 - 16	1,6	230

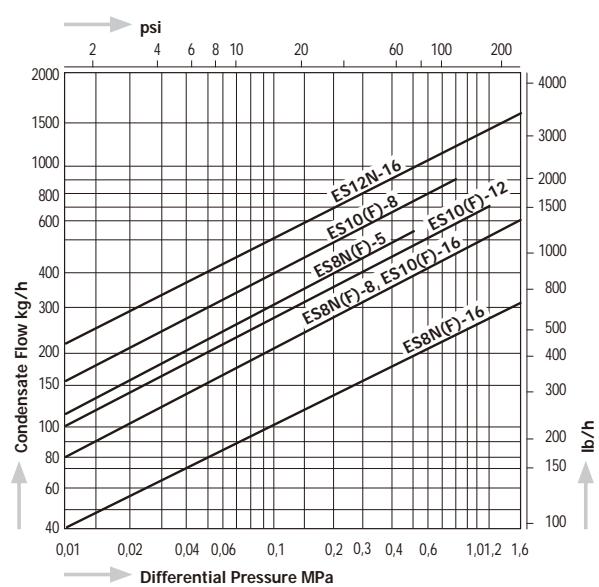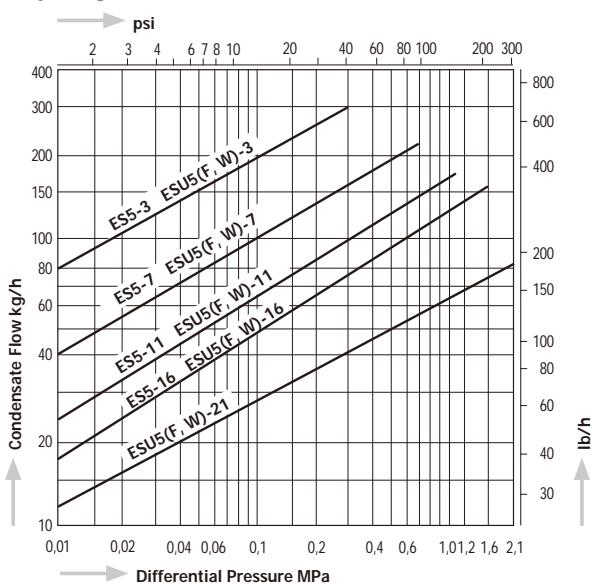Capacity Chart ES

Screwed Flanged Socket Weld


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight					
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb			
ES5	Screwed Rc, NPT	½"	1,6	230	350	662	103	59	67	75	4,1	2,3	2,6	3,0	Ductile Cast Iron FCD450	1,9	4,2		
		¾"					105	57	69		4,1	2,2	2,7			1,9	4,2		
		1"					109				4,3					2,0	4,4		
ESU5	Screwed Rc, NPT	½"	2,1	305			103			75	4,1			3,0	Stainless Steel SCS13A	1,9	4,2		
		¾"					105	57	69		4,1	2,2	2,7			2,0	4,4		
		1"					109				4,3					2,1	4,6		
ESU5F	Flanged JIS, ASME, DIN	½"	2,1	305			175			75	6,9			3,0	Stainless Steel SCS13A	3,5	7,7		
		¾"					195	57	69		7,7	2,2	2,7			3,7	8,2		
		1"					215				8,5					4,1	9,0		
ESU5W	Socket Weld JIS, ASME, DIN	½"	2,1	305			203			75	8,0			3,0	Stainless Steel SCS13A	2,5	5,5		
		¾"					230	57	69		9,1	2,2	2,7			2,6	5,7		
		1"					254				10,0					2,8	6,2		
ES8N	Screwed Rc, NPT	½"	1,6	230			130	73	90	100	5,1	2,9	3,5	3,9	Ductile Cast Iron FCD450	3,7	8,2		
		¾"					135				5,3					3,9	8,6		
		1"					175	73	90		6,9	2,9	3,5	3,9	Ductile Cast Iron FCD450	5,3	11,7		
ES8NF	Flanged JIS, ASME, DIN	½"	1,6	230			195	68	95	100	7,7	2,7	3,7		Ductile Cast Iron FCD450	5,7	12,5		
		¾"					215				8,5					6,8	15,0		
		1"					203				8,0					9,3	20,5		
ES10	Screwed Rc, NPT	¾" - 1½"	1,6	230			190	102	134	120	7,5	4,0	5,3	4,7	Cast Iron FC250	12,7	28,0		
		½" - 1"					254	102	134		10,0	4,0	5,3			14,2	31,2		
		1¼" - 2"					260				10,2					13,5	29,7		
ES10F	Flanged JIS, ASME, DIN	½" - 1"	1,6	230			270	140	140	120	10,6	5,5	5,5	4,7	Cast Iron FC250	15,1	33,2		
		1½" - 2"					280	150	130		11,0	5,9	5,1						
ES12N		½" - 1"	1,6	230			280												
		1½" - 2"					280												

ESH

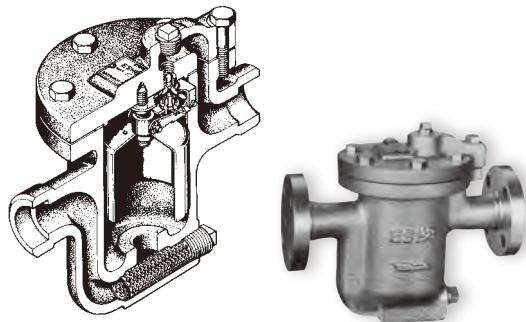


Dimensions


ESH8N, ESH8NW

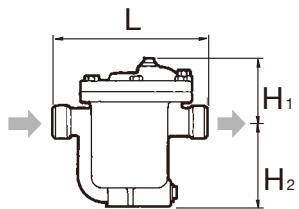


ESH8NF

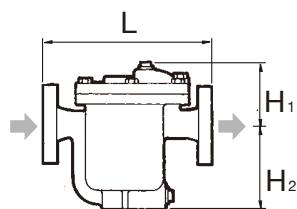

ESH21W

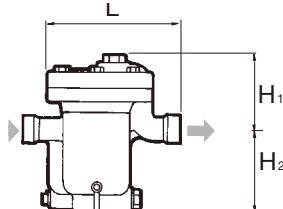


ESH21F

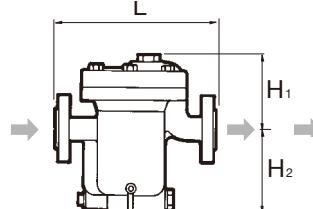

All models

Screwed, Socket Weld



Flanged


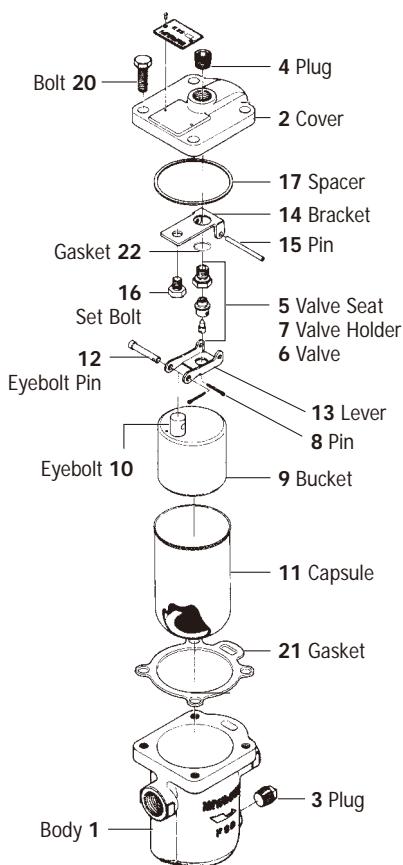
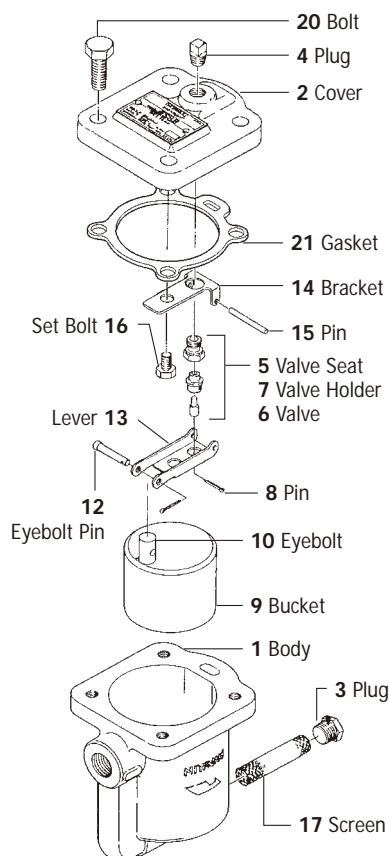
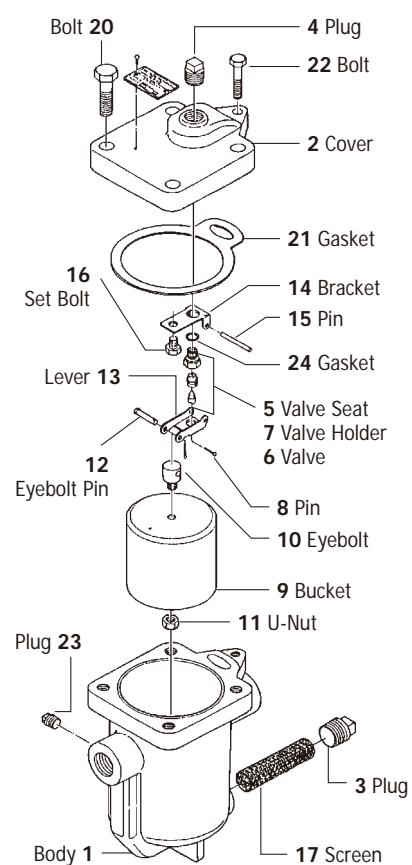
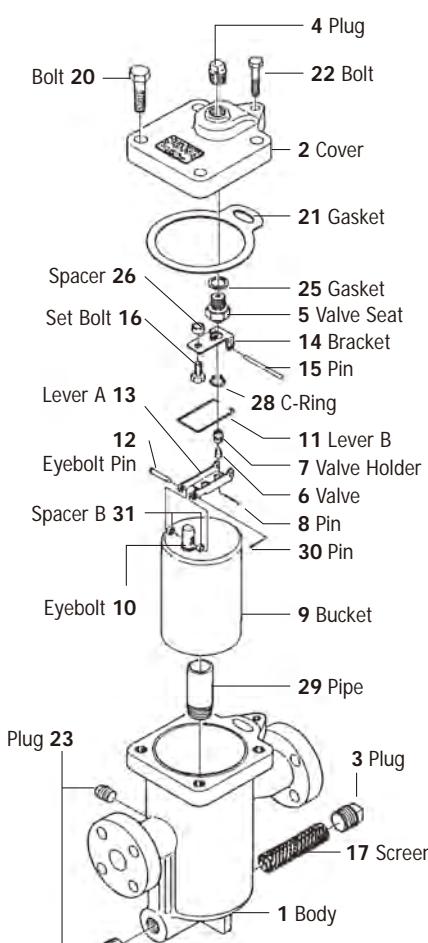
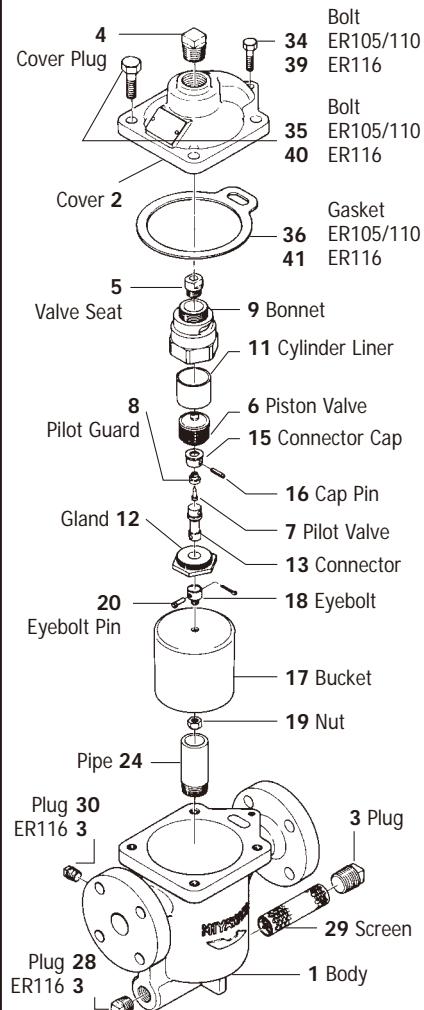
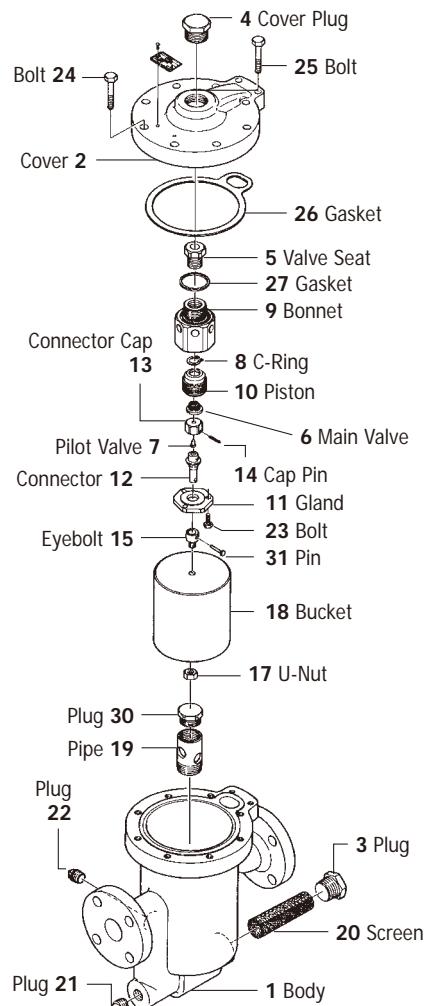


Table 1: weights


Size	Weight (kg)								Weight (lb)											
	JIS (FF, RF)		JIS (RF)		ASME/JPI (RF)		DIN		JIS (FF, RF)		JIS (RF)		ASME/JPI (RF)		DIN					
	10K	16K	20K	30K	40K	150lb	300lb	600lb	PN40	PN100	10K	16K	20K	30K	40K	150lb	300lb	600lb	PN40	PN100
1/2 "	11.0	11.0	12.4	12.8	11.4	12.1	12.1	11.3	12.2	24.2	24.2	27.3	28.2	25.1	26.6	26.6	24.9	26.9		
3/4 "	12.4	12.4	13.7	14.0	11.8	12.8	13.2	12.9	15.0	27.3	27.3	30.1	30.8	26.0	28.2	29.0	28.4	33.0		
1 "	13.2	13.6	14.6	15.0	12.4	13.6	14.0	15.0	18.3	29.0	29.9	32.1	33.0	27.3	29.9	30.8	33.0	40.3		

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight				
			MPa	psig	°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W	kg	lb		
ESH8N - 45	Screwed Rc, NPT	1/2" - 1"	2,1	305			400	752	114	111	146	1/2" - 3/4" = 220 1" = 224	9.8	4.5	4.4	5.7	11,0	24.2
			4,4	640														
ESH8NF - 45	Flanged JIS, ASME, DIN	1/2" - 1"	2,1	305			400	752	114	111	146	9.8	4.5	4.4	5.7	Table 1	Table 1	
			4,4	640														
ESH8NW - 45	Socket Weld JIS, ASME, DIN	1/2" - 1"	2,1	305			400	752	114	111	146	8.7	4.5	4.4	5.7	Cast Steel SCPH2	11,0	24.2
			4,4	640														
ESH21F - 45	Flanged JIS, ASME, DIN	1/2" - 1"	2,1	305			400	752	145	160	205	13.8	5.7	6.3	8.1		31,0	68.2
			4,4	640														
ESH21W - 45	Socket Weld JIS, ASME, DIN	1/2" - 1"	2,1	305			400	752	145	160	205	11.8	5.7	6.3	8.1		28,0	61.6
			4,4	640														


Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

SERIES E Spare Parts**ES5/ESU5****ES8N****ES10****ES12N****ER105/110/116****ER120**


ESH8N

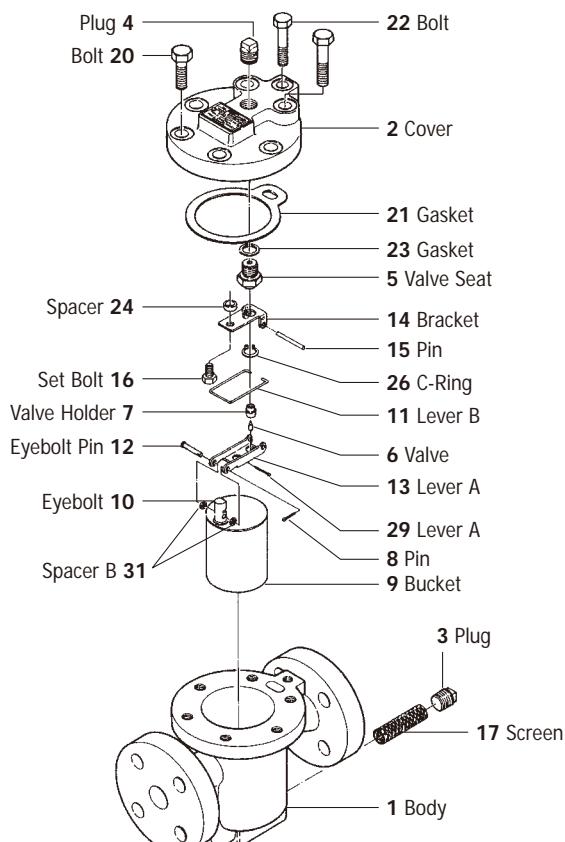


ESH21

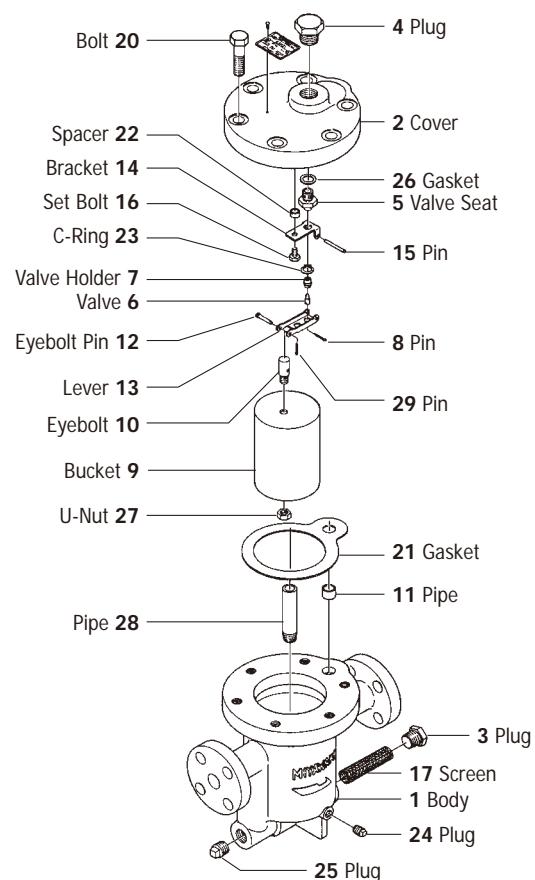

ER25

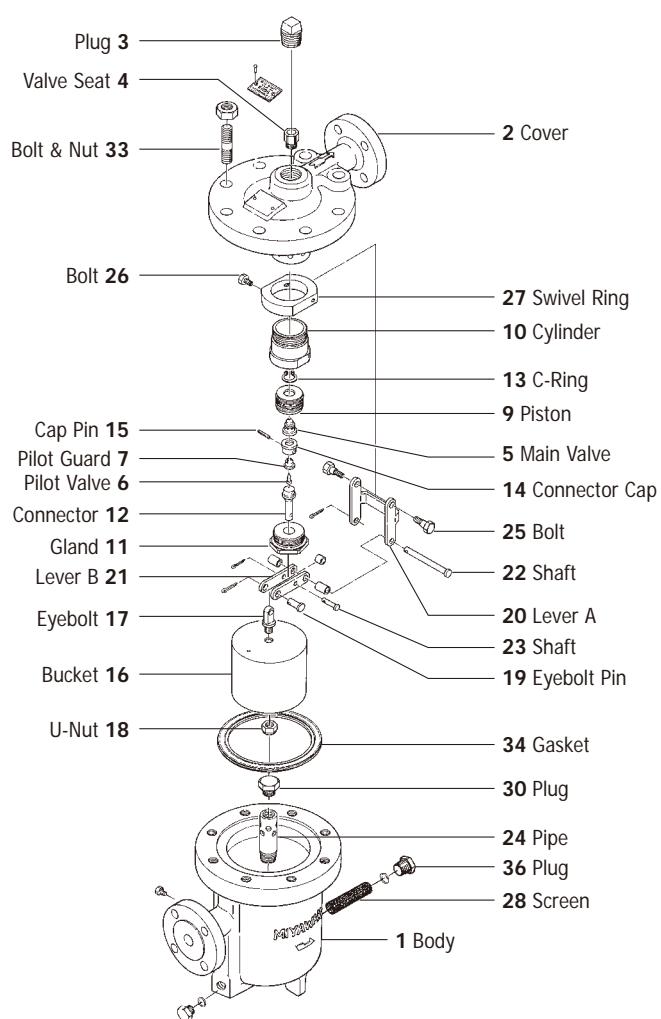

MEMO

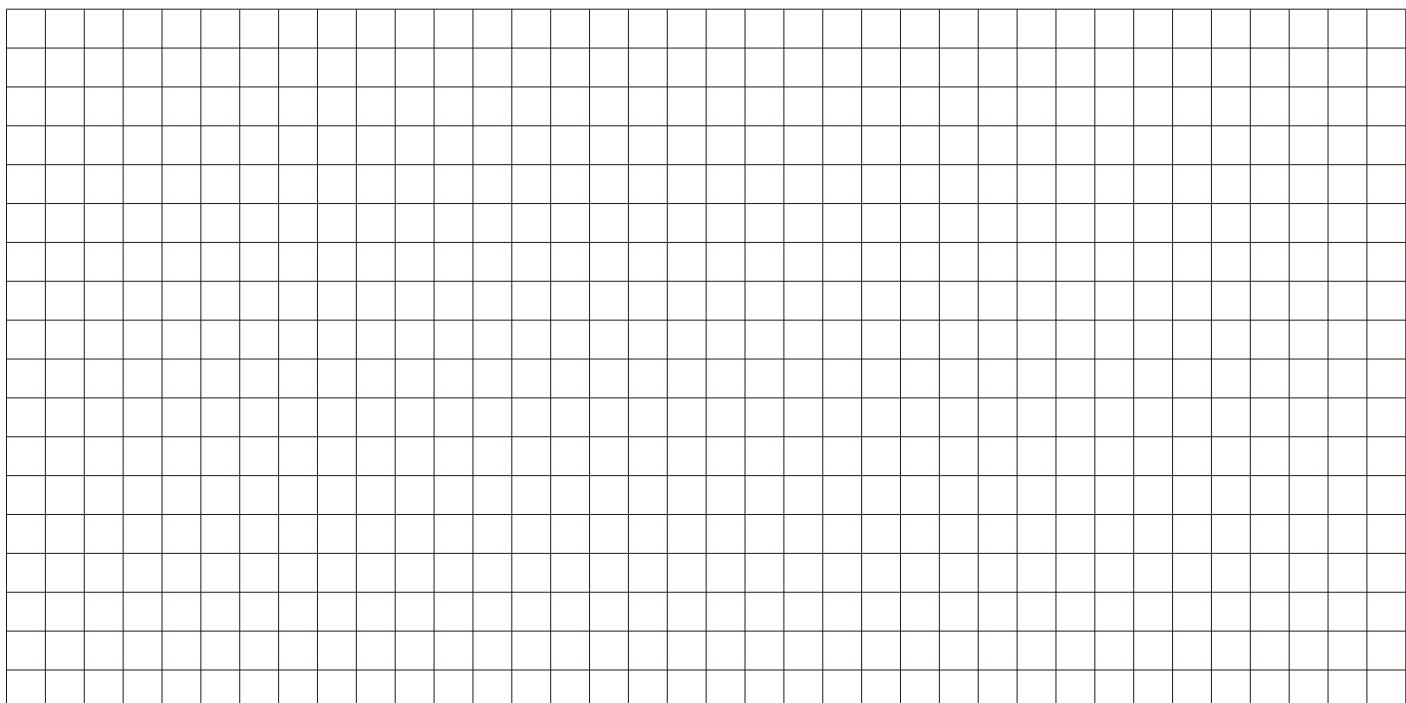

Ball Float Steam Traps

SERIES G

Ball Float Steam Traps belong to the family of mechanical traps. They operate on the difference in density between steam and water. A ball float is connected with a lever to the valve and seat or it is floating freely inside the valve body. Condensate will be discharged once it reaches a certain level inside the trap. Condensate is discharged continuously.

Models	G11N, G12N	Cast Iron Steam Traps for small and medium condensate loads
	G15N	Cast Iron Steam Trap for low pressure and large condensate loads
	G3N, G5	Ductile Cast Iron Steam Traps for large condensate loads
	G2-G8	Cast Iron Steam Traps for large condensate loads
	G20N, G30	Ductile Cast Iron Steam Trap for medium condensate loads
	GH3N, GH5, GH2-GH8, GH50, GH60, GH70	Cast Steel Steam Traps for large condensate loads
	GH40, GTH12	Cast Steel Steam Traps for medium condensate loads
	GC1, GC1V	Stainless Steel Steam Traps for small condensate loads
	GC20	Stainless Steel Steam Trap for medium condensate loads

Features

- All traps are equipped with stainless steel wear and corrosion resistant float, lever, valve and seat systems for a long and problem free operation.
- Each ball float steam trap is equipped with an air vent for venting air and gases at the time of start-up and during operation.
- The large capacity steam traps like G2-G8,GH2-GH8 use a double ported balance valve system, which is small in its physical size compared with the very high capacity of the traps.
- All traps are designed for quick and easy maintenance.


Application

Ball Float Steam Traps can be used in all process applications, like all kind of heat exchangers, tank and unit heaters and others, where condensate must be removed immediately after it forms.


The type GC1 is especially designed for applications in the food, pharmaceutical and other industries with small condensate loads and the need for stainless steel bodies. It can be also installed for drainage of steam main lines.

Operating principle


■ cold condensate ■ steam / hot air ■ hot condensate

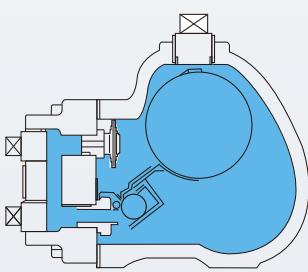

1

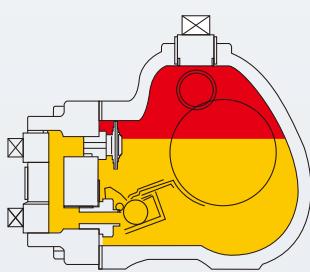

2

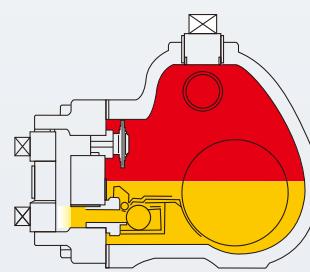


3



On start-up air is quickly discharged through the thermo-static air vent (membrane or bimetal type). Cold condensate fills the steam trap body. As soon as a certain water level is reached, the float rises and opens the valve. The cold condensate is discharged through the open valve and the open air vent.

When the condensate reaches saturation temperature, the air vent closes and condensate is discharged only through the main valve orifice. The condensate forms a water seal inside the trap body, which prevents live steam loss at all times.


The opening degree of the valve is regulated by the water level inside the trap body. Condensate is discharged continuously. As long as air enters the trap and accumulates at the top of the trap body, the temperature cools down a little bit and the air vent, which opens slightly below saturation temperature, begins to discharge the air from the trap.

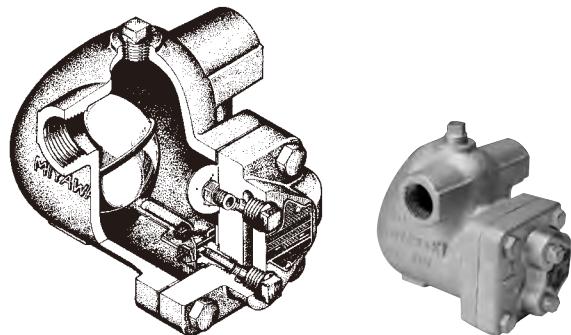SERIES G Ball Float Trap**G11N, G12N**


Capacity Chart G11N, G12N

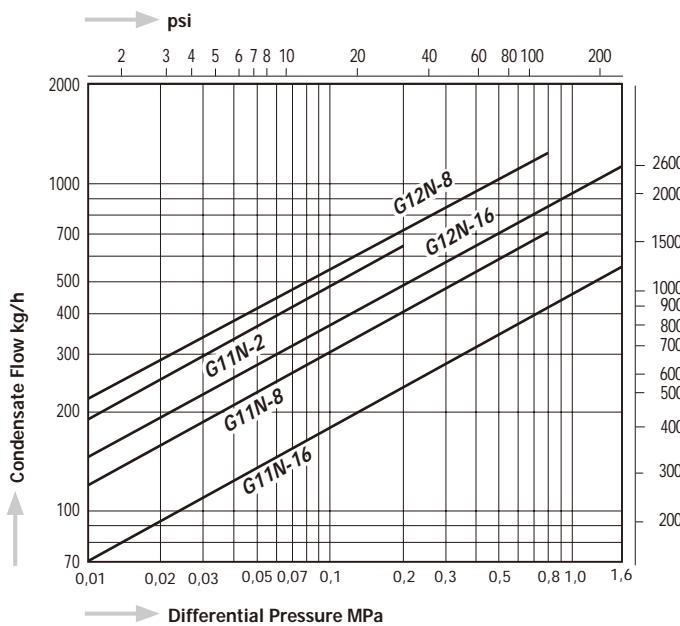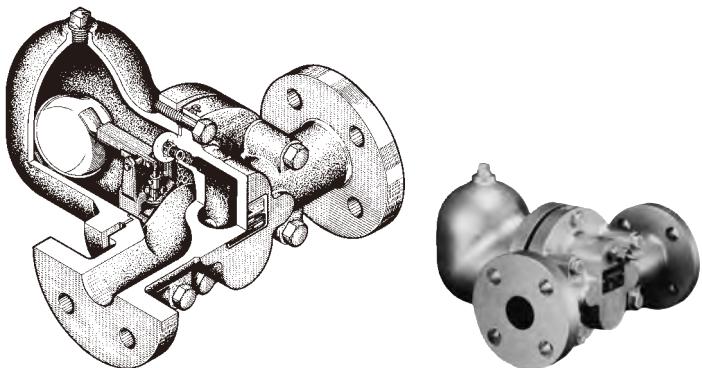**G15N**


Capacity Chart G15N

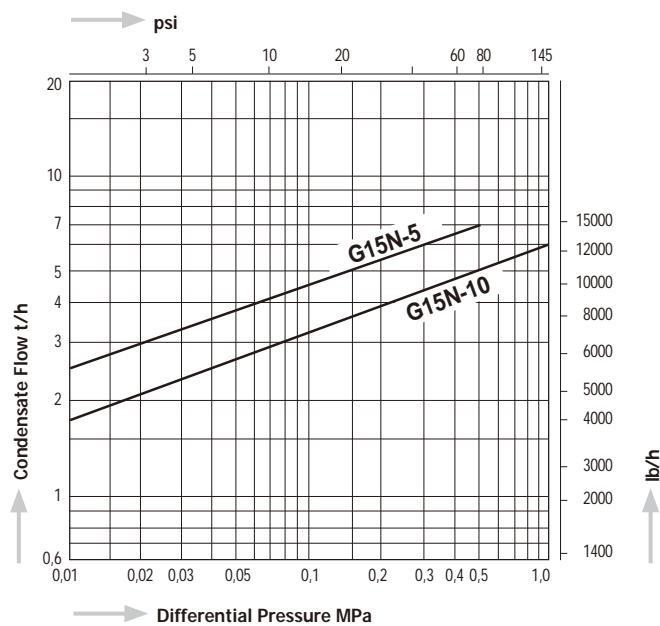

Dimensions G11N, G12N

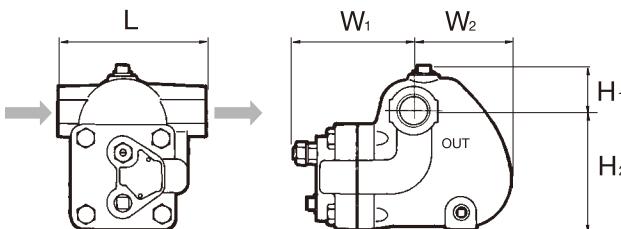

G15N

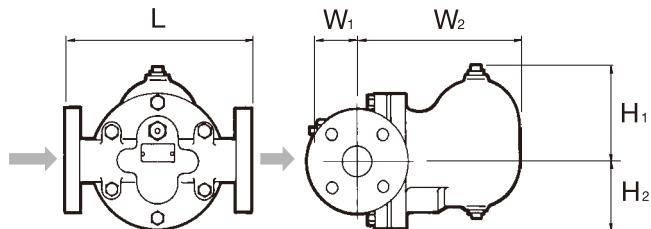

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	W1	W2	L	H1	H2	W1	W2	kg	lb	
G11N - 8	Screwed Rc, NPT	1/2", 3/4"	0,2	29	220	428	120	37	92	97	60	4.7	1.5	3.6	3.8	2.4	Cast Iron FC250	3,9	8.6
			0,8	116															
			1,6	230															
G12N - 8	Screwed Rc, NPT	3/4", 1"	0,8	116	220	428	140	47	113	102	92	5.5	1.9	4.4	4.0	3.6			
			1,6	230															
G15N - 5	Flanged JIS, ASME, DIN	1 1/4" - 2"	0,5	73	220	428	300	130	90	30	230	11.8	5.1	3.5	1.2	9.1	Cast Iron FC250	6,0	13.2
			1,0	145															
For G11N and G12N, flanged connection is available as special design. Please contact MIYAWAKI Inc. or an authorized representative.																			

G20N

Screwed




Flanged Connection

GC20



Screwed



Flanged Connection


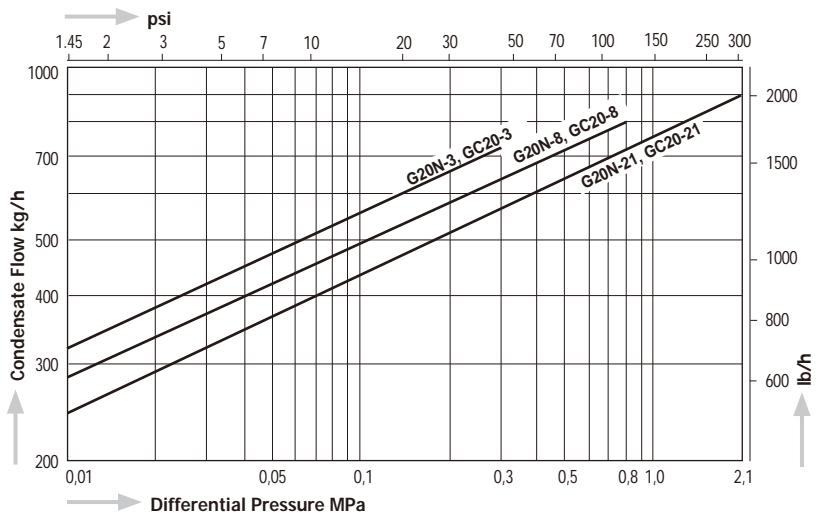
Capacity Chart G20N / GC20**Available versions G20N / GC20****Max. Operating Pressure:**

G20N (GC20)- 3	0,3 MPa (43 psig)
G20N (GC20)- 8	0,8 MPa (116 psig)
G20N (GC20)- 21	2,1 MPa (305 psig)

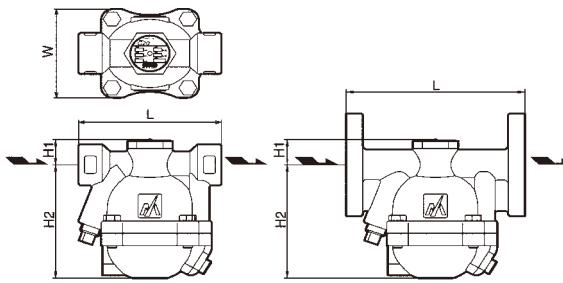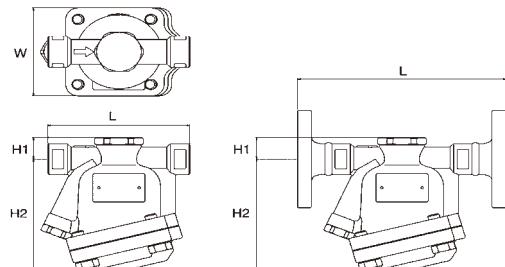Dimensions G20N**Dimensions GC20**

Model	Connections	Size	Max. Operating Pressure, PMO		Max. Operating Temperature, TMO		Dimensions (mm)			Dimensions (in)			Body Material	Weight			
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb	
G20N	Screwed Rc, NPT	1/2"					120	24	105	82	4.7	1.0	4.1	3.2	Ductile Cast Iron FCD450	2,5	5.5
		3/4"							107							2,6	5.7
		1"														3,8*	8,4*
G20NF	Flanged JIS, ASME	1/2"	2,1	305	220	428	150*	24	105	82	5.9	1.0	4.1	3.2	Ductile Cast Iron FCD450	4,2*	9,2*
		3/4"					160*				6.3					5,3*	11,7*
		1"					150	24	105	82	5.9	1.0	4.1	3.2		3,7	8,1
	Flanged DIN	DN15														4,2	9,2
		DN20					160				6.3					4,8	10,6
GC20	Screwed Rc, NPT	1/2"					120	21	113	86	4.7	0.8	4.4	3.4	Stainless Steel SCS13A	2,4	5.3
		3/4"														2,5	5,5
		1"					175				6.9					3,9*	8,6*
GC20F	Flanged JIS, ASME	1/2"	2,1	305	220	428	195	21	113	86	7.7	0.8	4.4	3.4	Stainless Steel SCS13A	5,0*	11,0*
		3/4"					215				8.5					5,8*	12,8*
		1"					150	21	113	86	5.9	0.8	4.4	3.4		3,4	7,5
	Flanged DIN	DN15														3,9	8,6
		DN20					160				6.3					4,6	10,1


*Depending on the flange rating, the weight and length may differ.

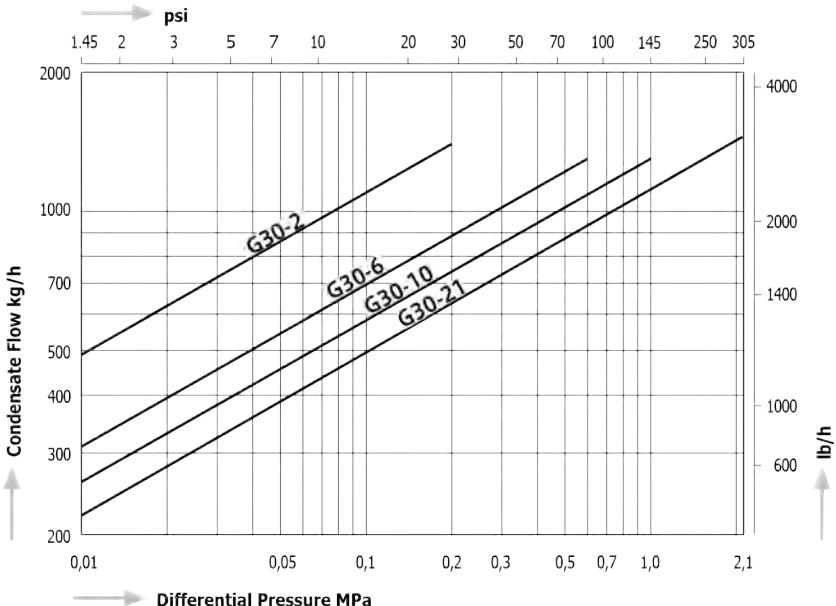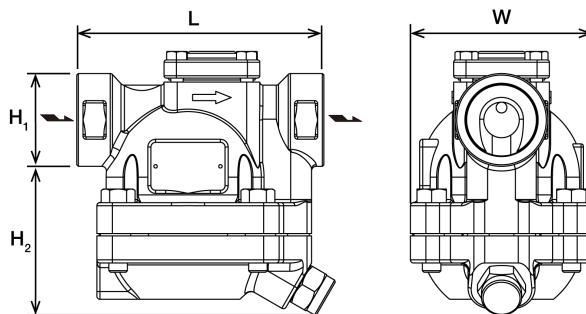SERIES G Ball Float Trap**G30****Capacity Chart****Dimensions**


Connections	Size	Dimensions (mm)				Dimensions (in)				Weight	
		L	H1	H2	W	L	H1	H2	W	kg	lb
Rc	1"	155	44	125	118	6.1	1.7	4.9	4.6	6.5	14.3
	1-1/4"	160				6.3				6.5	14.3
	1-1/2"									6.3	13.9
NPT	1"	160	44	125	118	6.3	1.7	4.9	4.6	6.6	14.5
	1-1/4"	165				6.5				6.5	14.3
	1-1/2"									6.3	13.9

Model	Max. Allowable Pressure (PMA)		Max. Allowable Temperature (TMA)		Max. Operating Pressure (PMO)		Max. Operating Temperature (TMO)		Body Material
	MPa	psig	°C	°F	MPa	psig	°C	°F	
G30-2	2.1	305	250	482	0.2	29	235	455	Ductile Cast Iron FCD450
G30-6					0.6	87			
G30-10					1	145			
G30-21					2.1	305			

G2, G4, G6, G8 GH2, GH4, GH6, GH8

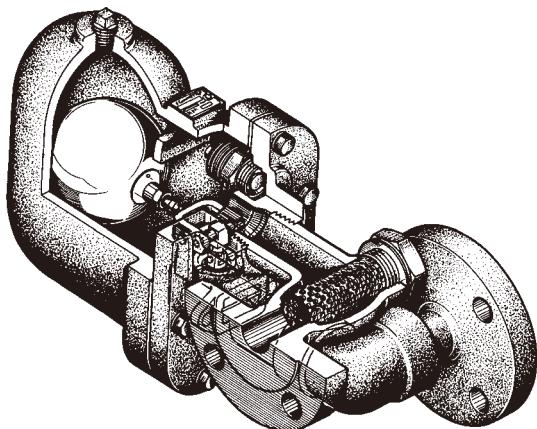


Capacity Chart

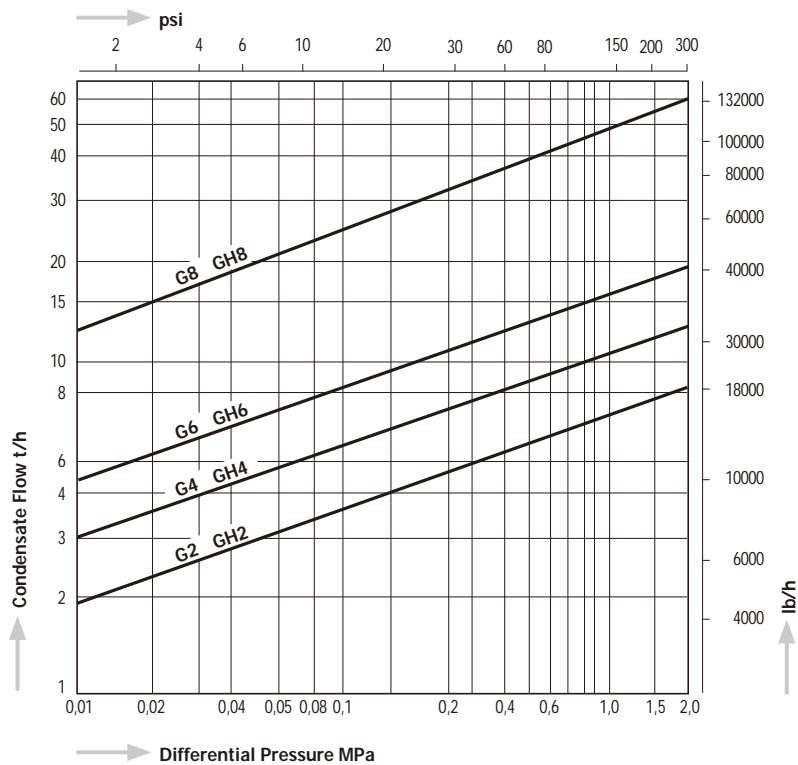


Dimensions

G2 / GH2

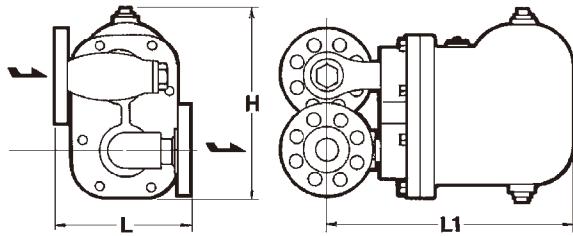


G4, G6, G8 / GH4, GH6, GH8

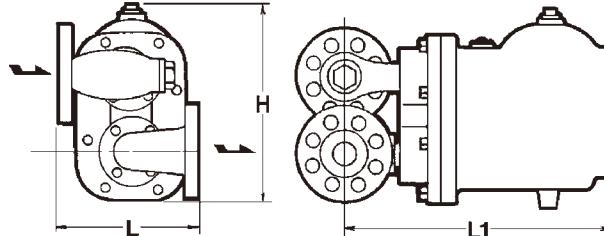


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material	Weight	
			MPa	psig	°C	°F	L	L1	H	L	L1	H		kg	lb
G2	Flanged JIS, ASME, DIN	1"	1,6	230	220	428	175	310	250	6.9	12.2	9.8	Cast Iron FC250	21 38 62 147	46.2 83.6 136.4 323.4
		1 1/4"					180			7.1					
		1 1/2" - 2"					190			7.5					
G4		1 1/4" - 2"					200	380	320	7.9	14.9	12.6			
G6		1 1/2" - 3"					270	410	350	10.6	16.1	13.8			
G8		3" - 4"					350	570	480	13.8	22.4	19.9			
GH2	Flanged JIS, ASME, DIN	1" - 1 1/2"	2,0	290	400	752	200	310	235	7.9	12.2	9.1	Cast Steel SCPH2	24 43 68 162	52.8 94.6 149.6 356.4
		2"					210			8.3					
		1 1/4" - 2"					200	380	320	7.9	14.9	12.6			
		1 1/2" - 3"					270	415	345	10.6	16.3	13.6			
		3" - 4"					350	590	470	13.8	23.2	18.5			

G3N, G5 GH3N, GH5

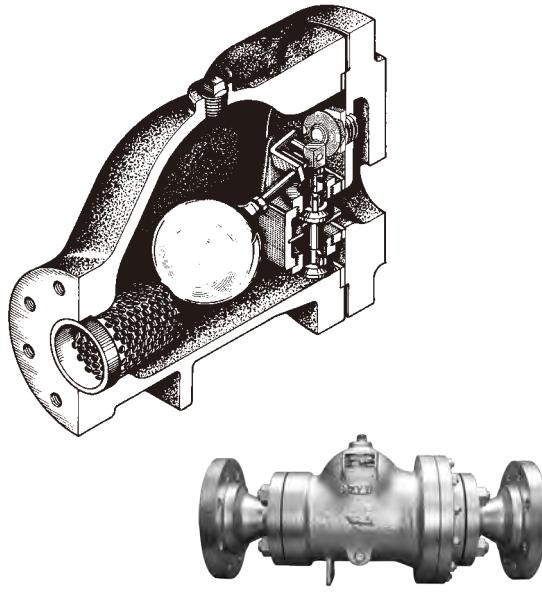

Dimensions G3N-R, G5-R, GH3N-R, GH5-R

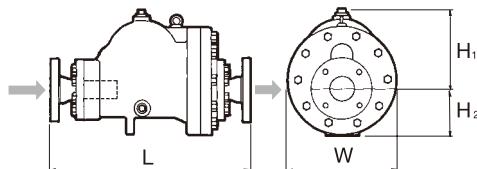

Capacity Chart

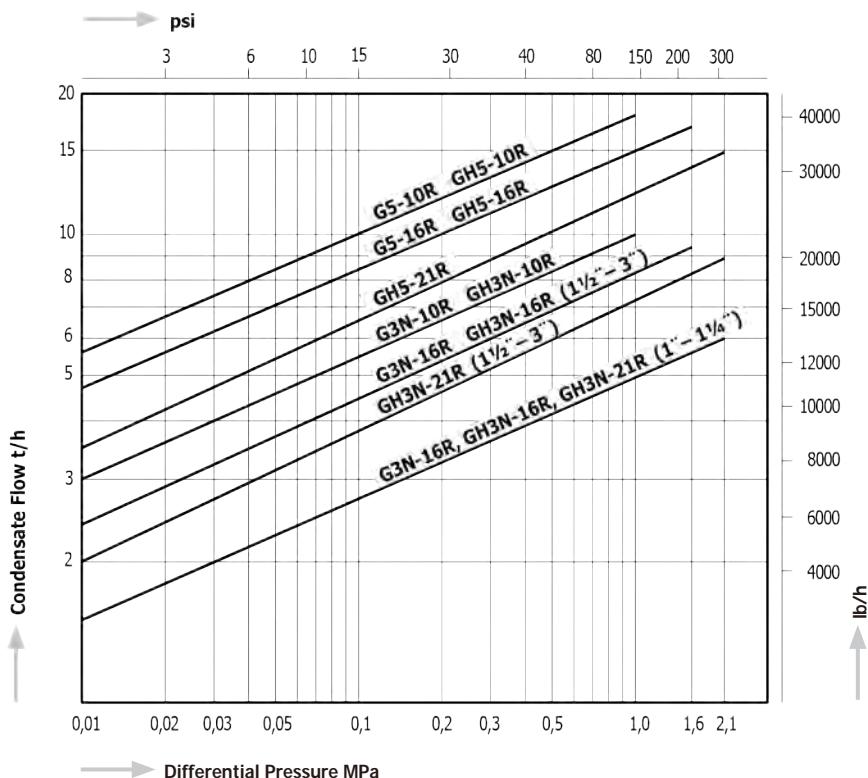


Table 1: Dimensions (ASME and DIN)

Model	Flange Standards		Size		L (mm)	L (in)
G3N-R	DIN PN16	ASME 150 lb / 300 lb RF	DN25 - DN40	1" - 1½"	437	17.2
			DN50	2"	467	18.4
			DN60, DN80	2½", 3"	497	19.6
GH3N-R	DIN PN40	ASME 150 lb / 300 lb RF	DN25, DN32	1", 1¼"	457	18.0
			DN40	1½"	477	18.8
			DN50	2"	487	19.2
			DN65, DN80	2½", 3"	517	20.4


Model	Flange Standards			Size		L (mm)	L (in)
G5-R	DIN PN16	ASME 150 lb / 300 lb RF	DN50	2"	540	21.3	
			DN65, DN80	2½", 3"	570	22.4	
			DN100	4"	600	23.6	
GH5-R	DIN PN40	ASME 150 lb / 300 lb RF	DN50	2"	550	21.7	
			DN65, DN80	2½", 3"	580	22.8	
			DN100	4"	620	24.4	

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature	Dimensions (mm)			Dimensions (in)			Body Material	Weight				
			MPa	psig		°C	°F	L	H1	H2	W		kg	lb			
G3N - 10R	Flanged JIS, ASME, DIN	1½" - 3"	1,0	145	235	455	Table 1 (*)	140	95	198	5.5	3.7	7.8	Ductile Cast Iron FCD 450	28 - 31 (*2)	62 - 68 (*2)	
16R		1" - 3"	1,6	230				205	110	270	8.1	4.3	10.6		52 - 69 (*2)	114 - 152 (*2)	
G5 - 10R		2" - 4"	1,0	145				139	106	212	5.5	4.2	8.3	Cast Steel SCPH2	38 - 50 (*2)	84 - 110 (*2)	
16R		2" - 4"	1,6	230				200	115	270	7.9	4.5	10.6		63 - 80 (*2)	139 - 176 (*2)	
GH3N - 10R		1½" - 3"	1,0	145				139	106	212	5.5	4.2	8.3				
16R		1" - 3"	1,6	230				200	115	270	7.9	4.5	10.6				
GH3N - 21R		1" - 3"	2,1	305				139	106	212	5.5	4.2	8.3				
21R		2" - 4"	1,0	145				200	115	270	7.9	4.5	10.6				
GH5 - 10R		2" - 4"	1,6	230				139	106	212	5.5	4.2	8.3				
16R		2" - 4"	2,1	305				200	115	270	7.9	4.5	10.6				
GH5 - 21R		2" - 4"	2,1	305				139	106	212	5.5	4.2	8.3				


(*1) Please look at our technical drawings for JIS dimensions.

(*2) Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

Stainless Steel as body material for GH3N and GH5 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

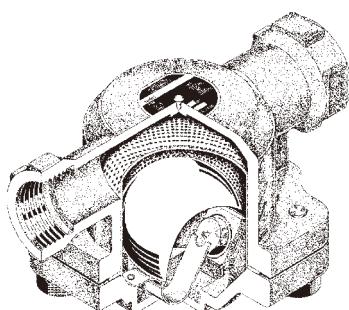GC1


Horizontal installation

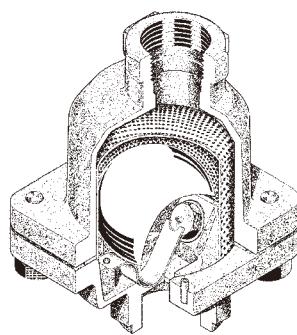**GC1V**

Vertical installation




Dimensions

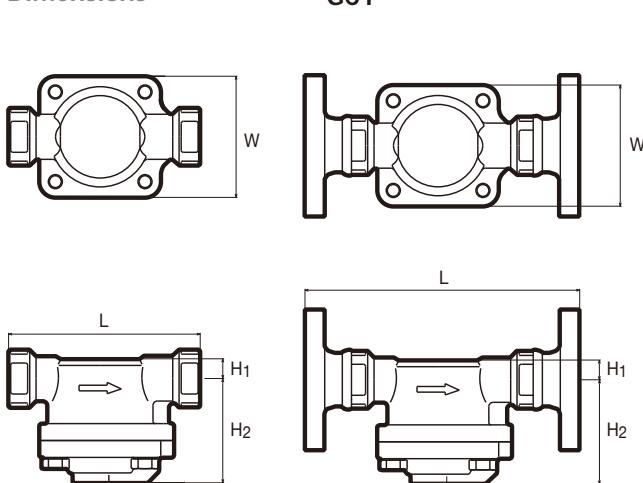


GC1

Capacity Chart GC1 / GC1V

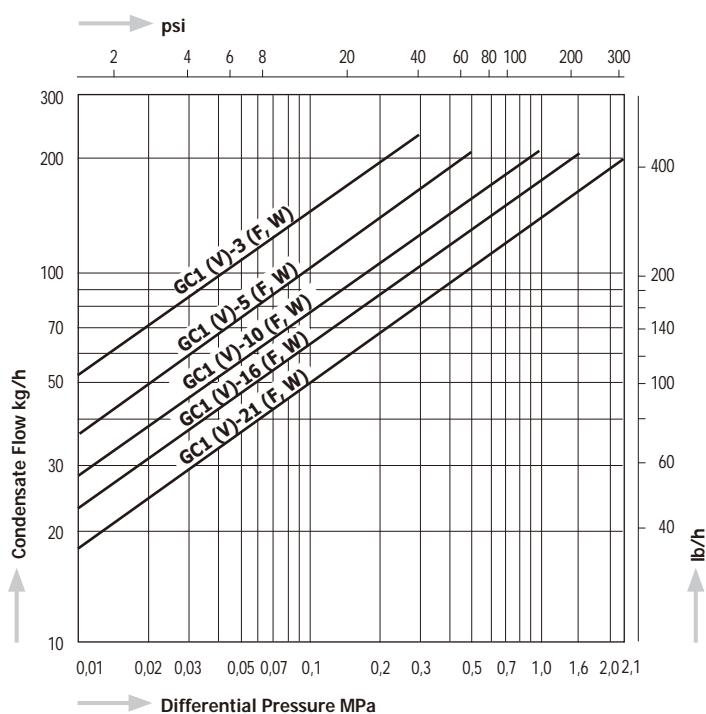








GC1V

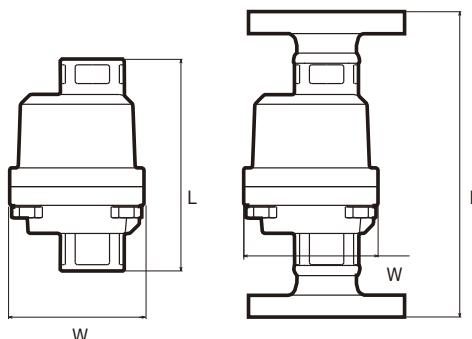

Available pressure ranges GC1/GC1V

Model	Max. Operating Pressure	
	MPa	psig
GC1 / GC1V - 21	2,1	305
GC1 / GC1V - 16	1,6	230
GC1 / GC1V - 10	1,0	145
GC1 / GC1V - 5	0,5	72,5
GC1 / GC1V - 3	0,3	43,5

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight						
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb					
GC1 (GC1V)	Screwed Rc, NPT	1/2"	2,1	305	350	662	127	15	75	86	5.0	0.6	3.0	3.4								
		3/4"					136				5.4				1,8	4.0						
		1"					140				5.5				1,9	4.2						
GC1-W (GC1V-W)	Socket Weld JIS, ASME, DIN	1/2"	2,1	305	350	662	127	15	75	86	5.0	0.6	3.0	3.4								
		3/4"					136				5.4				2,0	4.4						
		1"					140				5.5				1,8	4.0						
GC1-F (GC1V-F)	Flanged JIS, ASME, DIN	1/2"	2,1	305	350	662	175	15	75	86	6.9	0.6	3.0	3.4								
		3/4"					195				7.7				1,9	4.2						
		1"					215				8.5				2,0	4.4						
																3,3	7.3					
																4,5	9.9					
																5,3	11.7					

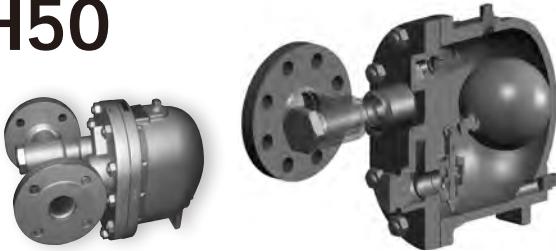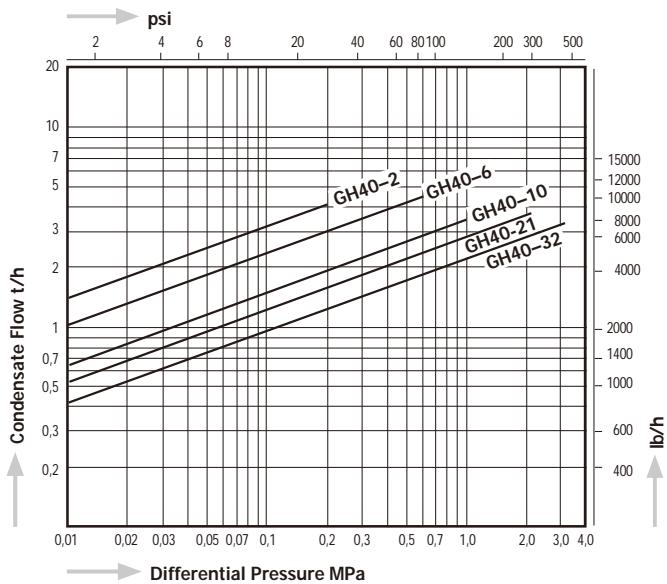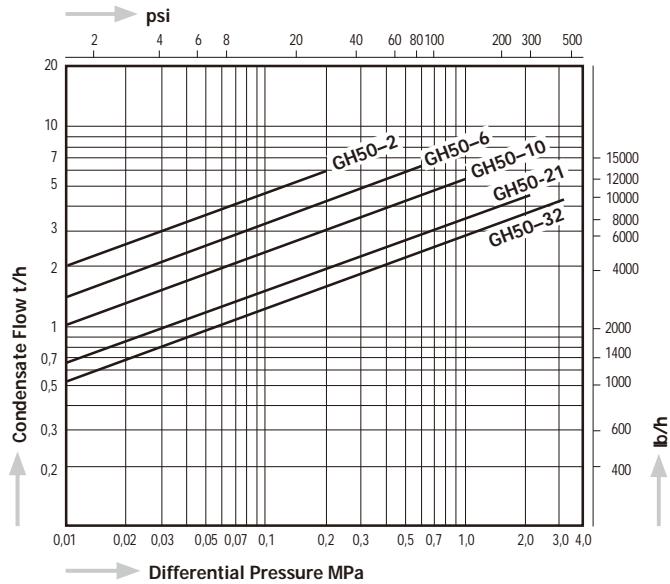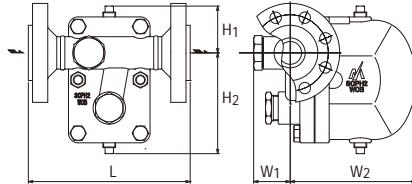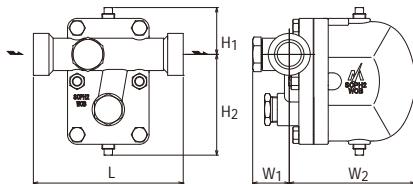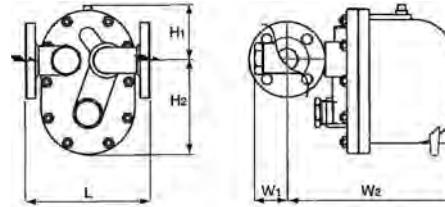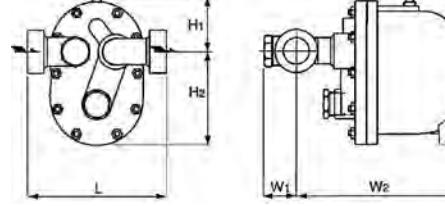SERIES G Ball Float Trap**GH40****GH50****Capacity Chart GH40****Capacity Chart GH50****Dimensions****GH40-F****GH40-W****GH50-F****GH50-W**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature, TMO		Dimensions (mm)					Dimensions (in)					Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W1	W2	L	H1	H2	W1	W2		kg	lb
GH40 - F	Flanged JIS, ASME, DIN	1½", 2"	3,2	464	400	752	230	80	170	60	210	9.1	3.15	6.7	2.4	8.3	Cast Steel SCPH2	24	53
GH40 - W	Socket Weld JIS, ASME, DIN	1½"					250	80	170	60	210	9.8	3.15	6.7	2.4	8.3		19	41.9
		2"					260					10.2						37	81.4
GH50 - F	Flanged JIS, ASME, DIN	1½", 2"					230	107	173	60	330	9.1	4.2	6.8	2.4	13.0		32	70.4
GH50 - W	Socket Weld JIS, ASME, DIN	1½"					250	107	173	60	330	9.8	4.2	6.8	2.4	13.0		32	70.4
		2"					260					10.2							

Available pressure ranges		Max. Operating Pressure (PMO)									
		MPa	psig	MPa	psig	MPa	psig	MPa	psig	MPa	psig
0,2	29	0,6	87	1,0	145	2,1	305	3,2	464		


Models		GH40-2F, GH40-2W GH50-2F, GH50-2W	GH40-6F, GH40-6W GH50-6F, GH50-6W	GH40-10F, GH40-10W GH50-10F, GH50-10W	GH40-21F, GH40-21W GH50-21F, GH50-21W	GH40-32F, GH40-32W GH50-32F, GH50-32W	

Depending on the flange standard the dimensions and the weight may differ.


Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

GH60**GH70**


Capacity Chart GH60

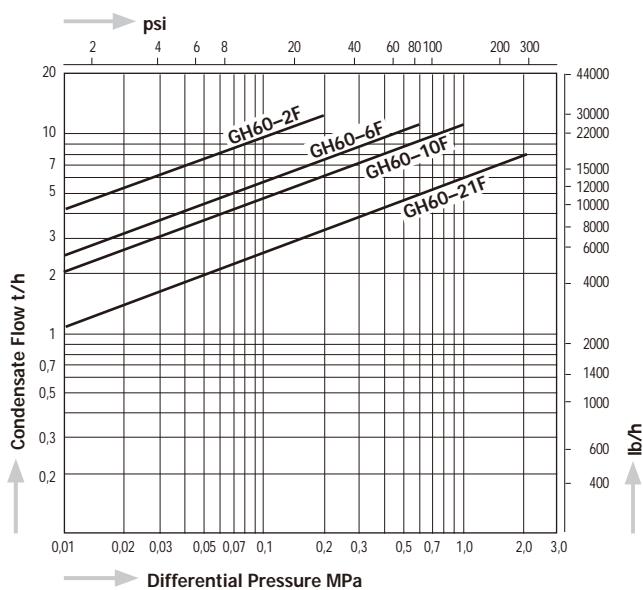


Capacity Chart GH70

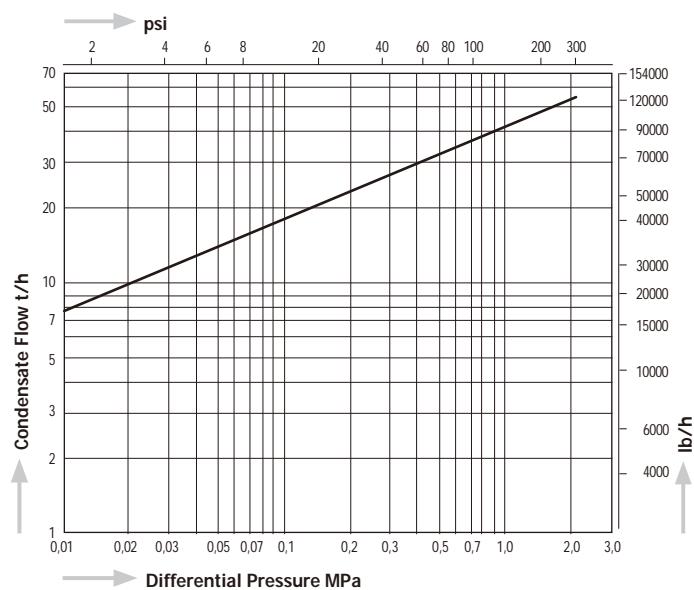

Dimensions GH60

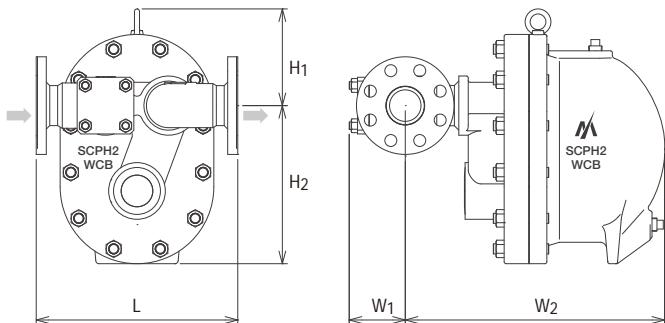

Dimensions GH70

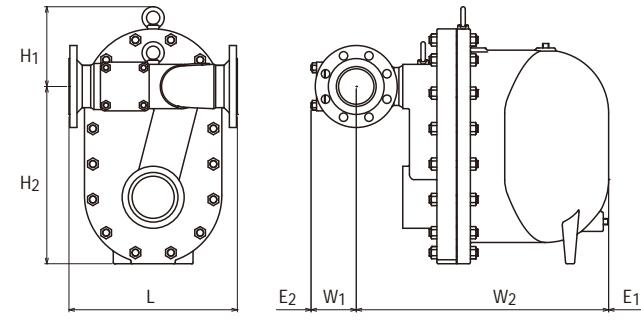


Model	Connect.	Size	Max. Operating Pressure		Max. Differential Pressure, PMX		Max. Operating Temperature, TMO		Dimensions (mm)						Dimensions (in)				Body Material	Weight			
			MPa	psig	MPa	psig	°C	°F	L	H1	H2	W1	W2	E1	E2	L	H1	H2	W1	W2	kg	lb	
GH60 -2F	Flanged JIS, ASME, DIN	2'' - 2½''	0,2	29	0,2	29	400	752	320	155	250	90	410			12.6	6.1	9.8	3.5	16.1	Cast Steel SCPH2	75	165
GH60 -6F			0,6	87	0,6	87																	
GH60 -10F			1,0	145	1,0	145																	
GH60 -21F			2,1	305	2,1	305																	
GH70 -21F	Flanged JIS, ASME, DIN	3''	2,1	305	2,1	305	400	752	380	180	400	105	570	330	120	15.0	7.1	15.7	4.1	22.4	Cast Steel SCPH2	160	352
		4''																					

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

GTH12





Capacity Chart GTH12

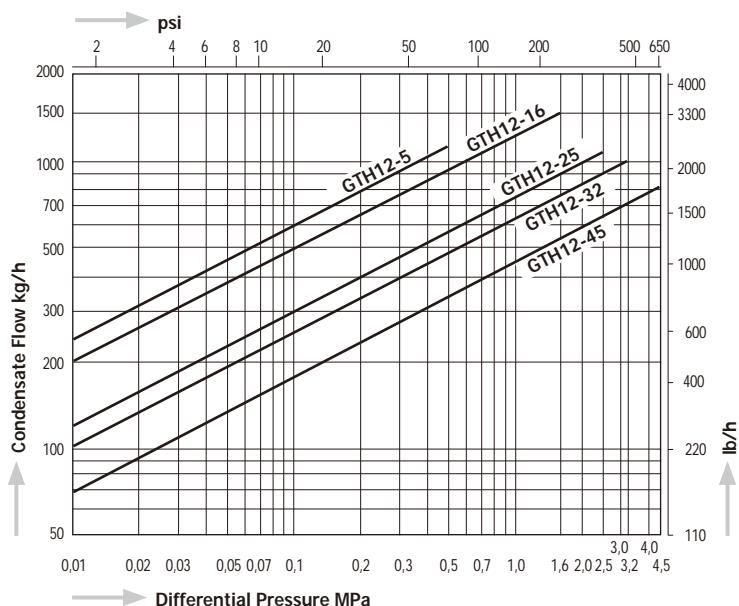

Dimensions

GTH12-F Flanged

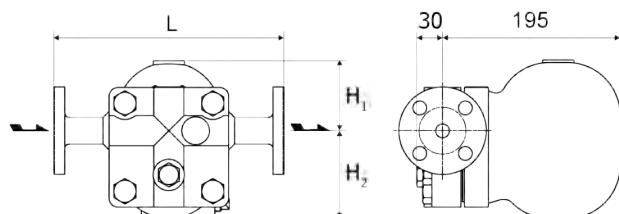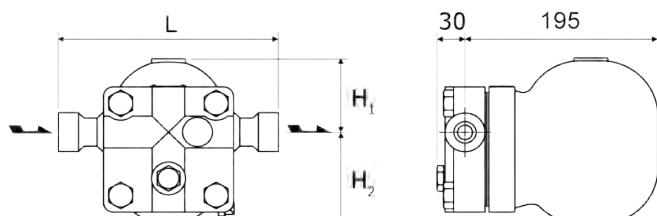GTH12 Screwed
GTH12-W Socket Weld


Model	Connections	Size	Max. Operating Pressure		Max. Differential Pressure, PMX		Max. Operating Temperature, TMO		Dimensions (mm)			Dimensions (in)			Body Material	Weight	
			MPa	psig	MPa	psig	°C	°F	L	H1	H2	L	H1	H2		kg	lb
GTH12- 5	Screwed Rc, NPT	1/2" - 1"	3,2 *	464 *	0,5	73	400 *	752 *	220	75	95	8.7	3.0	3.7	Cast Steel SCPH2	~11,7 ~25.8	
GTH12- 16					1,6	230											
GTH12- 25					2,5	363											
GTH12- 32					3,2	464											
GTH12- 45			5,0	725	4,5	652	425	800									
GTH12- 5F	Flanged JIS, ASME, DIN	1/2" - 1"	3,2 *	464 *	0,5	73	400 *	752 *	250	75	95	9.8	3.0	3.7	Cast Steel SCPH2	~15,2 ~33.5	
GTH12- 16F					1,6	230											
GTH12- 25F					2,5	360											
GTH12- 32F					3,2	464											
GTH12- 45F			5,0	725	4,5	652	425	800									
GTH12- 5W	Socket Weld JIS, ASME, DIN	1/2" - 1"	3,2 *	464 *	0,5	73	400 *	752 *	220	75	95	8.7	3.0	3.7	Cast Steel SCPH2	~11,7 ~25.8	
GTH12- 16W					1,6	230											
GTH12- 25W					2,5	360											
GTH12- 32W					3,2	464											
GTH12- 45W			5,0	725	4,5	652	425	800									

*PMO 5,0 MPa and TMO 425 °C is available as special design.


A vertical version and Stainless Steel as body material are available as special design.

For more details, please contact MIYAWAKI Inc. or an authorized representative.


G11N/G12N





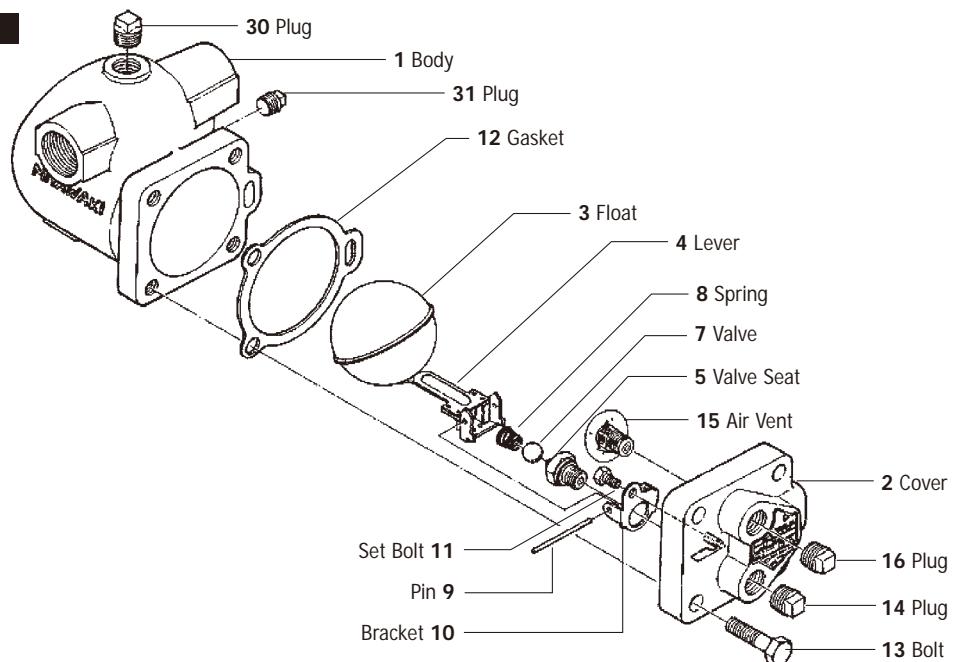


G15N

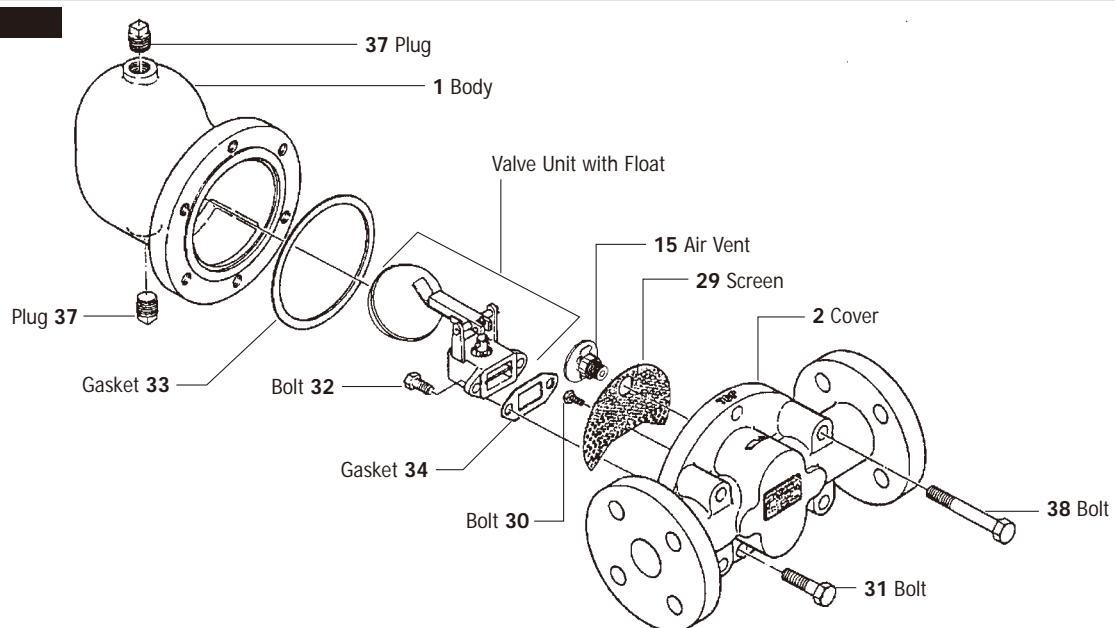

G3N, GH3N, G5, GH5

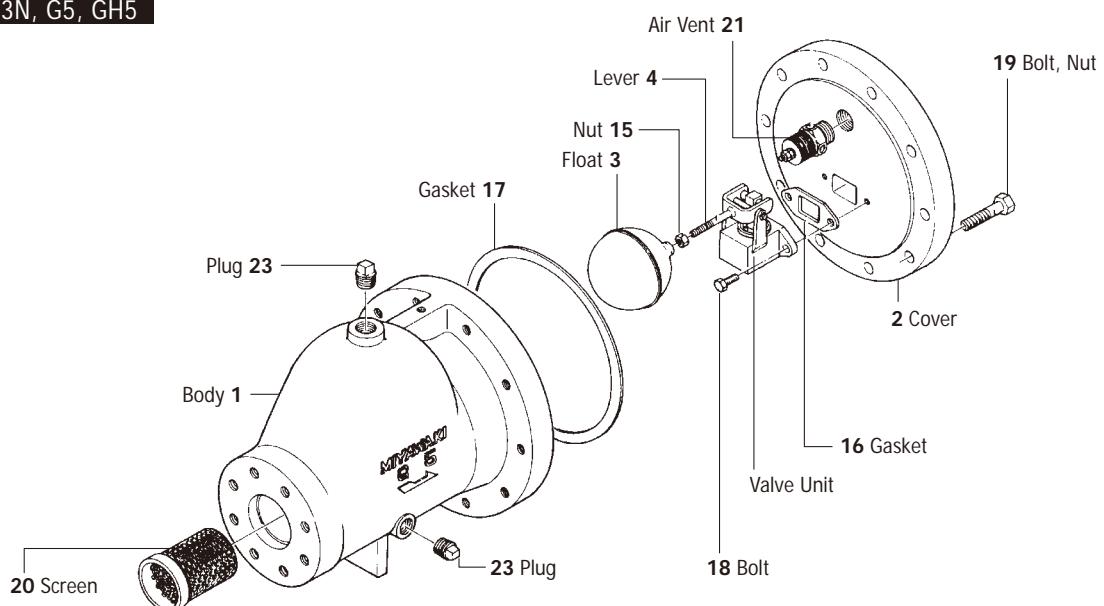


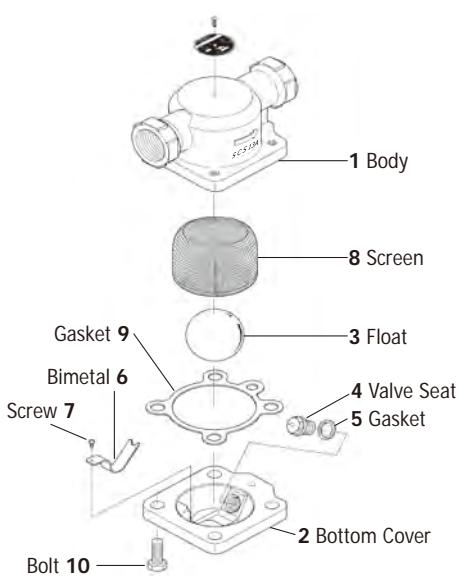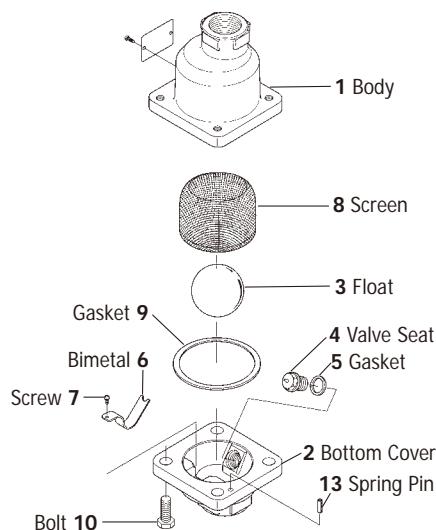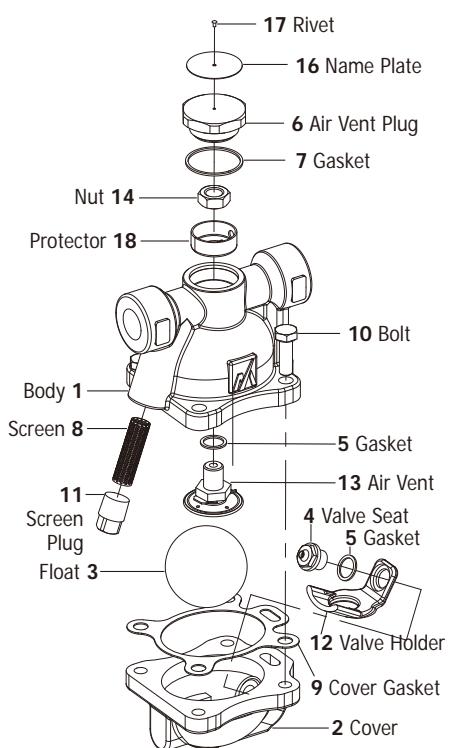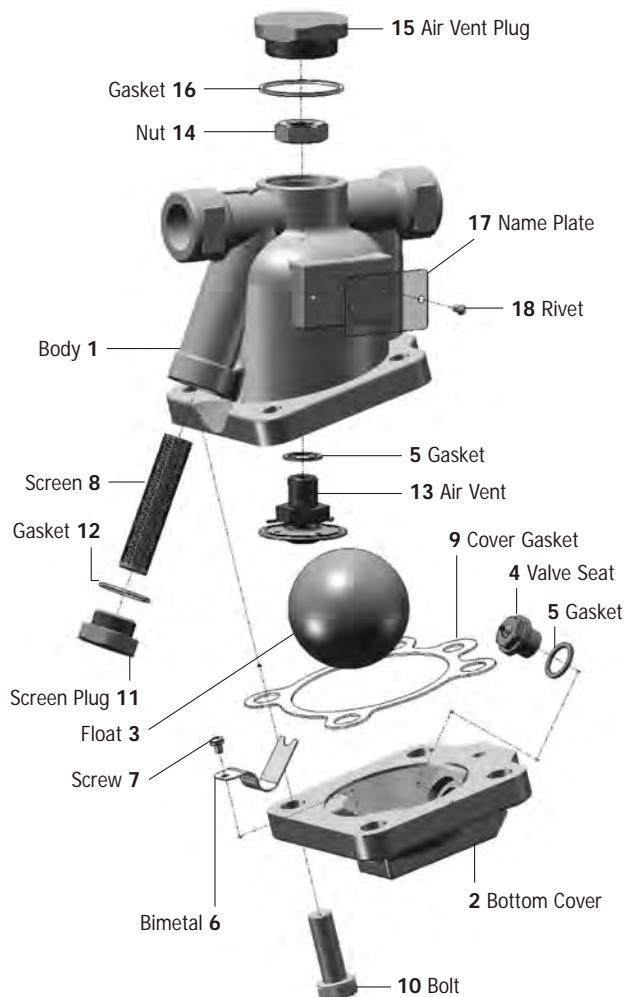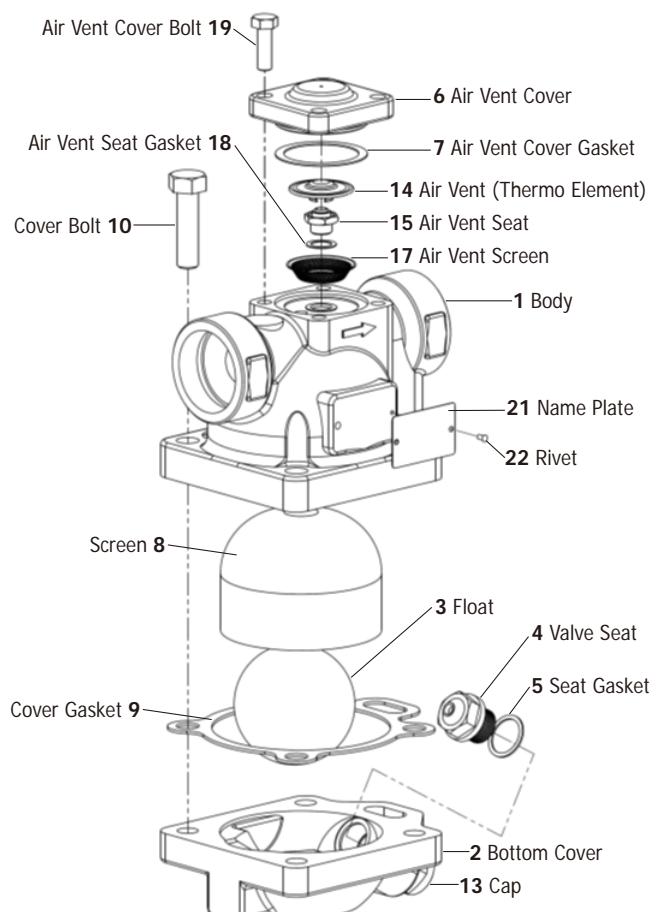SERIES G Spare Parts**GC1****GC1V****G20N****GC20****G30**


GH2

Valve Unit


- 5 Valve Seat
- 6 Valve
- 7 Holder
- 8 Lever Nut
- 9 Nut
- 10 Connector
- 11 Nut
- 12 Guide Wing
- 13 Pin
- 32 Baffle Plate
- 39 Pin
- 43 Shaft
- 44 Collar
- 45 Split Pin
- 47 Spring Pin

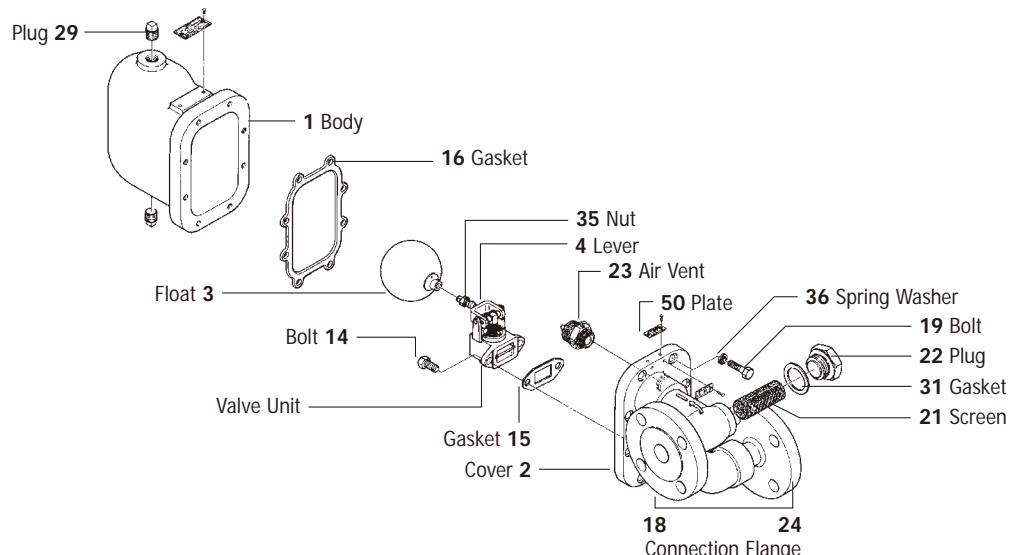


GH4, GH6, GH8

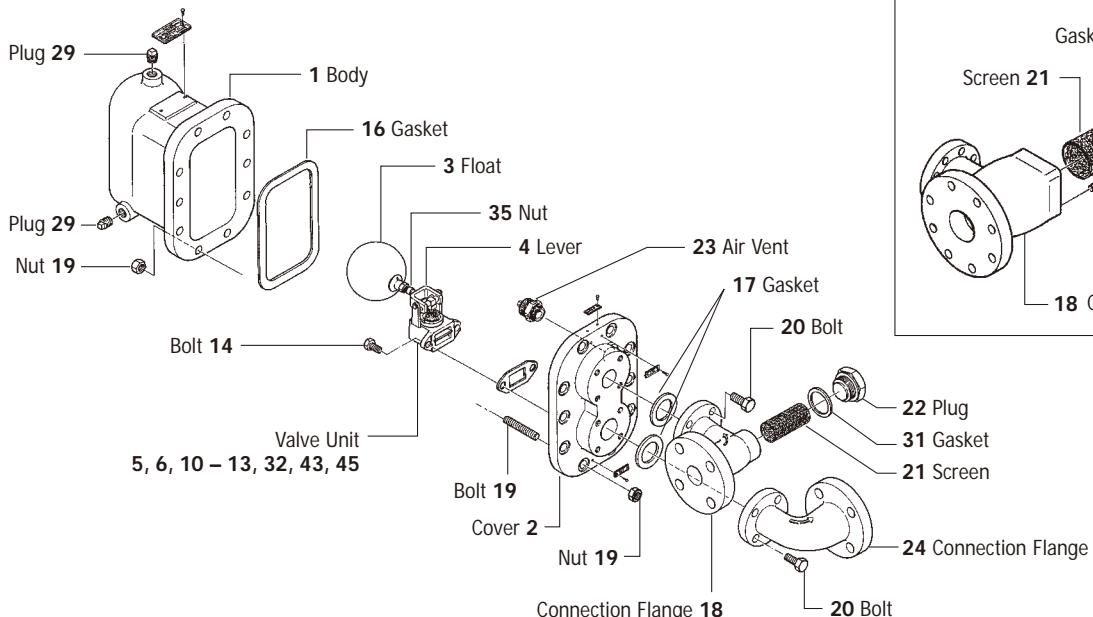


GH8 only



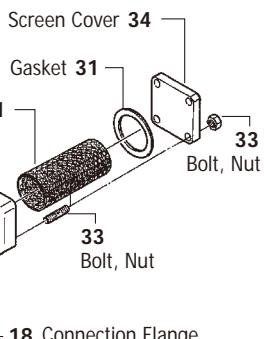


GH40

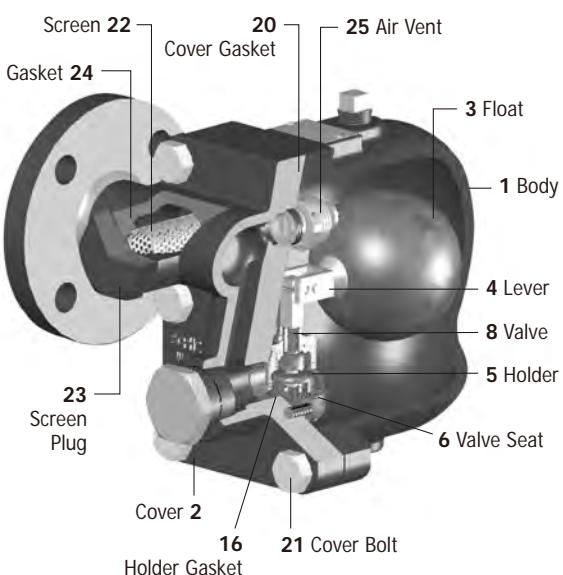


GTH12

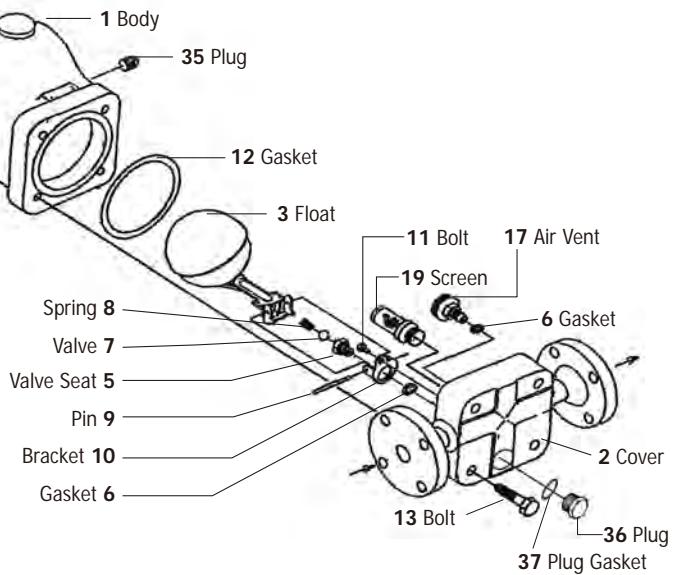

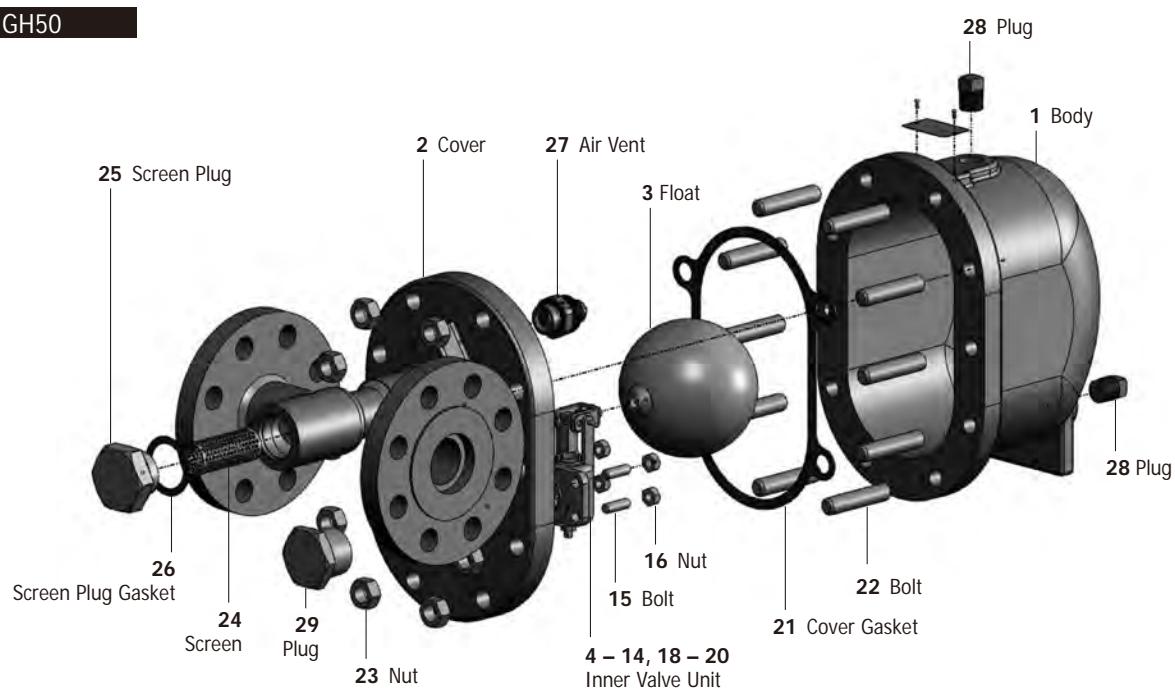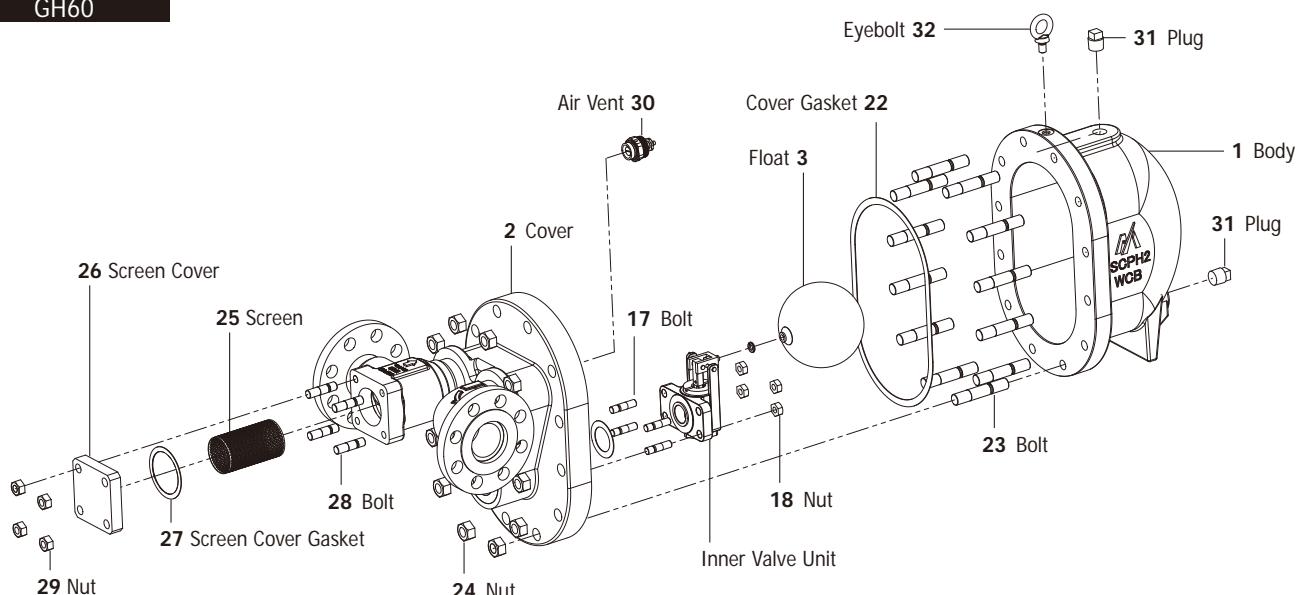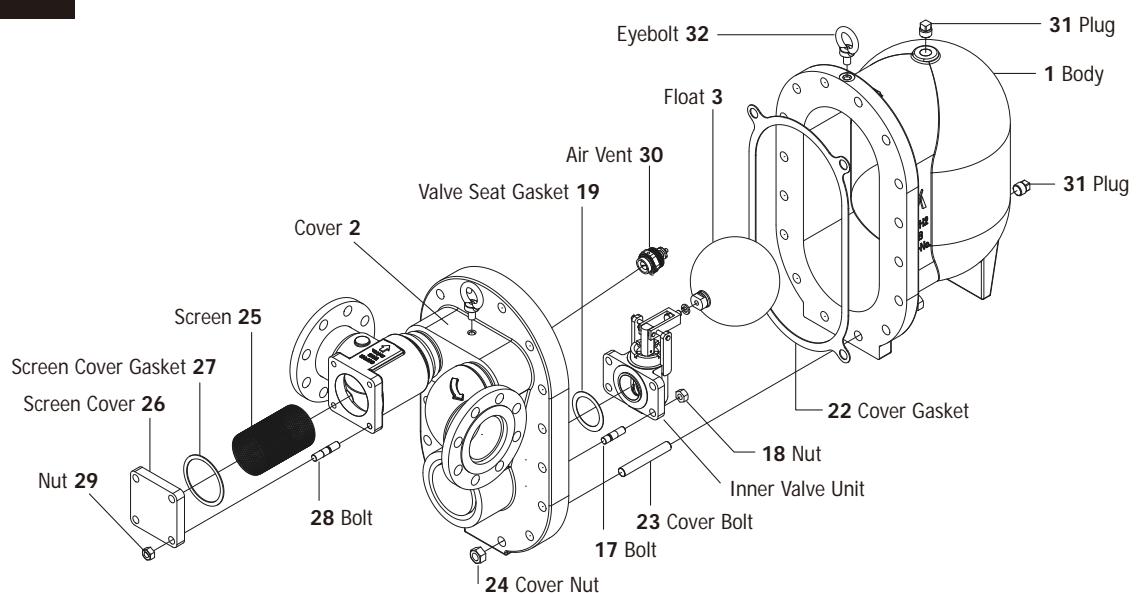SERIES G Spare Parts**GH50****GH60****GH70**

GL11

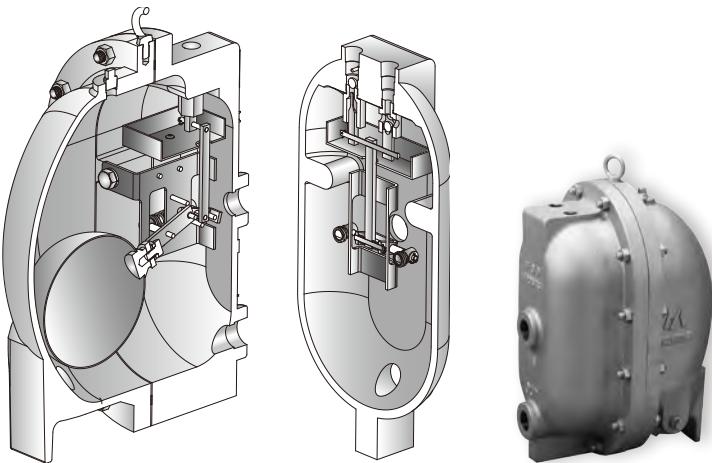

Features


- Small compact pumping trap for condensate recovery.
- As there is no electricity needed to return the condensate, the pumping trap can be used in hazardous areas.
- The pumping trap will work with a low filling head of only 120 mm.
- Air or saturated steam can be used as motive medium.
- The internal parts are manufactured of high quality stainless steel. A special spring snap mechanism between the motive medium inlet valve and the venting valve secures a long life time of the internal mechanism.

Applications


- Condensate return from low pressure installations
- Condensate return to places located higher than the condensate vessel
- Condensate return from vacuum system

Flow Capacity Charts

Motive Medium: Saturated Steam

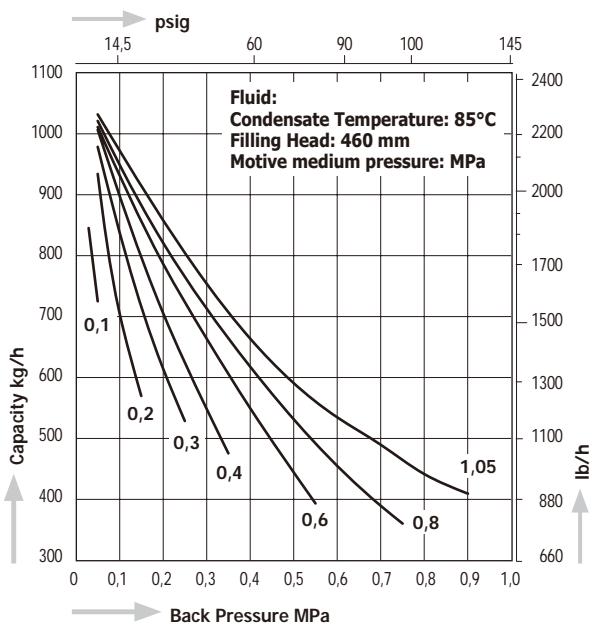

Motive Medium: Air/N₂

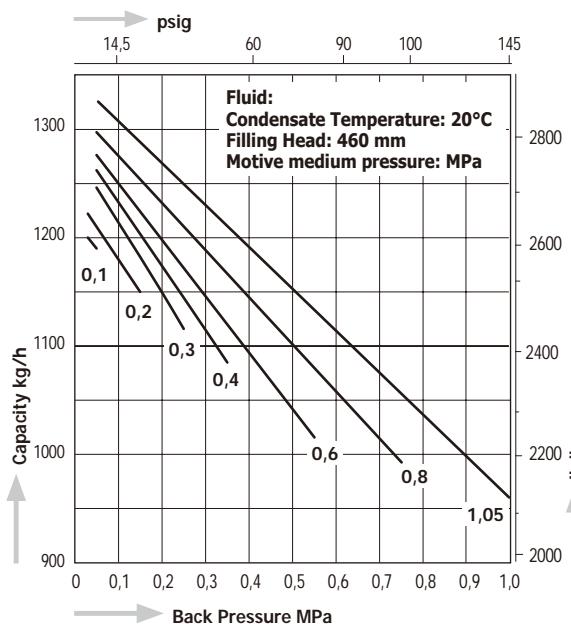


Capacity for other filling heads:

To get the capacity for other filling heads multiply the capacity of this chart by the "FH-factors".

Filling Head	FH-factors
mm	in
120	4.7
300	11.8
460	18.1
700	27.6
1000	39.4
1100	43.3
	1.00
	0.92
	0.79
	1.11
	1.12

Dimensions

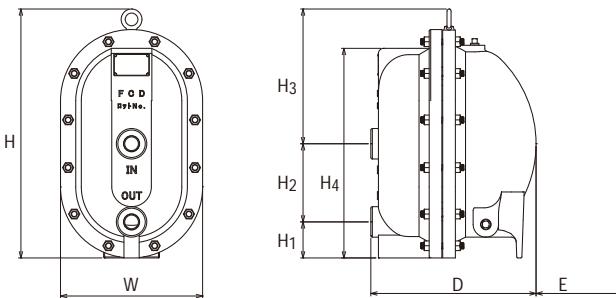

Recommended standard receiver tank dimensions:

Diameter: 8" / DN200

Length: 580 mm / 22.8 inch

If a receiver tank is not available, a standard pipe (size 3" / DN80) can be used as condensate reservoir.


Use the following pipe length:

Connection				Max. Allowable Pressure PMA		Max. Allowable Temperature TMA		Max. Operating Pressure PMO		Max. Operating Temperature TMO	
Inlet Condensate	Outlet Condensate	Inlet Motive Medium	Venting Outlet	MPa	psig	°C	°F	MPa	psig	°C	°F
1" Rc	1" Rc	1/2" Rc	1/2" Rc	1,6	232	220	428	1,05	152	185	365


Dimensions														Body Material		Weight		
H	H1	H2	H3	H4	D	W	E*	kg	lb									
495	19.5	70	2.8	154	6.1	270	10.6	413	16.3	325	12.8	280	11.0	>165	>6.5	Ductile Cast Iron FCD450 comparable with EN-GJS-450-10 (EN-JS1040)	50	110

*Maintenance space


GL81

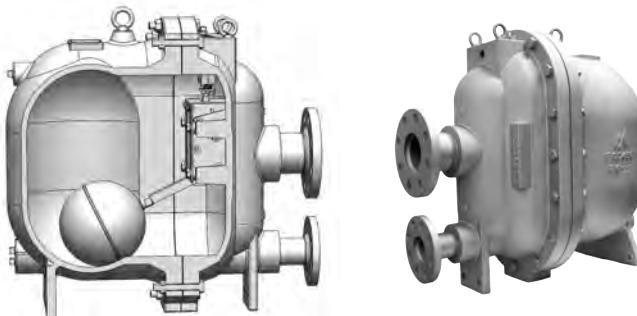

Model: GL81

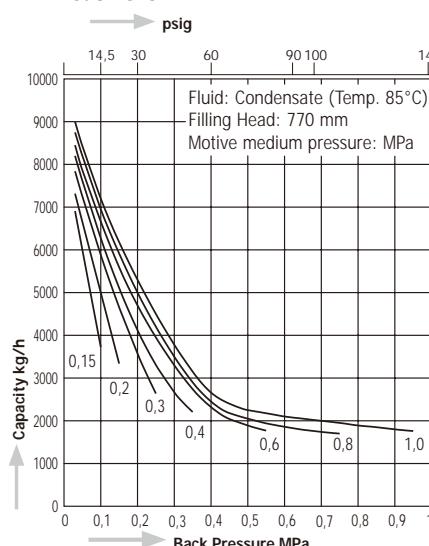

Model: GL81E

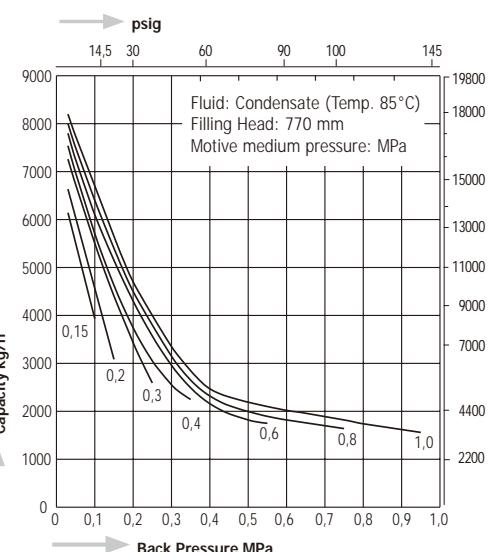



Model GL81 and GL81E: To get the capacity for air as motive medium, please ask MIYAWAKI Inc. or an authorized representative.

Model	Connection				Max. Allowable Pressure PMA		Max. Allowable Temperature TMA		Max. Operating Pressure PMO		Max. Operating Temperature TMO	
	Inlet Condensate	Outlet Condensate	Inlet Motive Medium	Venting Outlet	MPa	psig	°C	°F	MPa	psig	°C	°F
GL81E	Flanged PN16, ASME 150lb				Screwed Rc		1,6		232	220	428	1,05
	DN80 (3")	DN50 (2")	1/2"	1"					152	185	365	
GL81	Flanged JIS16KFF, ASME 150lb				Screwed Rc		1,6		232	220	428	1,05
	DN80 (3")	DN50 (2")	1/2"	1"					152	185	365	


Model	Dimensions												Body Material	Weight							
	H		H1		H2		H3		D		D1		W		W1		E*		kg	lb	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in			
GL81E	670	26.4	123	4.8	220	8.7	579	22.8	680	26.8	240	9.4	368	14.5	50	2.0	> 380	> 15.0	Ductile Cast Iron FCD450 comparable with EN-GJS-450-10 (EN-JS1040)	160	353
GL81																					

* Maintenance space

Dimensions

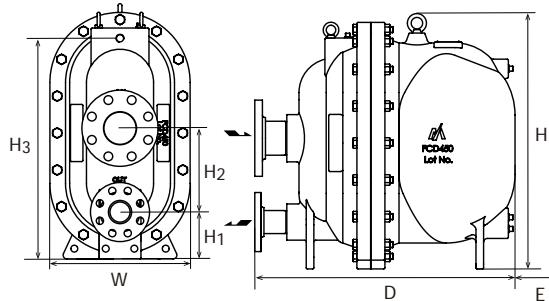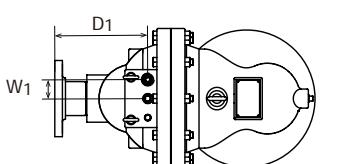


Steam and Air consumption chart for GL81 (E)

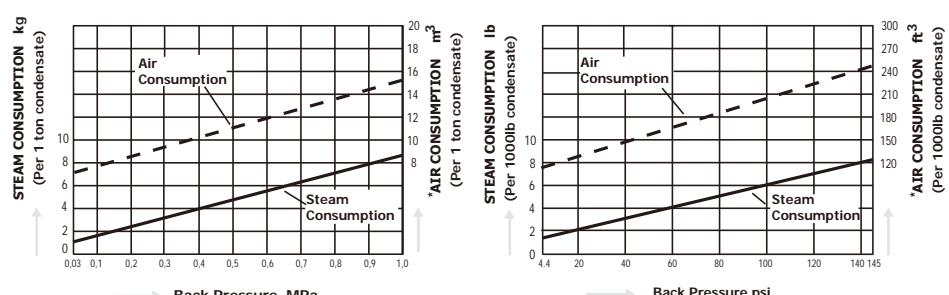


Equivalent consumption of air at 20°C (68°F) under atmospheric pressure.

GLP81

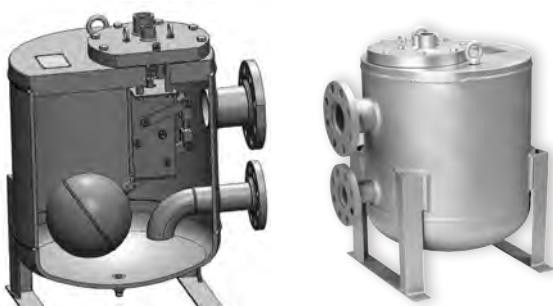


Flow Capacity Charts

Model: GLP81

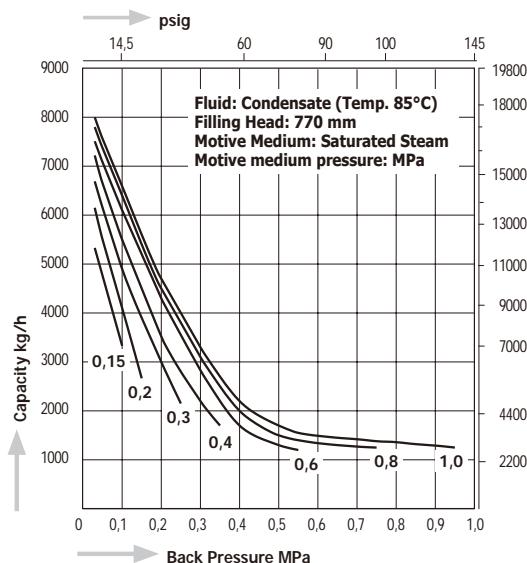

Model: GLP81E

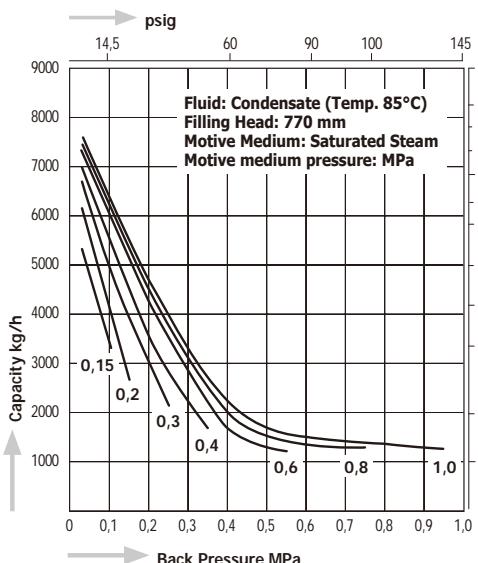

Capacity for other filling heads:

To get the capacity for other filling heads multiply the capacity of this chart by the "FH-factors".

Filling Head mm	Filling Head in	FH-factors	
		0.66	0.75
150	5.9	0.66	0.75
270	10.6	0.75	0.82
370	14.5	0.82	0.92
570	22.4	0.92	1.00
770	30.3	1.00	1.01
970	38.2	1.01	1.03
1270	50.0	1.03	


Model GLP81 and GLP81E: To get the capacity for air as motive medium, please, see our Technical Bulletin No. 017-002.

Model	Connection				Max. Allowable Pressure PMA		Max. Allowable Temperature TMA		Max. Operating Pressure PMO		Max. Operating Temperature TMO			
	Inlet Condensate	Outlet Condensate	Inlet Motive Medium	Venting Outlet	MPa	psig	°C	°F	MPa	psig	°C	°F		
GLP81E	Flanged PN16, ASME 150lb				Screwed Rc				1,6	232	220	428		
	DN80 (3")	DN50 (2")	1/2"	1"										
GLP81	Flanged JIS16KFF, ASME 150lb				Screwed Rc				1,6	232	250	482		
	DN80 (3")	DN50 (2")	1/2"	1"										
Model	Dimensions										Weight			
	H	H1	H2	D	D1	D2	W	E*			kg	lb		
	mm	in	mm	in	mm	in	mm	in	Carbon steel (Details see Technical drawing)					
GLP81E	670	26.4	250	9.8	210	8.3	550	21.7	112		246			
GLP81	660	26.0	230	9.1	380	15.0	400	15.7	150		330			


*Maintenance space

Stainless Steel as body material for GLP81 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

Dimensions

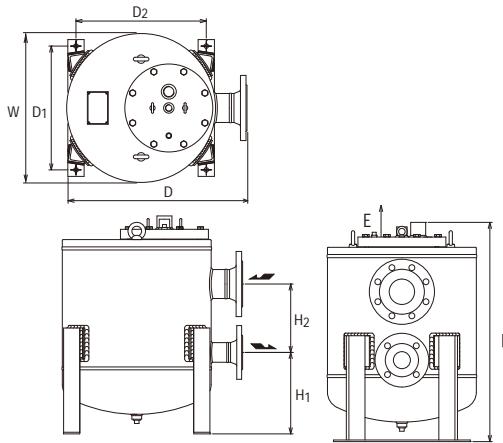


Steam and Air consumption chart for GLP81 (E)

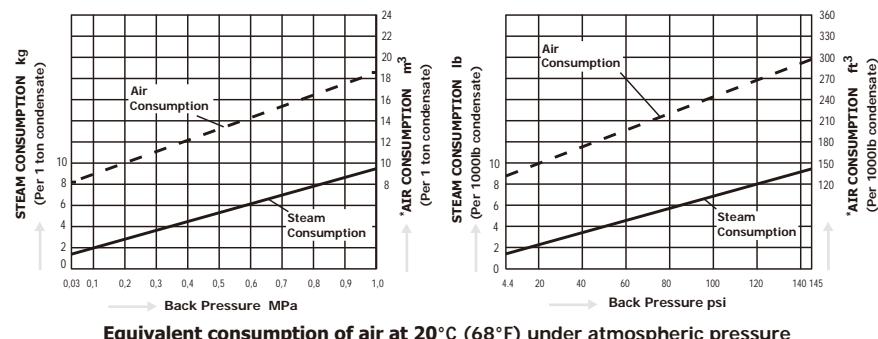


Equivalent consumption of air at 20°C (68°F) under atmospheric pressure

Installation line examples**Open system**


● GL81(E)

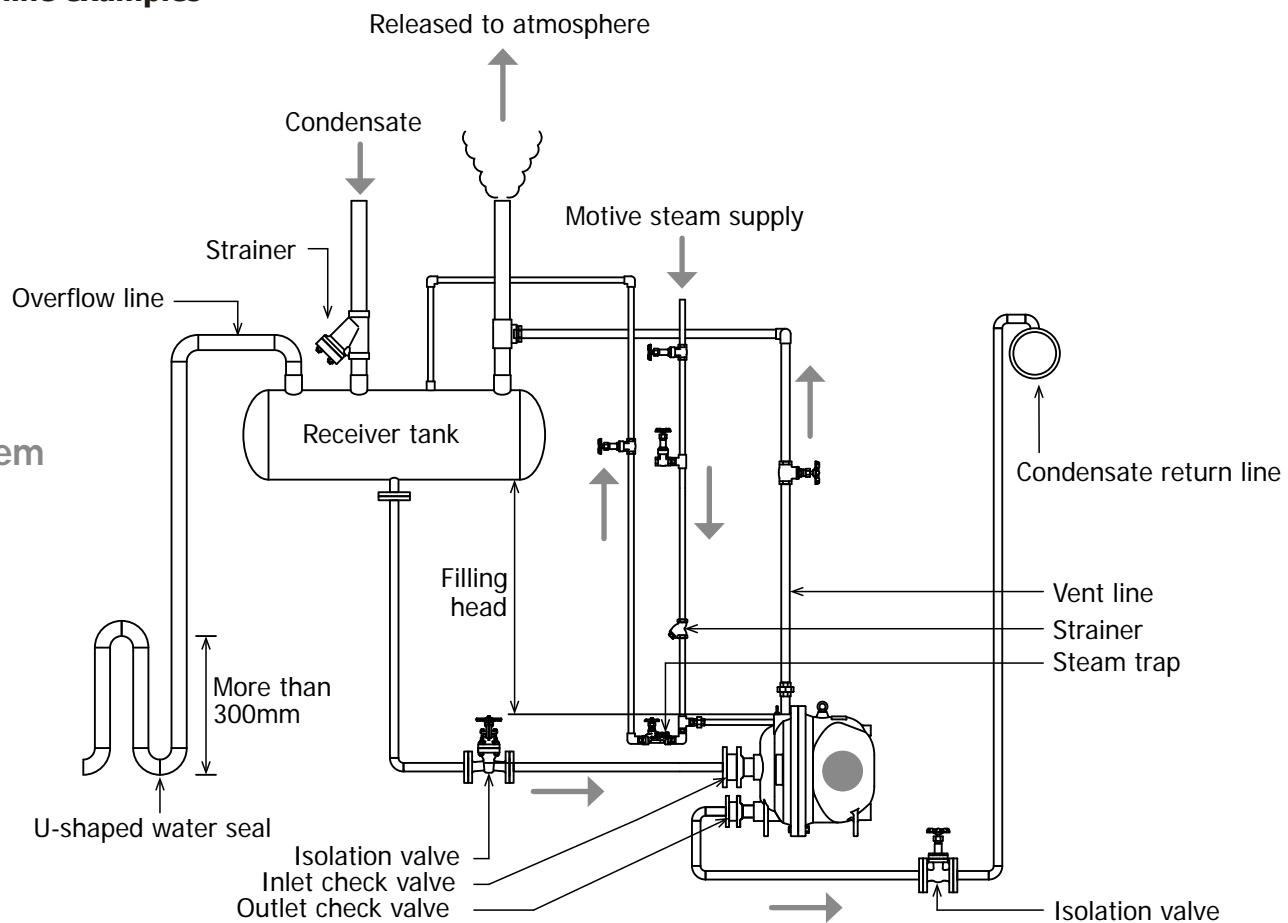**Closed system**


● GL81(E)

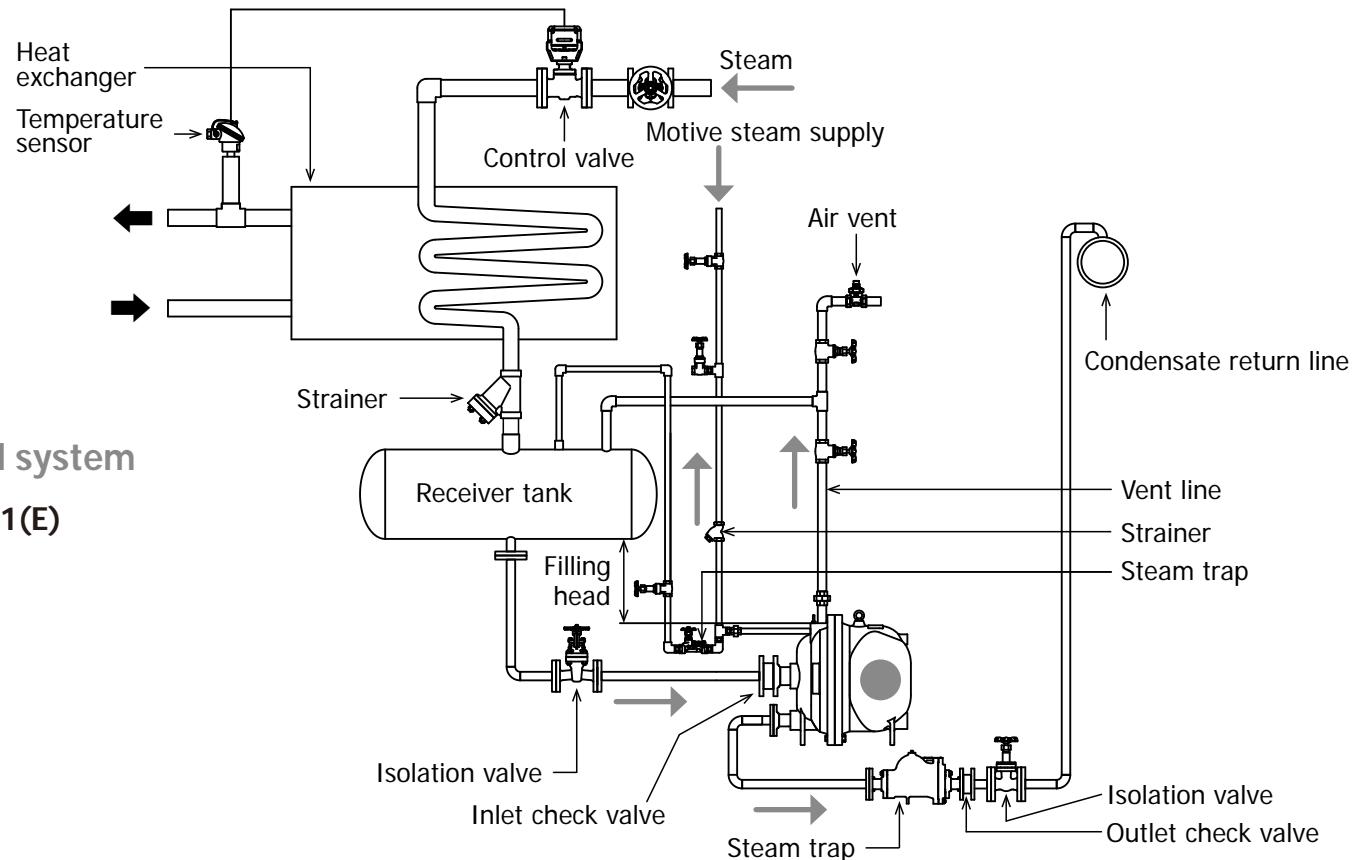


GL11

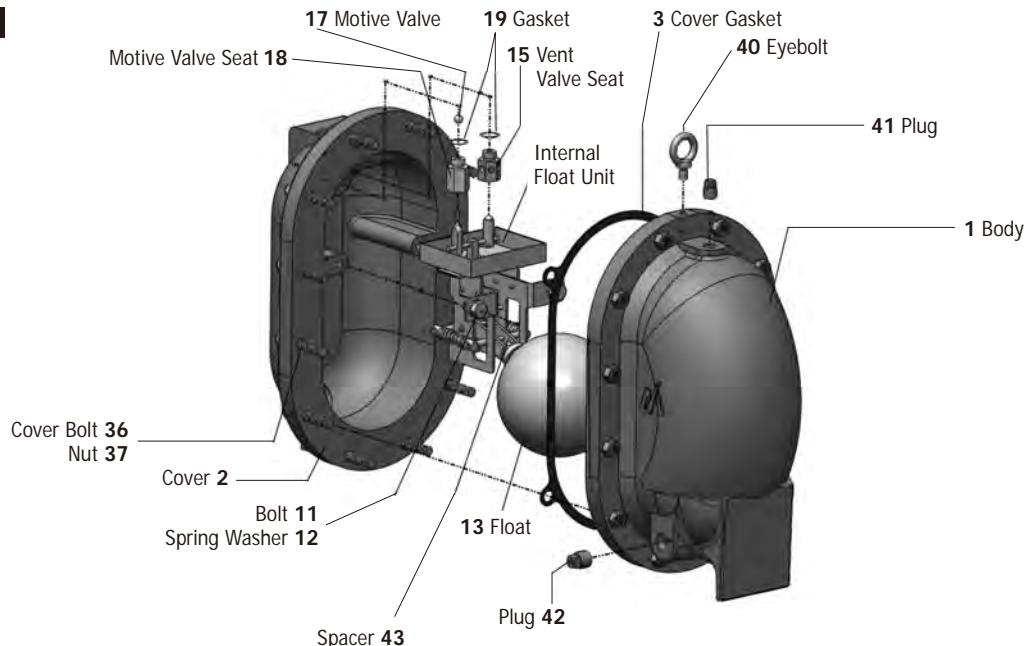

GLP81

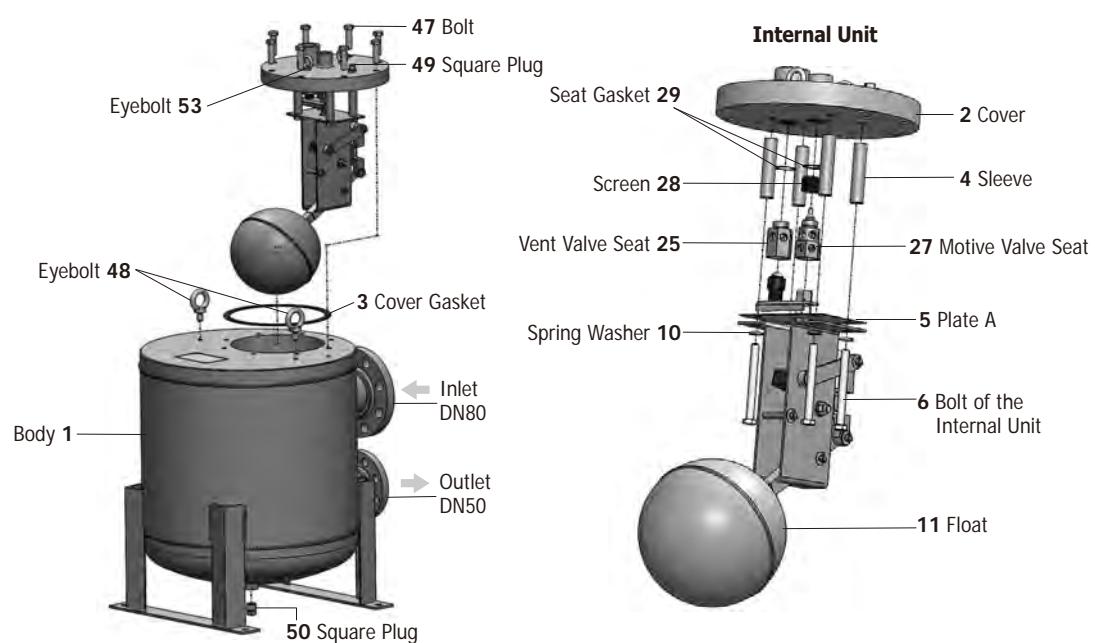

GL81

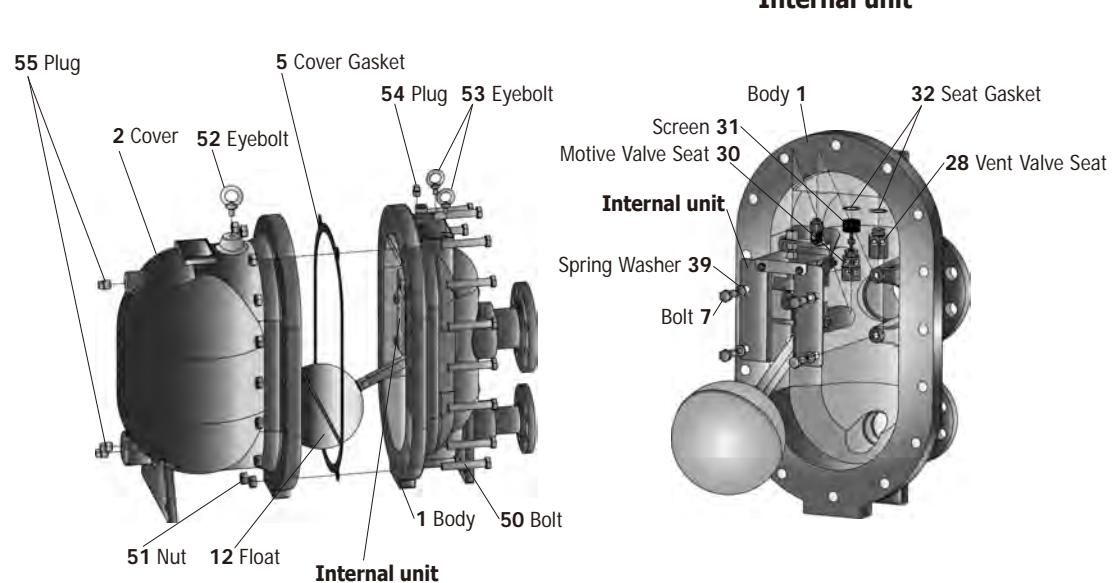

Steam Traps with Two-bolt Connection**DC1-21U**





Balanced Pressure
Thermostatic Type

**SU2-32U**

Thermodynamic Type

**All models:**

With stainless steel body and stainless steel internals. For horizontal and vertical installation. Two-bolt connection for simplified replacement of the steam trap.

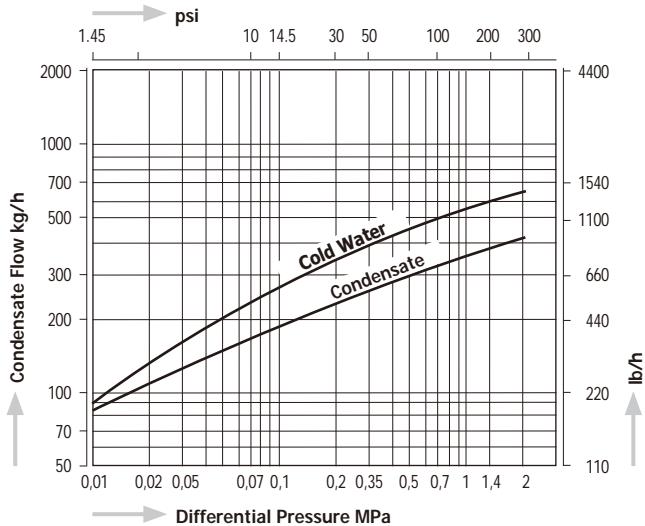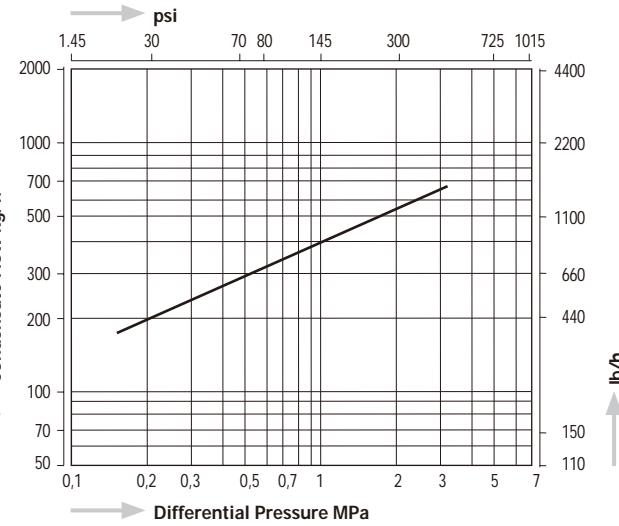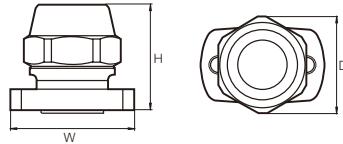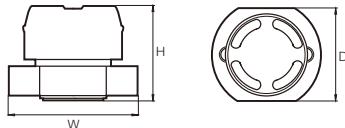Capacity Chart DC1-21U**Capacity Chart SU2-32U****Dimensions****Dimensions**

Model	Connection	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Body Material		Weight	
		MPa	psig	°C	°F	D	H	W	D	H	W	kg	lb		
DC1-21U	Universal Two-bolt Connection	2,1	305	235	455	55	62	70	2,2	2,4	2,8	Stainless Steel CF8M	0,8	1,8	
SU2-32U		3,2	464	350	662	60	55	70	2,4	2,2	2,8	Stainless Steel SUS420J2	0,8	1,8	

UNC





Connector Body for Models:
DC1-21U & SU2-32U



Screwed



with Blow-down Valve

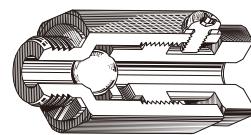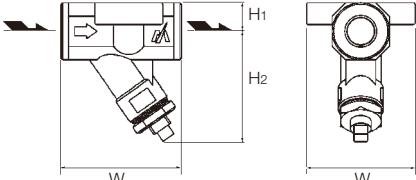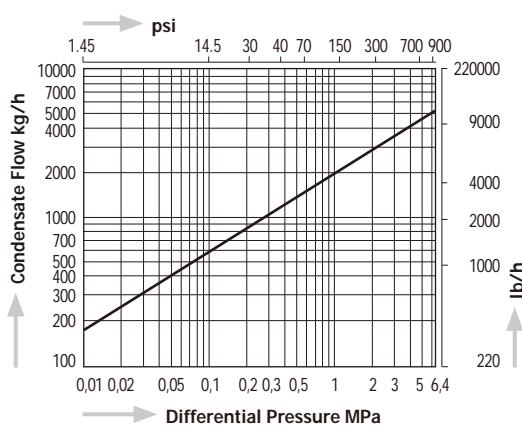**Dimensions****Capacity Chart**

Model	Connection	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb	
UNC UNC-W	Screwed & Socket Weld	1/2'' 3/4''	3,2	464	400	752	80	19	73	72	3.15	0.75	2.9	2.8	Stainless Steel A351CF8M	1,0	2,2
VB1	Screwed G	1/4''	6,4	928	425	800	46				25	1.8			Stainless Steel SUS304	0,08	0,18
VB1R	Screwed R						50				2.0						

Air Traps

SERIES A

MIYAWAKI Air Traps are designed for discharge of condensate from air piping, receiver tanks, gas and compressed air systems.


Depending on the operating conditions and applications a wide range of various types of air traps is available. Most of the traps can be fitted with a pressure – balancing line to ensure air can escape from the trap body to prevent air locking. Pressure-balancing lines are usually not necessary, if the air trap is installed directly below the equipment to be drained or if the trap is installed vertically.

MIYAWAKI offers different seat materials and various body materials (including stainless steel) for draining special gas applications.

Models


AG11, AG12	Cast iron ball float air traps for medium condensate amounts
AGC1V	Stainless steel ball float air trap for small condensate loads (vertical installation)
AG29	Ductile cast iron ball float air and gas trap
AGH29	Cast steel ball float air and gas trap
AGU29	Stainless steel ball float air and gas trap
AGH12, AGH50	Cast Steel ball float air and gas trap
AE8	Ductile cast iron inverted bucket air trap
AV	Cast iron thermodynamic air trap with incorporated bypass

Installation Example

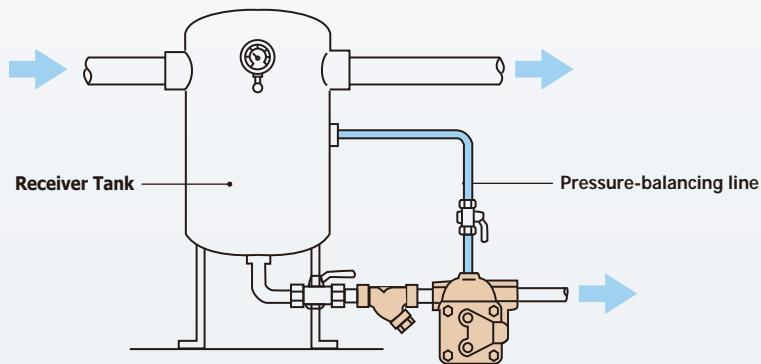

Operating principle


■ cold condensate ■ air

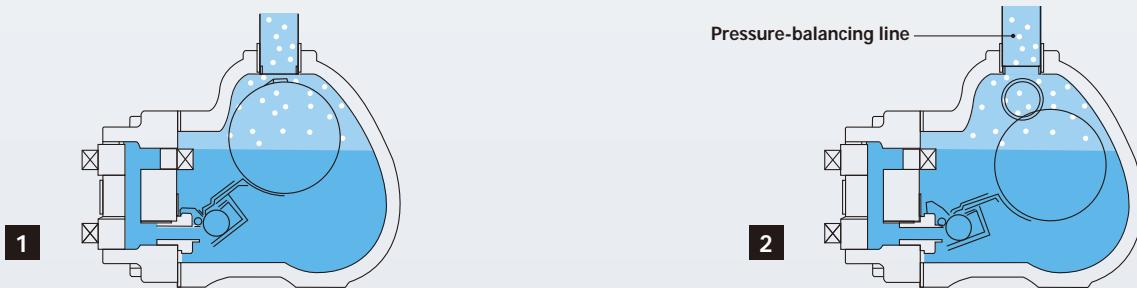


At start-up condensate enters the air trap. The float is rising and the condensate will be discharged through the wide open valve. Air, which usually enters the trap body together with the condensate, will accumulate in the upper part of the trap body. To prevent air locking, a pressure-balancing line connects the upper part of the trap with the drained equipment, so that the air can escape easily from the trap body.

Condensate continuously enters the air trap. Depending on the condensate amount the float will move upwards or downwards to open or close the valve seat. Usually a certain liquid level will be maintained in the trap body and condensate will be discharged continuously. Air will leave the trap body through the pressure-balancing line.


AG11, AG12

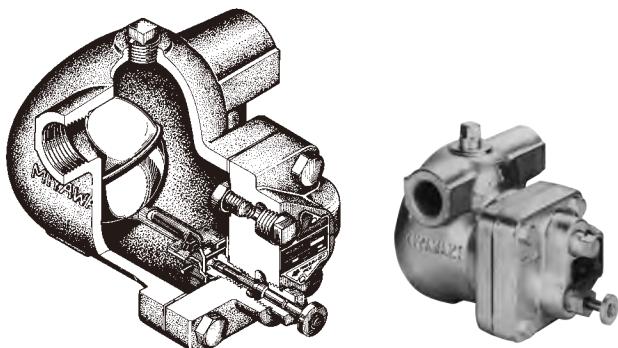


Capacity Chart AG11, AG12

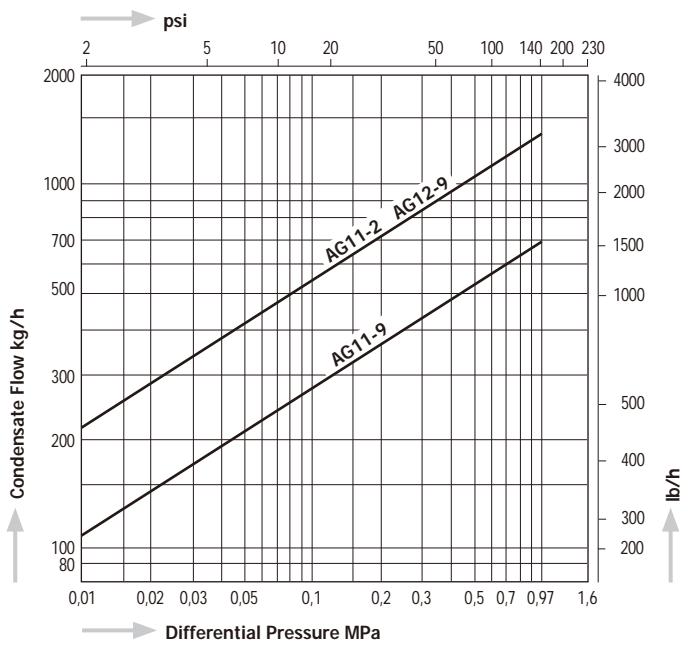


Dimensions AG11, AG12

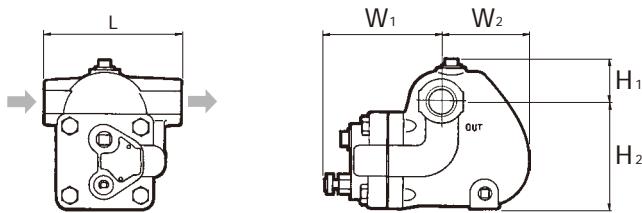


AGC1V

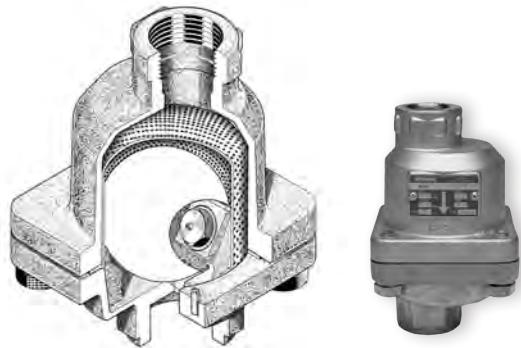

Capacity Chart AGC1V


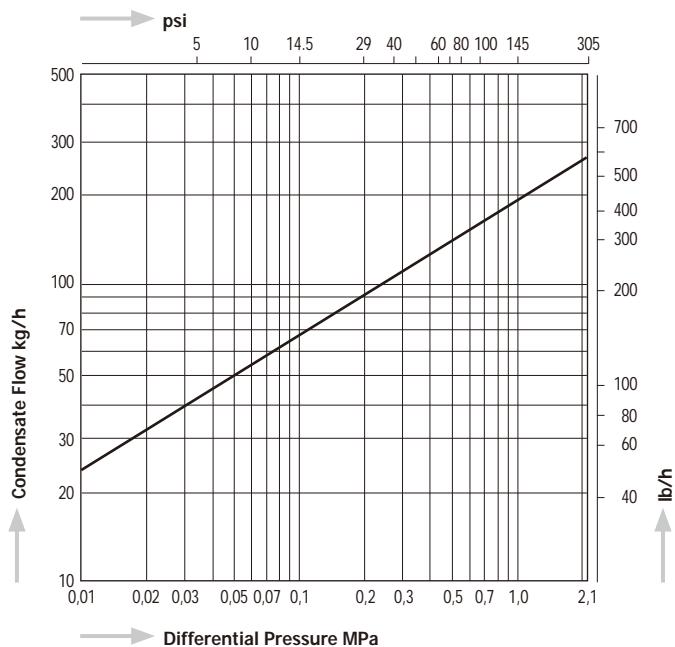


Dimensions AGC1V, AGC1V-W, AGC1V-F

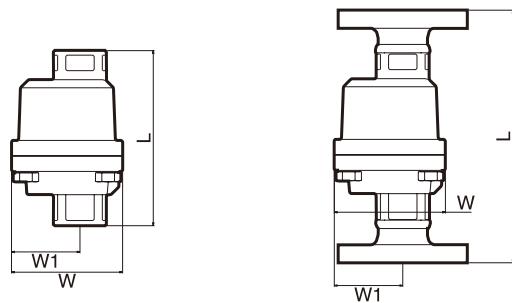


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)					Dimensions (in)					Body Material	Weight								
			MPa	psig	°C	°F	L	H1	H2	W1	W2	W	L	H1	H2	W1	W2	W	kg	lb						
AG11 - 2	Screwed Rc, NPT	1/2'', 3/4''	0,2	29	100	212	120	37	92	121	60	-	4.7	1.5	3.6	4.8	2.4	-	Cast Iron FC250	3,9	8.6					
			0,97	140			140	47	113	129	92		5.5	1.9	4.4	5.1	3.6			5,9	13.0					
AG12 - 9	Screwed Rc, NPT	3/4'', 1''	0,97	140	2,1	305	350	662	127	53	86	5.0	2.1	3.4	-	-	-	1.8	4.0							
AGC1V		1/2''	2,1	305					136											1,9	4.2					
		3/4''							140											2,0	4.4					
		1''							127	53	86	5.5	2.0	3.4	-	-	-	1.8	4.0							
AGC1V-W	Socket Weld JIS, ASME, DIN	1/2''	2,1	305	350	662	-	-	136											1,9	4.2					
		3/4''							140											2,0	4.4					
		1''							127											1,8	4.0					
AGC1V-F	Flanged JIS, ASME, DIN	1/2''	2,1	305	350	662	-	-	136	53	86	5.4	2.1	3.4	-	-	-	1,8	4.0							
		3/4''							140											1,9	4.2					
		1''							127											2,0	4.4					


Horizontal version for AGC1V is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

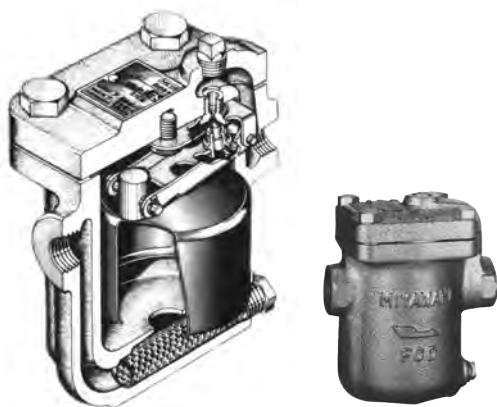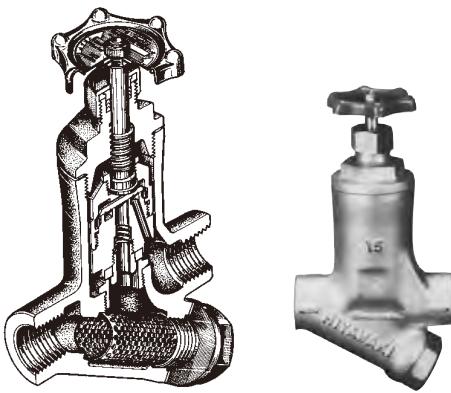AE8**AV**

Capacity Chart AE8

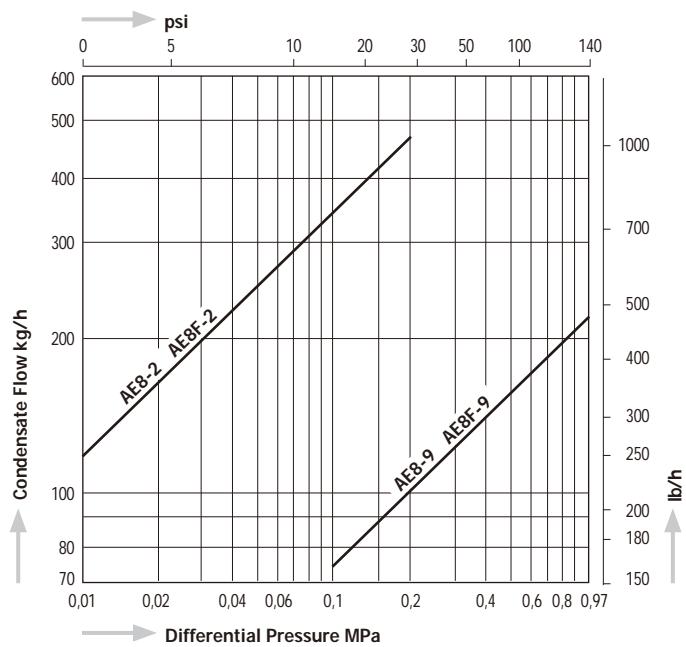


Capacity Chart AV

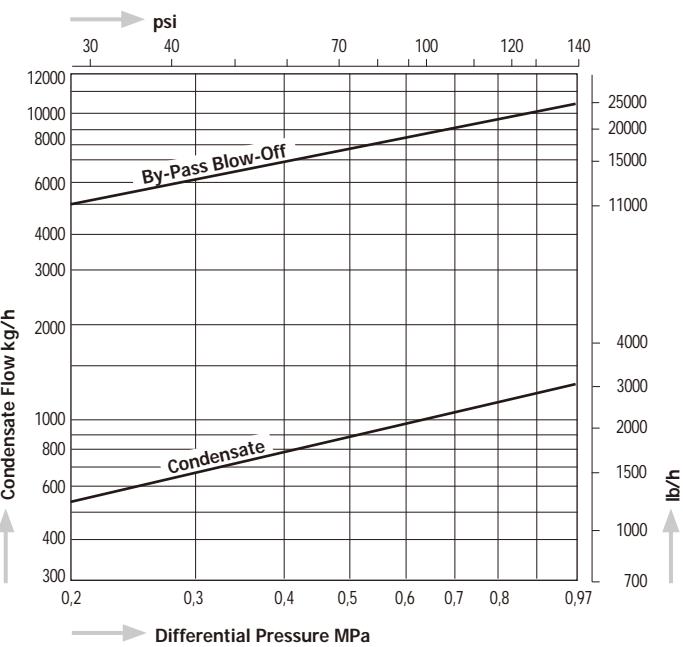


Dimensions


AE8

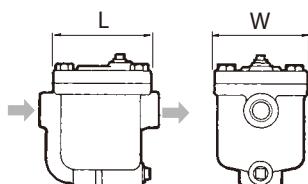

AE8F

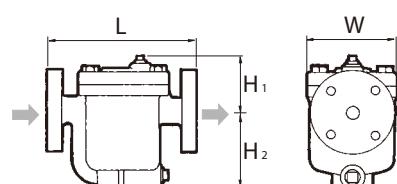


AV

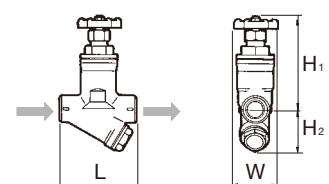


Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
AE8-	Screwed Rc, NPT	½"	0,2	29	350	662	130	73	90	100	5.1	2.9	3.5	3.9	Ductile Cast Iron FCD450	3,7	8.1
		¾"					135				5.3					3,9	8.6
		1"					130	73	90	100	5.1	2.9	3.5	3.9		3,7	8.1
		½"	0,97	140	350	662	135				5.3					3,9	8.6
		¾"					175	73	90		6.9	2.9	3.5			5,3	11.7
		1"					195	68	95	100	7.7	2.7	3.7	3.9		5,7	12.5
AE8F-	Flanged JIS, ASME, DIN	½"	0,2	29	350	662	215				8.5					6,8	15.0
		¾"					175	73	90		6.9	2.9	3.5			5,3	11.7
		1"					195	68	95	100	7.7	2.7	3.7	3.9		5,7	12.5
		½"	0,97	140	350	662	215				8.5					6,8	15.0
		¾"					175	73	90		6.9	2.9	3.5			5,3	11.7
		1"					195	68	95	100	7.7	2.7	3.7	3.9		5,7	12.5
AV-4	Screwed Rc, NPT	½"	0,97	140	150	302	110		60		4.3	2.4			Cast Iron FC250	2,4	5.3
AV-6		¾"					120	155	65	65	4.7	6.1	2.6	2.6		2,5	5.5
AV-8		1"							70				2.8			2,7	5.9

AG29

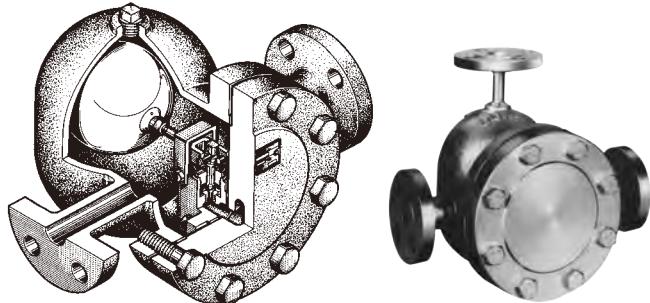


Capacity Chart AG29, AGH29, AGU29

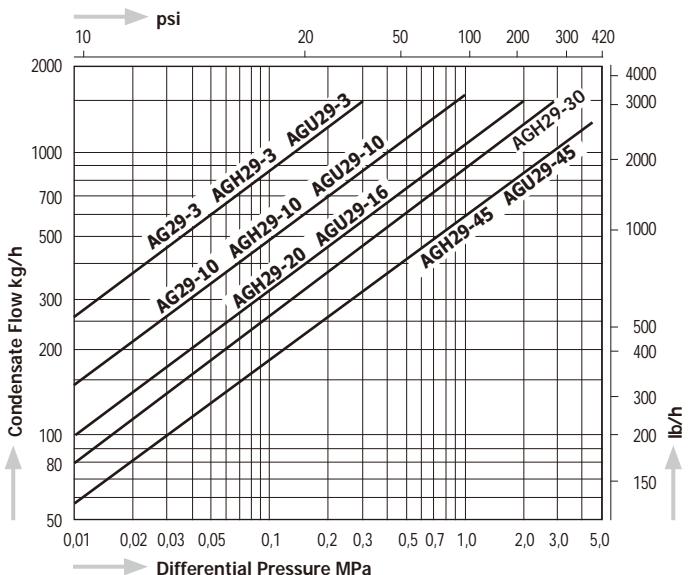


Dimensions

AG29, AGH29, AGU29

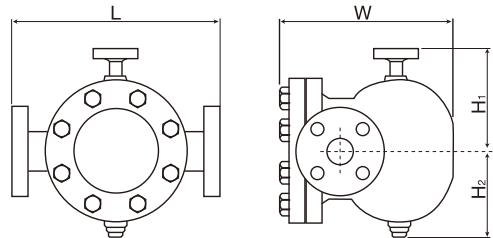


AGH29W, AGU29W

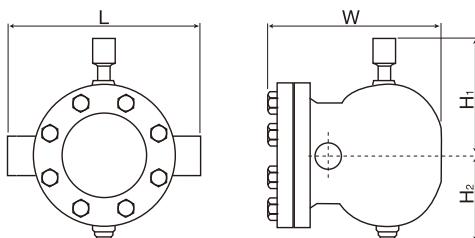

Model	Connections	Size	Max. Operating Pressure PMO		Max. Differential Pressure PMX		Max. Operating Temperature TMO		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
AG29 -	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	0,3	43	0,3	43	300	572	340	200	120	260	13.4	7.9	4.7	10.2	Ductile Cast Iron FCD450	26	57.2
			0,97	140	0,97	140													
AGH29 -	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 2''$	3,0	435	0,3	43	400	752	340 $\frac{1}{2}'' - 1''$ 390 $1\frac{1}{4}'' - 2''$	200	120	260	13.4 $\frac{1}{2}'' - 1''$ 15.4 $1\frac{1}{4}'' - 2''$	7.9	4.7	10.2	Cast Steel SCPH2	28,0* $\frac{1}{2}'' - 1''$ 32,0* $1\frac{1}{4}'' - 2''$	61,6* $\frac{1}{2}'' - 1''$ 70,4* $1\frac{1}{4}'' - 2''$
					1,0	145													
					2,0	290													
					3,0	435													
			4,5	652	4,5	652													
AGH29W -	Socket Weld JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	3,0	435	0,3	43	400	752	280	200	120	260	11.0	7.9	4.7	10.2	Stainless Steel SCS13A	25,5	56.1
					1,0	145													
					2,0	290													
					3,0	435													
			4,5	652	4,5	652													
AGU29 -	Flanged JIS, ASME, DIN	$\frac{1}{2}'' - 2''$	3,0	435	0,3	43	400	752	340 $\frac{1}{2}'' - 1''$ 390 $1\frac{1}{4}'' - 2''$	200	120	260	13.4 $\frac{1}{2}'' - 1''$ 15.4 $1\frac{1}{4}'' - 2''$	7.9	4.7	10.2	Stainless Steel SCS13A	28,0* $\frac{1}{2}'' - 1''$ 32,0* $1\frac{1}{4}'' - 2''$	61,6* $\frac{1}{2}'' - 1''$ 70,4* $1\frac{1}{4}'' - 2''$
					1,0	145													
					1,6	230													
					4,5	652													
					4,5	652													
AGU29W -	Socket Weld JIS, ASME, DIN	$\frac{1}{2}'' - 1''$	3,0	435	0,3	43	400	752	280	200	120	260	11.0	7.9	4.7	10.2	Stainless Steel SCS13A	25,5	56.1
					1,0	145													
					1,6	230													
					4,5	652													
					4,5	652													

* The weight may differ depending on the size and flange standard.


AGH12, AGH50

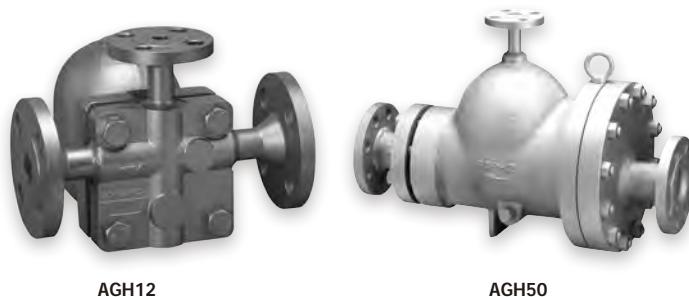

AGH12


AGH50

Capacity Chart AGH12-45

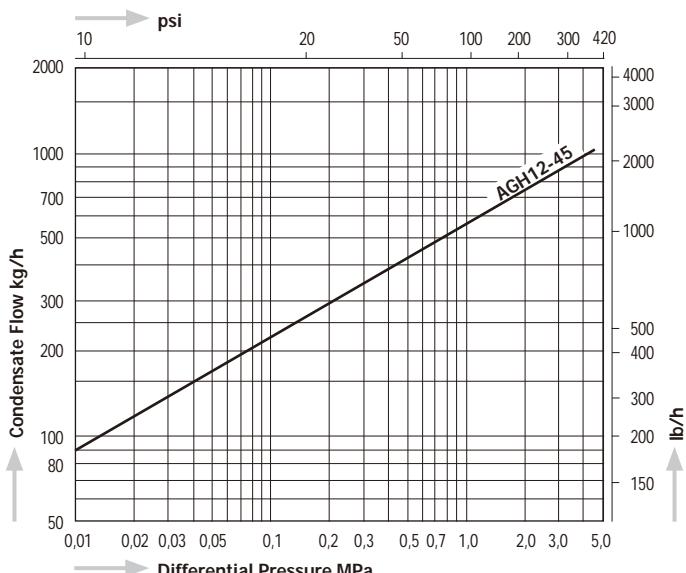


Dimensions


AGH12-45F

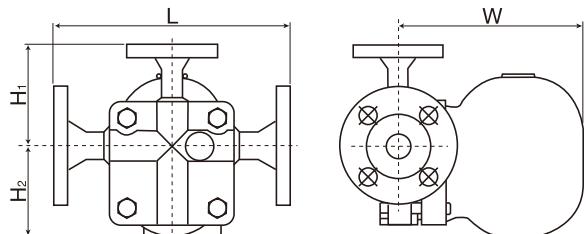

AGH12-45W

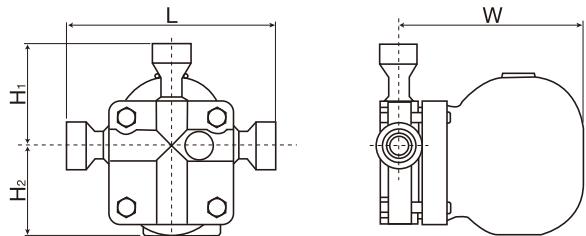

AGH50

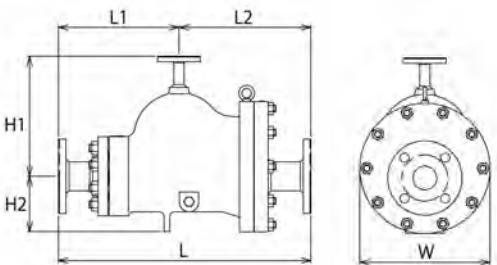

Capacity Chart AGH50

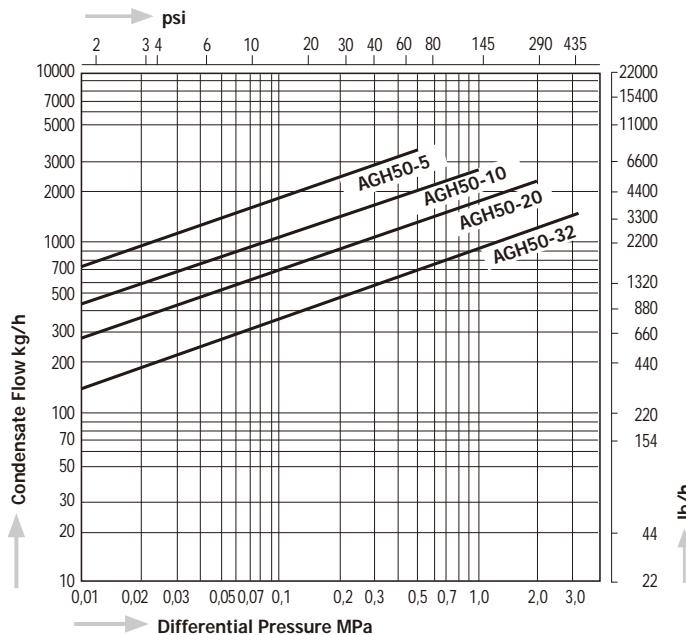


Table 1: Dimensions L and Weight

Model	Size	ASME Class* (#150, #300)								
		Dimensions* (mm)			Dimensions* (in)			Weight*		
		L	L ₁	L ₂	L	L ₁	L ₂	kg	lb	
AGH50	2"	525	250	275	20.7	9.8	10.8	64	140.8	
	2½"	550	265	285	21.7	10.4	11.2	68	149.6	
	3"	555	290	21.9	10.4	11.4	72	158.4		
	4"	590	285	305	23.2	11.2	12.0	73 / 82	160.6 / 180.4	


Model	Connections	Size	Max. Operating Pressure, PMO		Max. Differential Pressure, PMX		Max. Operating Temperature, TMO	Dimensions* (mm)				Dimensions* (in)				Body Material	Weight*			
			MPa	psig	MPa	psig		°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W	kg	lb	
AGH12 - 45F	Flanged JIS, ASME, DIN	½" - 1"	4,5	652	4,5	652	425	800		250	107			9.8				Cast Steel SCPH2	17	37.4
AGH12 - 45W	Socket Weld JIS, ASME, DIN									220	75			8.7	4.2	3.7	7.7		12	26.4
AGH50 - 5	Flanged JIS, ASME, DIN	2" - 4"	3,2	464	0,5	72,5	400	752	Table 1	250	115	270	Table 1	9.8	4.5	10.6	Cast Steel SCPH2	Table 1		
AGH50 - 10					1,0	145				290										
AGH50 - 20					2,0	290				464										
AGH50 - 32																				

* Depending on the flange standard the face-to-face dimensions and the weight may differ.


Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

SERIES A Spare Parts


AG11/AG12

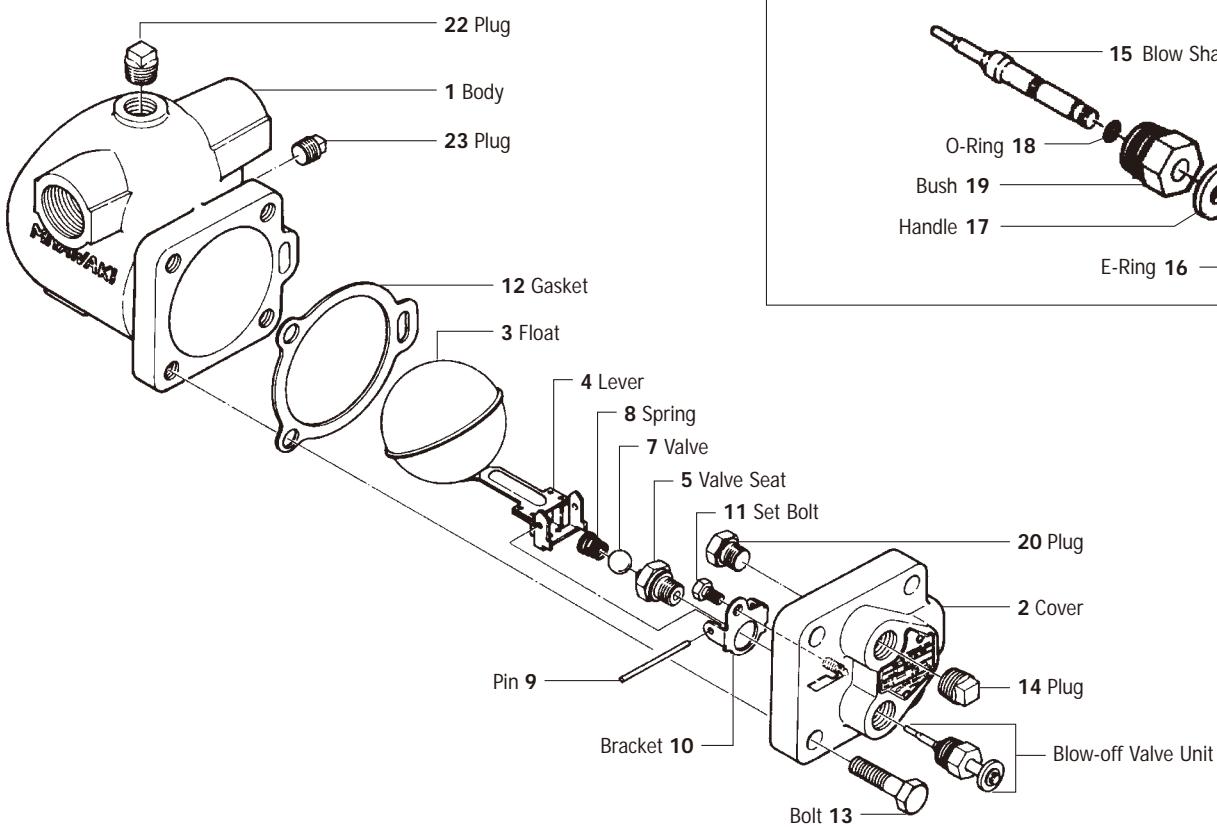


AGC1V

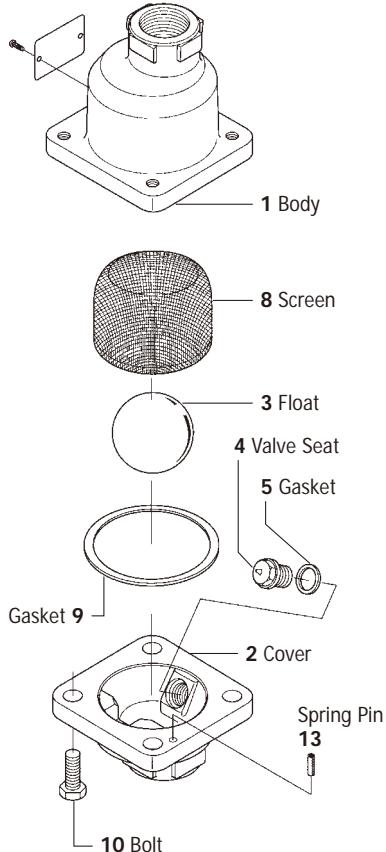


AE8

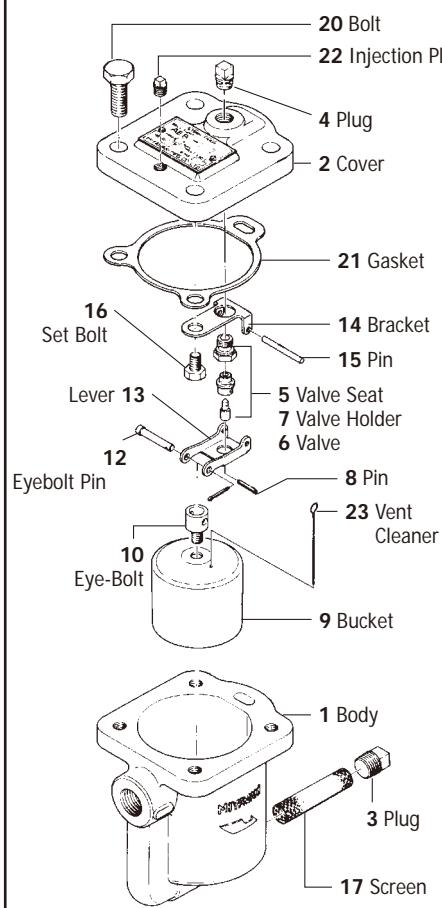


AV

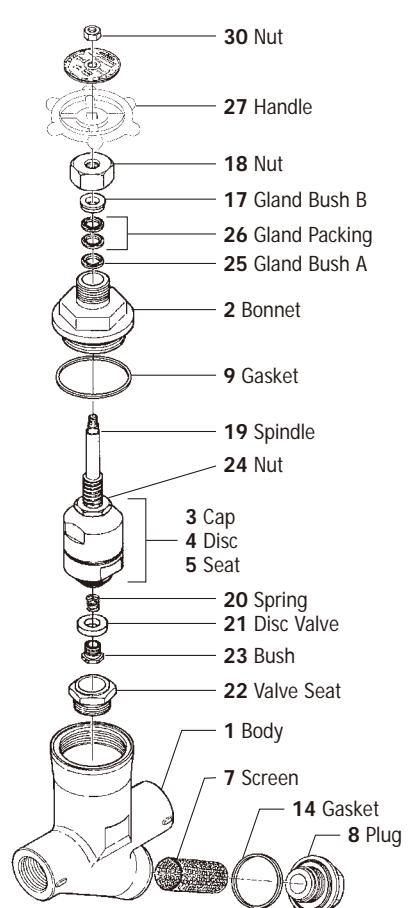


AG29, AGH29, AGU29

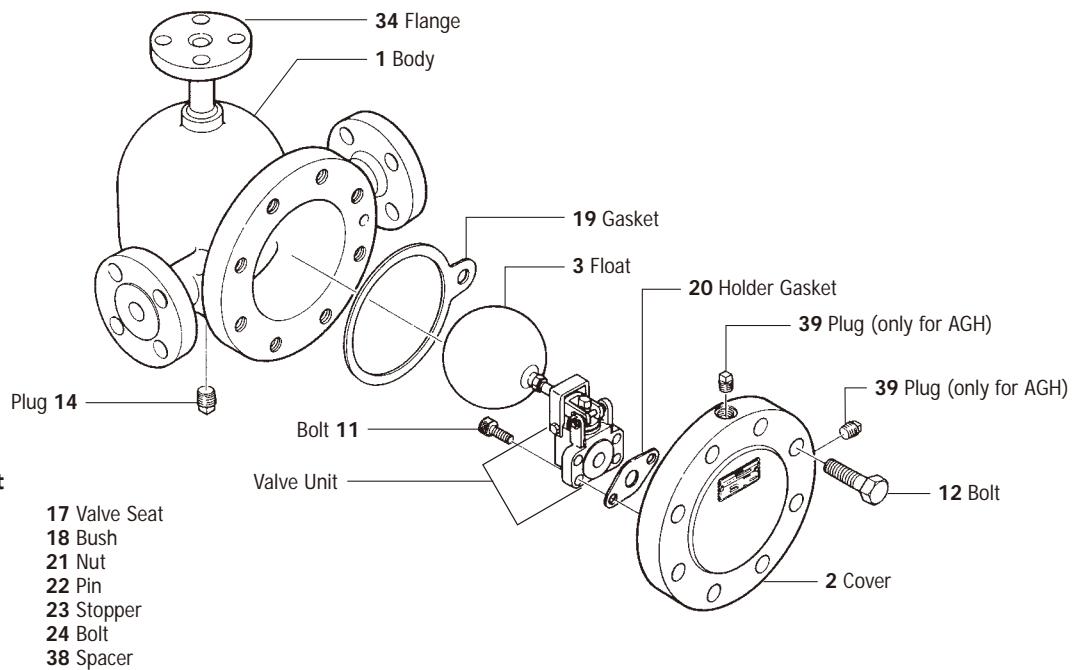


AGH12

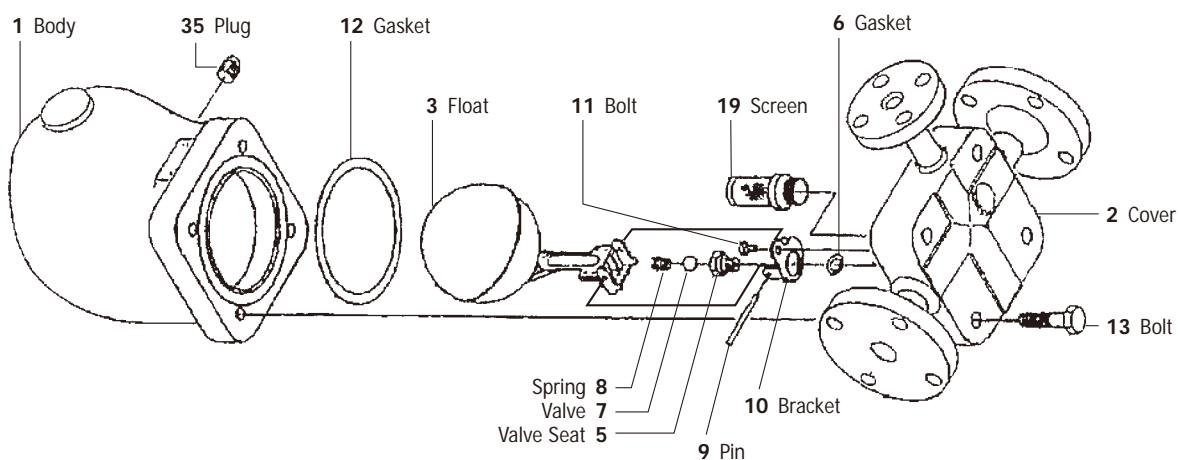

AGH50

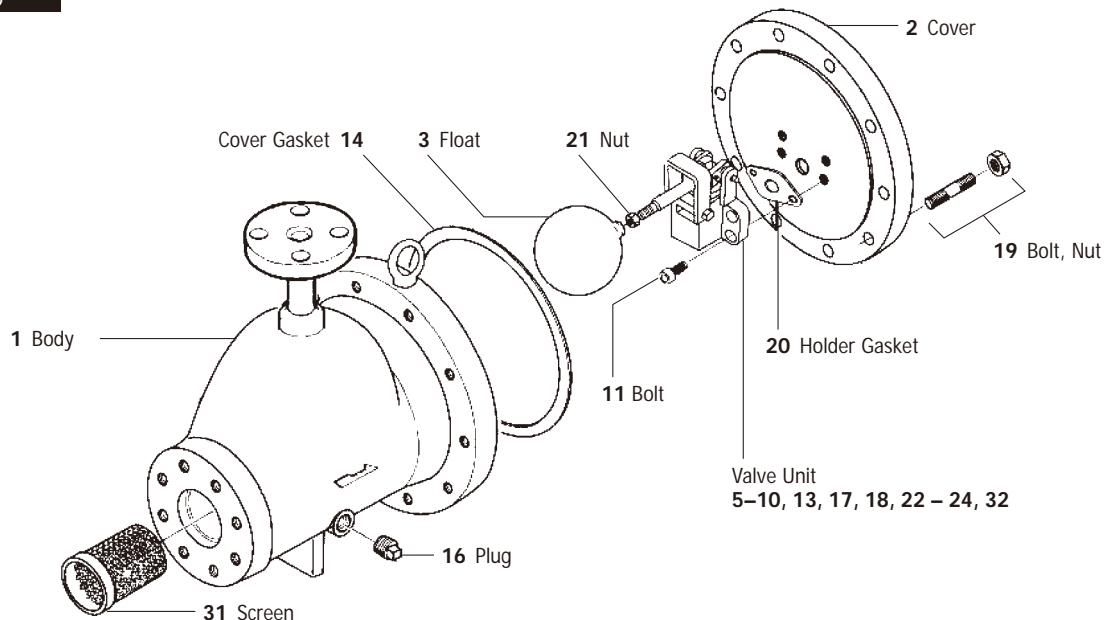

MEMO

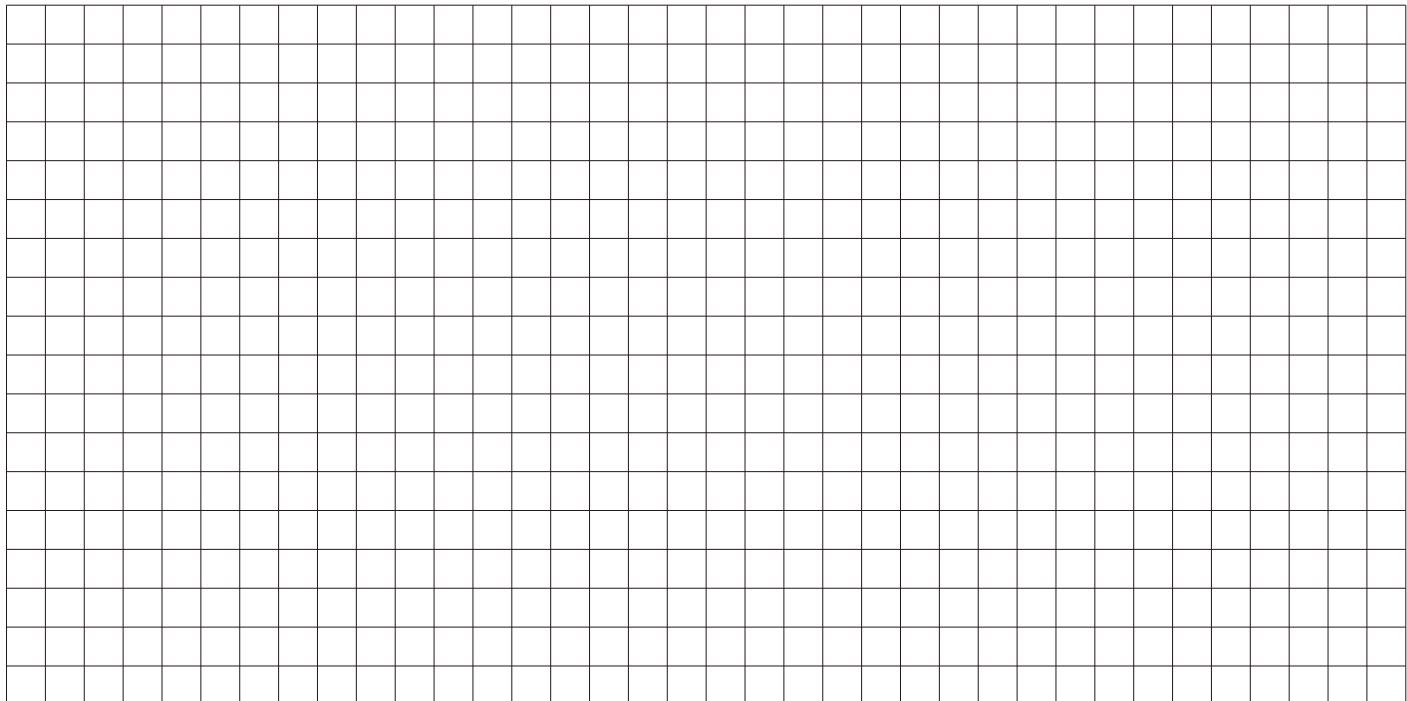

Air Vents

SERIES AT, AD, AW

MIYAWAKI **Air vents** are used to remove air and gases from pipelines for steam and liquids, boilers and other special equipment.

MIYAWAKI offers a wide range of thermostatic air vent. They ensure the efficiency of the system by removing the air and gases accumulated during operation and system downtime.

Air vents must be installed at the highest point of the equipment/ system section to be vented.

Models

AW Thermostatic air vents made of brass


AT7N, AT9N Forged steel, with bimetal and with the ability to adjust the temperature of the exhaust gas-air mixture for equipment with low and medium pressure

ADC1, ADL1 Stainless steel thermostatic air vents


AT51 Forged steel, with the ability to adjust the temperature of the exhaust gas mixture for high pressure equipment

Installation Example


Open boiler

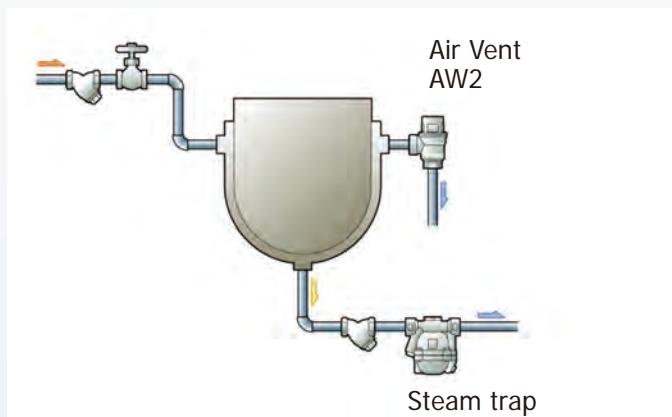


Autoclave






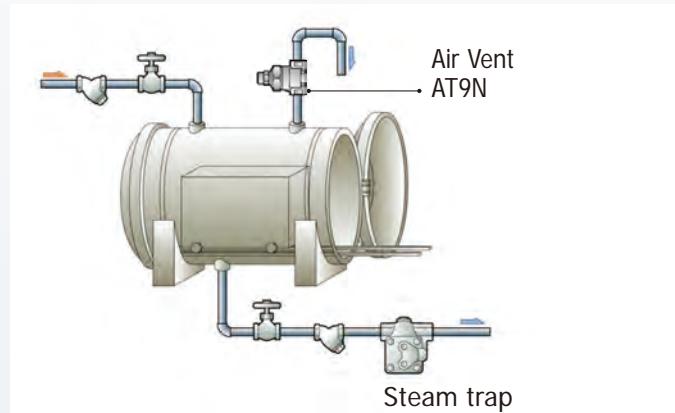


Drum dryer

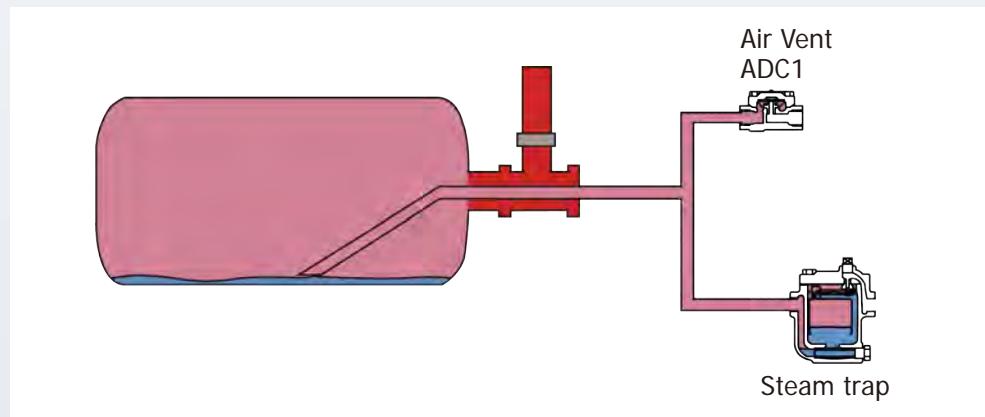

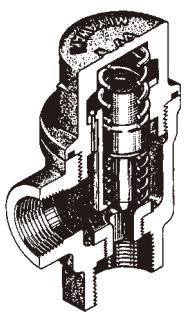
AW2**AT7N****AT9N**

Dimensions

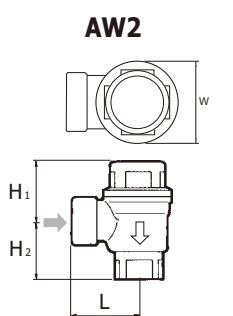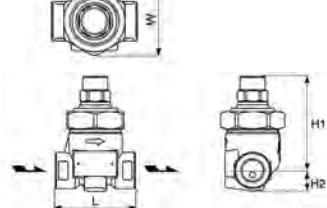
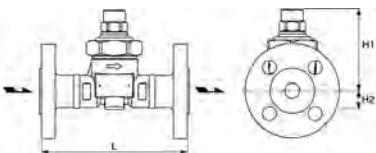
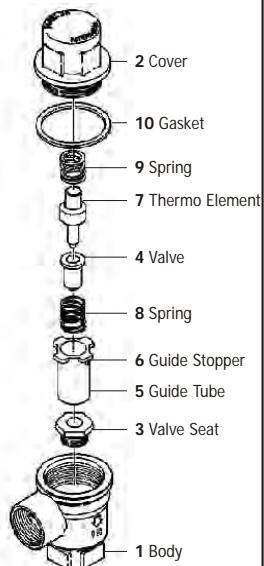
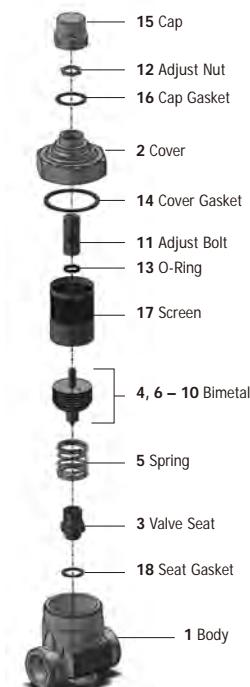
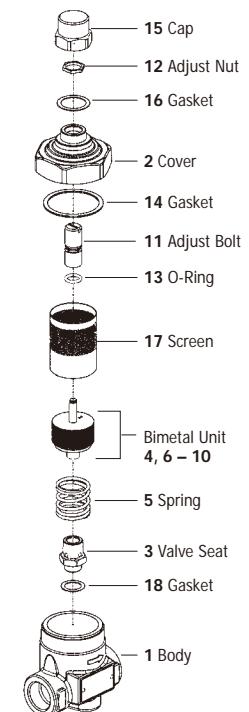
**AT7N, AT7NW
AT9N, AT9NW****AT7NF
AT9NF****AW2****AT7N****AT9N**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
AW2-5	Screwed Rc, NPT	$\frac{1}{2}''$ $\frac{3}{4}''$	0,5	73	160	320	35	42	35 41	41	1.4	1.7	1.4 1.6	1.6	Brass C3771	0,4	1.0
																0,5	1.1
AT7N	Screwed Rc, NPT	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$					70	82	18 19 23	56	2.75 3.1	0.7 0.9	2.2	Forged Steel A105	0,9	2.0	
															1,0	2.2	
															1,1	2.4	
AT7NW	Socket Weld JIS, ASME, DIN	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$	2,1	305			70	82	18 19 23	56	2.75 3.1	0.7 0.9	2.2		0,9	2.0	
															1,0	2.2	
															1,1	2.4	
AT7NF	Flanged JIS, ASME, DIN	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$					70	82	18 19 23	56	5.7*	0.7 0.9	2.2		0,9	2.0	
															2,6	5.7	
															3,4	7.5	
AT9N	Screwed Rc, NPT	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$					70	82	18 19 23	56	2.75 3.1	0.7 0.9	2.2	Forged Steel A105	0,9	2.0	
															1,0	2.2	
															1,1	2.4	
AT9NW	Socket Weld JIS, ASME, DIN	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$	1,6	230			70	82	18 19 23	56	2.75 3.1	0.7 0.9	2.2		0,9	2.0	
															1,0	2.2	
															1,1	2.4	
AT9NF	Flanged JIS, ASME, DIN	$\frac{1}{2}''$ $\frac{3}{4}''$ $1''$					70	82	18 19 23	56	5.7*	0.7 0.9	2.2		2,6	5.7	
															3,4	7.5	
															4,0	8.8	

*On request also available with different face-to-face length

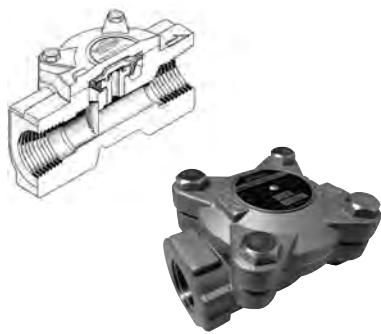
ADC1**ADL1**

Dimensions

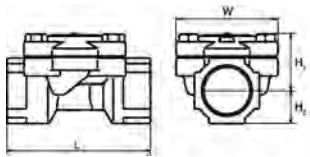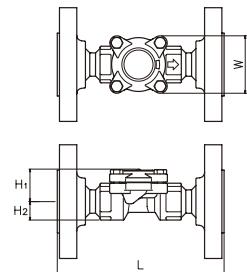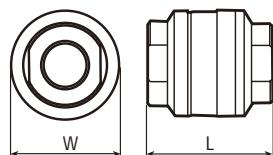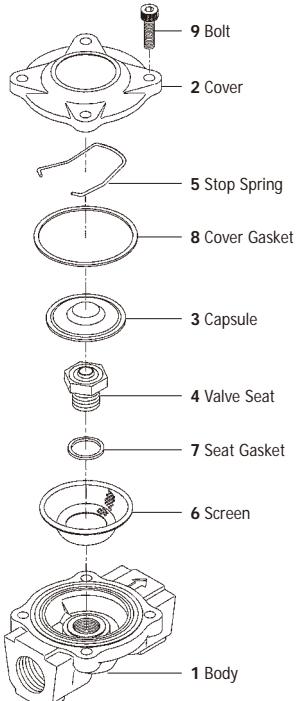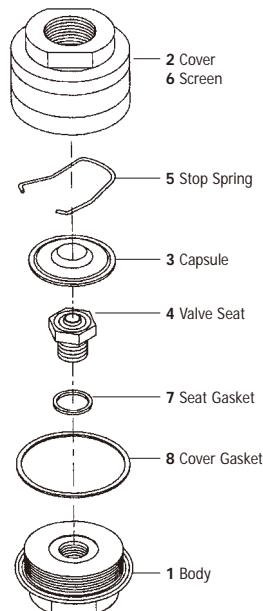ADC1**ADC1-F****ADL1****ADC1****ADL1**

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb
ADC1-21H ADC1-21L	Screwed Rc, NPT	1/4", 3/8"	2,1	305	220	428	65	29	11	53	2.6	1.1	0.4	2.1	Stainless Steel SCS13A	0,4	0.9
		1/2", 3/4"					75	31	17		3.0	1.2	0.7			0,5	1.1
		1"					80	34	21		3.1	1.3	0.8			1,3	2.9
ADC1-21HF ADC1-21LF	Flanged JIS, ASME, DIN	1/2"	2,1	305	220	428	150	31	17	53	5.9	1.2	0.7	2.1	Stainless Steel SCS13A	2,2	4.9
		3/4"					160	34	21		6.3	1.3	0.8			3,1	6.8
		1"															
ADL1-21H ADL1-21L	Screwed Rc, NPT	1/4"	2,1	305	220	428	60			48	2.4			1.9	Stainless Steel SCS13	0,7	1.5
		3/8"															
		1/2"															
		3/4"															
		1"															
ADL1-10C	Screwed Rc, NPT	1/4"	1,0	145	220	428	60			48	2.4			1.9	Stainless Steel SCS13	0,7	1.5
		3/8"															
		1/2"															
		3/4"															
		1"															

AT51

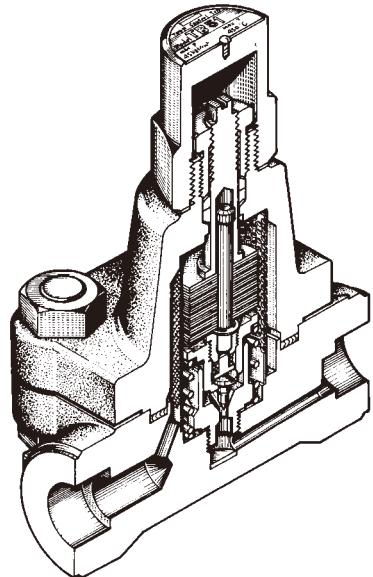


Screwed & Socket Weld



Flanged

Dimensions

AT51 / AT51W

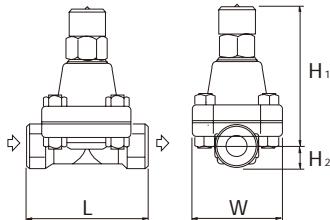

AT51F

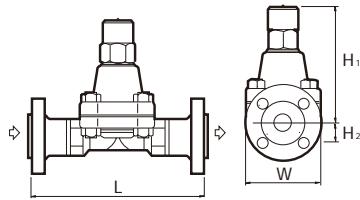


Table 1: Face-to-face dimensions / weights

Model	Size (in)	ASME 600 lb				DIN PN63 / PN100				JIS 63 K / ASME 900 lb			
		mm	in	kg	lb	mm	in	kg	lb	mm	in	kg	lb
AT51F	1/2"	200	7.9	7,3	16.1	210	8.3	9,4	20.7	220	8.7	9,6	21.2
	3/4"	210	8.3	8,5	18.7	230	9.1	11,4	25.1	230	9.1	11,1	24.5
	1"	240	9.4	9,6	21.2	230	9.1	12,5	27.6	240	9.4	12,1	26.7

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material		Weight	
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb		
AT51	Screwed Rc, NPT	1/2" - 1"	4,5	653	425	800	130	155	25	100	5.1	6.1	1.0	3.9	Forged Steel A105		5,7	12.6
			6,5	943														
AT51W	Socket Weld JIS, ASME, DIN	1/2" - 1"	4,5	653											Table 1		Table 1	Table 1
			6,5	943														
AT51F	Flanged JIS, ASME, DIN	1/2" - 1"	4,5	653	Table 1	155	25	100	Table 1	6.1	1.0	3.9						
			6,5	943														

Pressure Reducing Valves

SERIES RE

Pressure Reducing Valves (PRV) are designed for regulating the downstream pressure and maintaining it within certain acceptable limits. Ideally, a PRV should provide constant downstream pressure while delivering the required flow, i.e. the PRV automatically adjusts the steam flow to meet the downstream system demand. Depending on the model, MIYAWAKI's pressure reducing valves are designed for steam, air, gases and liquids. MIYAWAKI is manufacturing three types of PRV:

- Direct acting pressure reducing valves
- Pilot operated pressure reducing valves
- Pressure reducing valves with a downstream pressure sensing line (pulse line)


Operating principle General



Direct Acting PRV

The direct acting PRV has 3 essential elements:

- A Main Valve Unit
- B Pressure Measuring Element (Bellows)
- C Adjust Spring

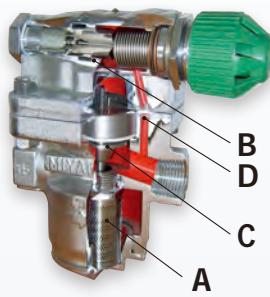

Changes in downstream pressure are sensed by the bellows, which expands or contracts depending on the pressure change. The movement of the bellows will be directly transferred to the spring, which will open or close the main valve, thus keeping the downstream pressure at a certain level.

Pilot Operated PRV

The pilot operated PRV has 4 essential elements:


- A Main Valve Unit
- B Pilot Valve (same structure as the direct-acting PRV)
- C Adjusting Unit (piston and cylinder liner)
- D Downstream pressure sensing line (pulse line)

Changes in downstream pressure are sensed by the pilot valve mechanism (bellows connected with a pilot valve unit) through a signal line D, which connects the pilot valve regulator with the secondary pressure side. Movement of the bellows will open or close the pilot valve, regulating the amount of steam influencing the movement of the piston, which will close or open the main valve, thus keeping downstream pressure on a stable level.

Pilot operated pressure reducing valves are used to improve accuracy and capacity, compared with direct acting pressure regulators. The decision whether to use a direct acting valve or a pilot operated valve depends on the demands of the steam using system.


Operating principle Pilot operated PRV

Inlet Steam Pressure Secondary Steam Pressure Adjusting Steam Pressure

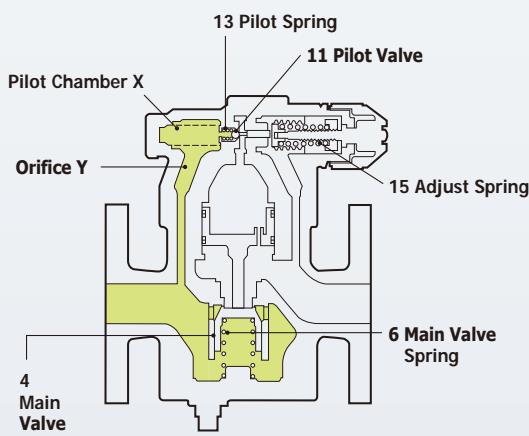


1

Before adjusting the secondary pressure the green handle must be turned clockwise to release the adjust spring (15) until the handle moves freely. In this position the main valve (4) is closed by the force of the spring (6) and the pilot valve (11) is closed by the force of the spring (13). When steam enters the valve, part of the steam enters the pilot chamber (X) through the orifice (Y).

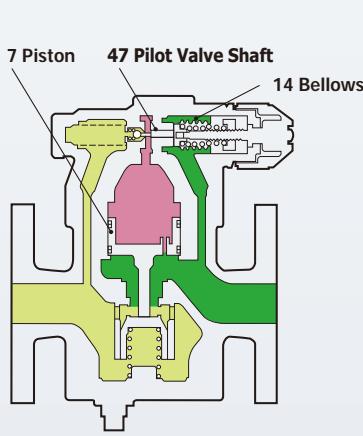

2

To adjust the secondary pressure the handle must be turned counterclockwise. As a result, the adjust spring (15) will be pressed into the bellows (14). The bellows will expand and the pilot valve shaft (47) will open the pilot valve (11). The steam, which has entered the pilot chamber (X) will flow through the pilot valve unit into the chamber above the piston (7). Due to the steam pressure the piston (7) will move downwards and open the main valve (4). Steam will flow towards the secondary side.

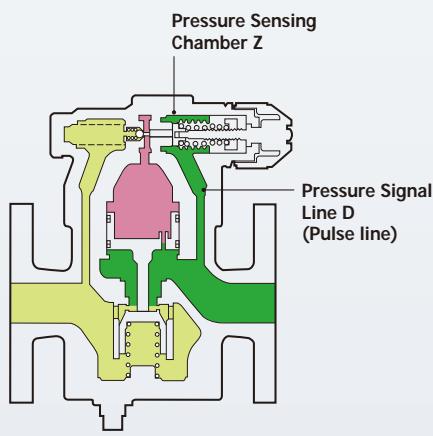


3

Part of the steam, which flows to the secondary side will enter the pressure sensing chamber (Z) through the pressure signal line (D). Due to the pressure influence, the bellows (14) will contract. Depending on the secondary pressure value the force exerted by the bellows and the force exerted by the adjust spring (15) will be balanced and the opening degree of the pilot valve (11) will be adjusted, thus regulating the amount of steam flowing through the pilot valve to the piston. Consequently, the opening degree of the main valve (4) will be also adjusted to regulate the steam flow in the direction of the secondary side maintaining a stable steam flow and steam pressure on the secondary side.


Pressure Reducing Valves

SERIES RE Steam



RE1

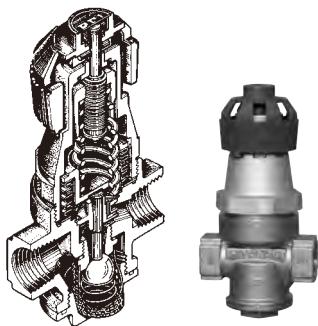



RE2

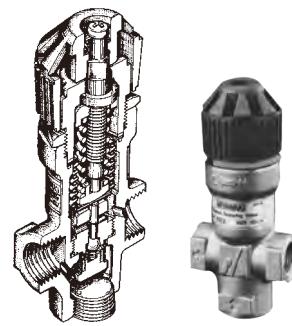



Capacity Charts RE1, RE1-4

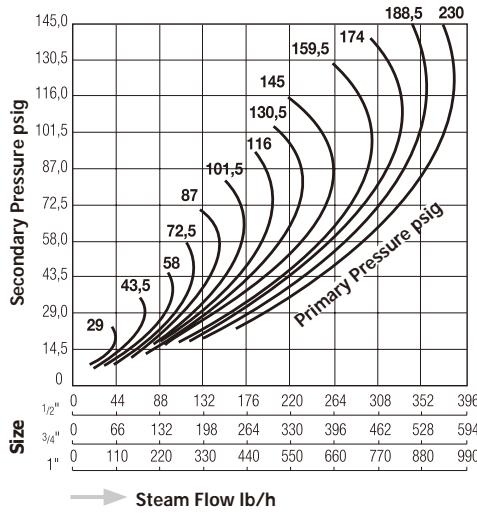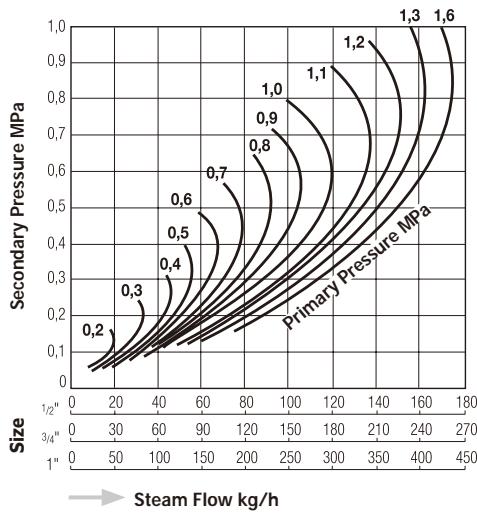


Capacity Charts RE1-2

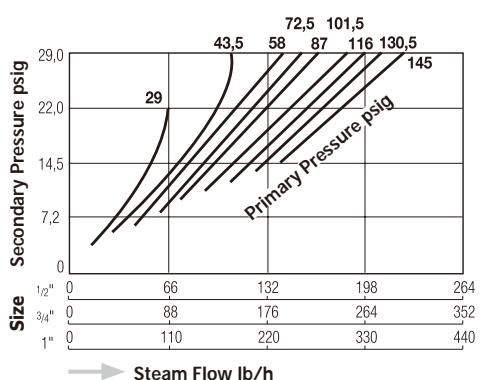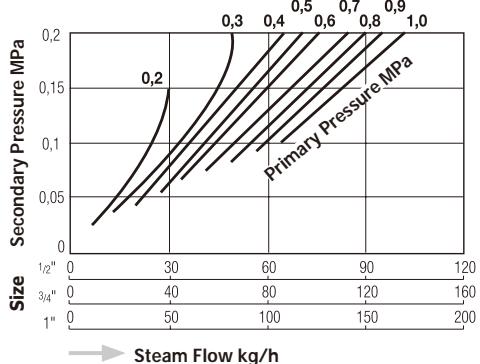


Capacity Charts RE2

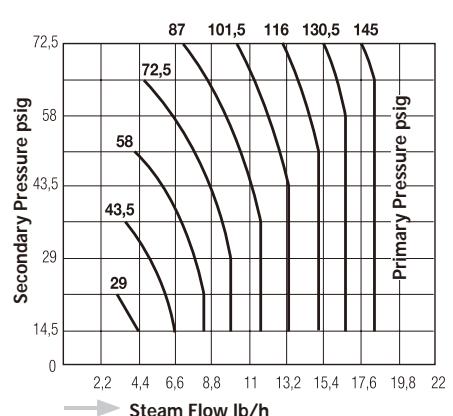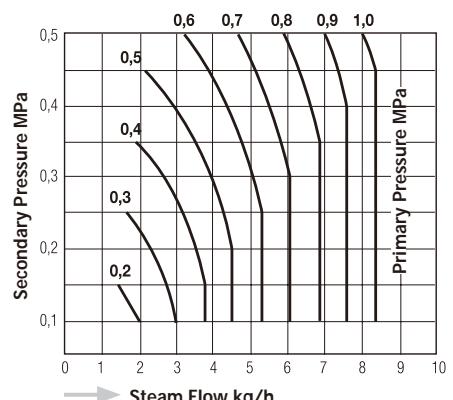

Dimensions RE1

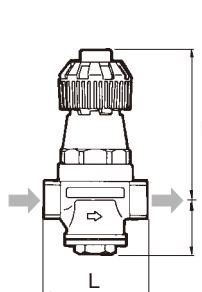


Dimensions RE2

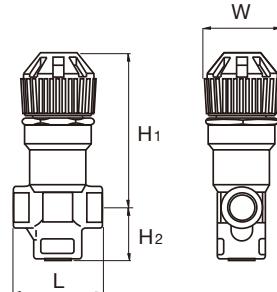


Cv Values	Size (in)	RE1 & RE1-4		RE1-2		Kvs Values	Size (in)	RE1 & RE1-4		RE1-2	
		1/2"	1,2	1/2"	1,9			1/2"	1,0	1,6	
		3/4"	1,9	3/4"	1,9			1"	1,6	1,6	
	1"	3,2	2,1				1"	2,8	1,8		

Model	Connection	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Operating Temperature		Dimensions (mm)		Dimensions (in)		Body Material	Weight						
			MPa	psig	MPa	psig		°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb		
RE1	Screwed Rc, NPT	1/2"	0,2 - 1,6	29 - 230	0,05 - 1,0	7,2 - 145	10 : 1	204	399	80	137	46	3,2	5,4	1,8	2,6	Brass	1,4	3,1		
		3/4"								90	144	58	3,5	5,7	2,3			1,6	3,5		
		1"								105	144	58	4,1	5,7	2,3			1,9	4,2		
RE1-4		1/2"	0,2 - 1,0	29 - 145	0,05 - 0,4	7,2 - 58	10 : 1	204	399	80	137	46	3,2	5,4	1,8	2,6		1,4	3,1		
		3/4"								90	144	58	3,5	5,7	2,3			1,6	3,5		
		1"								105	144	58	4,1	5,7	2,3			1,9	4,2		
RE1-2		1/2"	0,2 - 1,0	29 - 145	0,02 - 0,2	2,9 - 29	10 : 1	204	399	80	137	46	3,2	5,4	1,8	2,6		1,4	3,1		
		3/4"								90	144	58	3,5	5,7	2,3			1,6	3,5		
		1"								105	144	58	4,1	5,7	2,3			1,9	4,2		
RE2		3/8"	0,2 - 1,0	29 - 145	0,1 - 0,5	14 - 72	10 : 1	184	363	50	89	31	43	2,0	3,5	1,2	1,7		0,56	1,2	

REC1

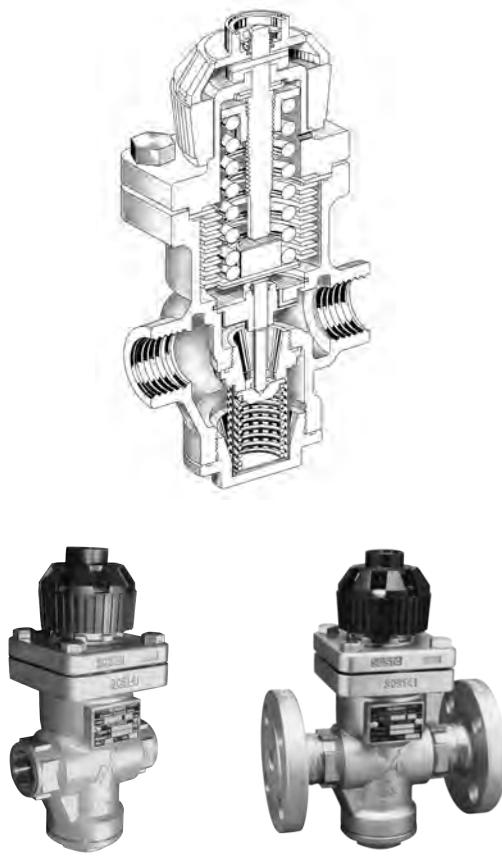


Capacity Chart REC1

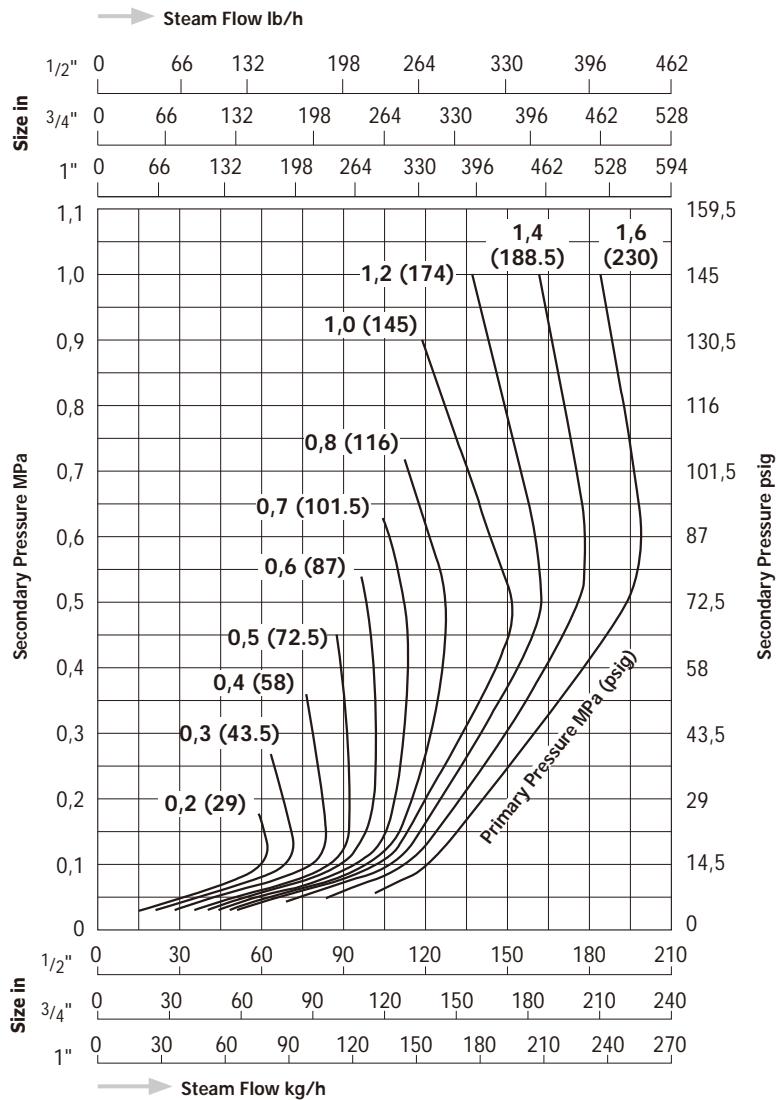


Minimum Differential Pressure:
more than 10 % of Operating Pressure

Body Material:
Stainless Steel SCS14

Dimensions REC1 - Screwed




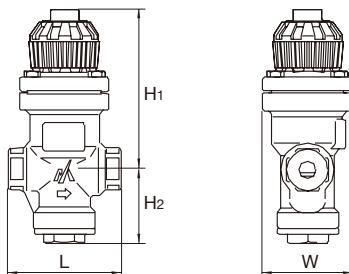


Dimensions REC1 - Flanged

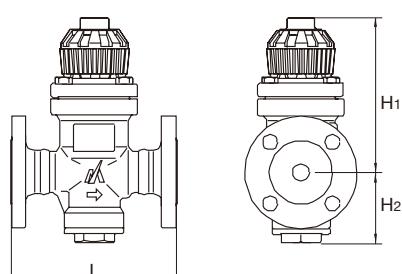


	Size (in)	REC1
Cv Values	1/2"	3,8
	3/4"	4,0
	1"	4,0
Kvs Values	1/2"	3,3
	3/4"	3,4
	1"	3,4

Model	Connections	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Operating Temperature		Dimensions (mm)			Dimensions (in)			Weight					
			MPa	psig	MPa	psig		°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb		
REC1-2	Screwed Rc, NPT, Rp	1/2" - 1"	0,2 - 1,6	29 - 230	0,02 - 0,2	2,9 - 29	30 : 1	220	428	96	138	63	78	3,8	5,4	2,5	3,1	2,9	6,4		
REC1-6		1/2" - 1"	0,2 - 1,6	29 - 230	0,18 - 0,6	26 - 87	8,9 : 1			150	138	63	78	5,9	5,4	2,5	3,1	2,8	6,2		
REC1-10		1/2" - 1"	0,6 - 1,6	87 - 230	0,54 - 1,0	78 - 145	3 : 1			160	138	63	78	6,3				2,8	6,2		
REC1-2F	Flanged JIS, ASME, DIN	1/2"	0,2 - 1,6	29 - 230	0,02 - 0,2	2,9 - 29	30 : 1			150	138	63	78	5,9	5,4	2,5	3,1	4,5	9,9		
REC1-6F		3/4"								160				6,3				5,1	11,2		
REC1-10F		1"								150	138	63	78	5,9	5,4	2,5	3,1	5,9	13		
		1/2"	0,6 - 1,6	87 - 230	0,54 - 1,0	78 - 145	3 : 1			160	6,3	4,5	9,9								
		3/4"								150	138	63	78	5,9				5,1	11,2		
		1"								160	6,3	5,9	13								

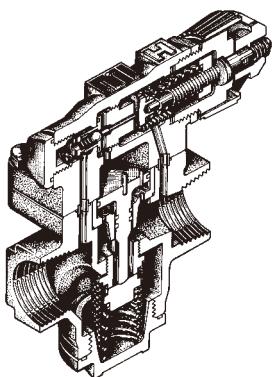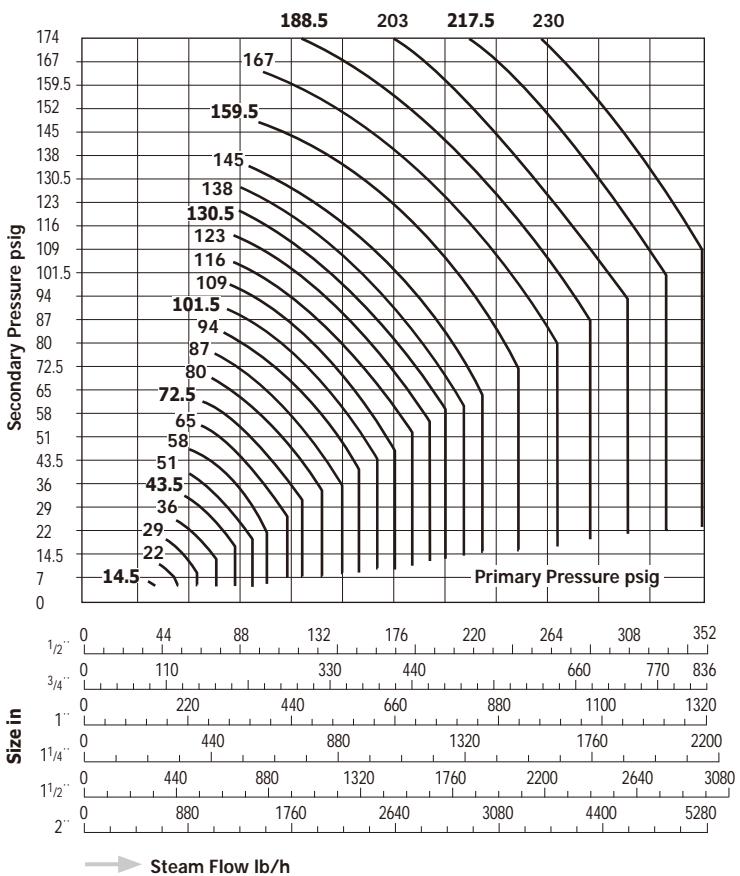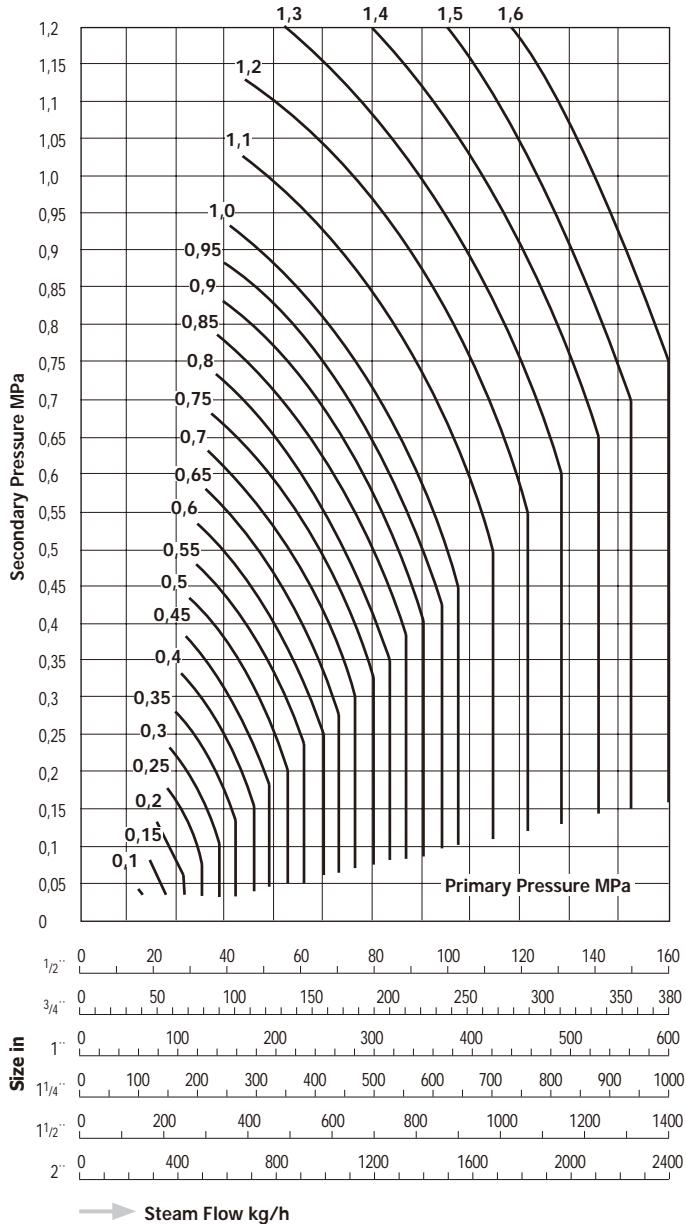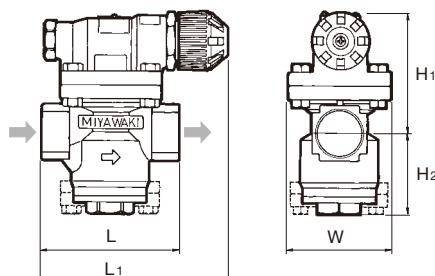RE3**Body Material:** Brass C3771**Capacity Charts RE3****Dimensions RE3**



Model	Connection	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Oper. Temperature	Dimensions (mm)				Dimensions (in)				Weight		Values			
			MPa	psig	MPa	psig			L	L1	H1	H2	W	L	L1	H1	H2	W	kg	lb	Cv	Kvs
RE3	Screwed Rc, NPT	1/2"	0,1 - 1,6	14.5 - 230	0,03 - 1,2	4.4 - 174	20 : 1	220 428	90	127				3.5	5.0				2,8	6.2	0,8	0,7
		3/4"							95	130	87	58	74	3.7	5.1	3.4	2.3	2.9			1,9	1,6
		1"							100	132				3.9	5.2				2,9	6.4	3,0	2,6
		1 1/4"							130	155	111	73	96	5.1	6.1	4.4	2.9	3.8	6,2	13.6	4,9	4,2
		1 1/2"							140	157	121	79	110	5.5	6.2	4.8	3.1	4.3	8,2	18.0	12,0	10,3
		2"																				

RE10N

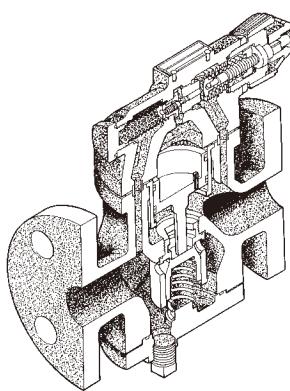


Body Material: Ductile Cast Iron FCD450

Capacity Charts RE10N

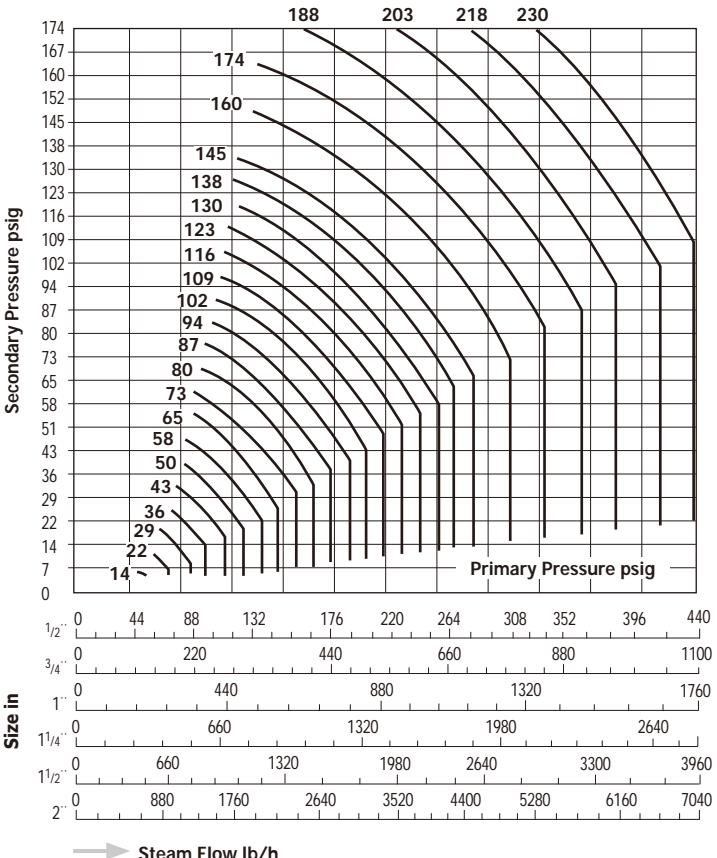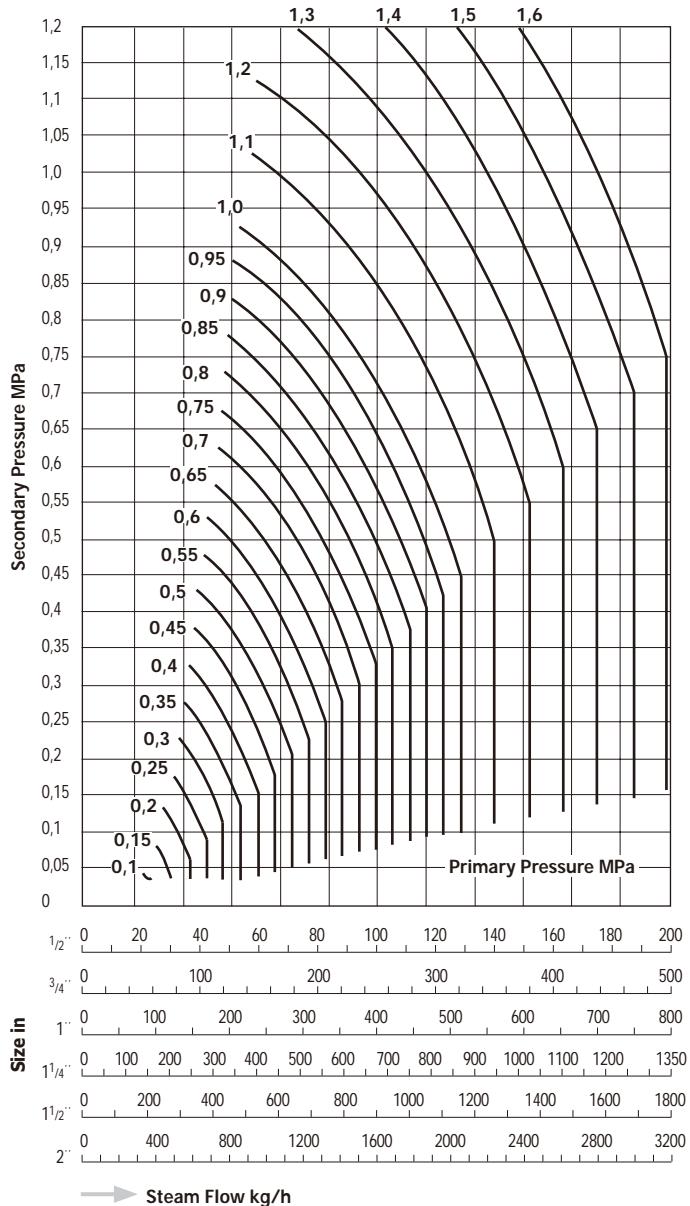

Dimensions RE10N

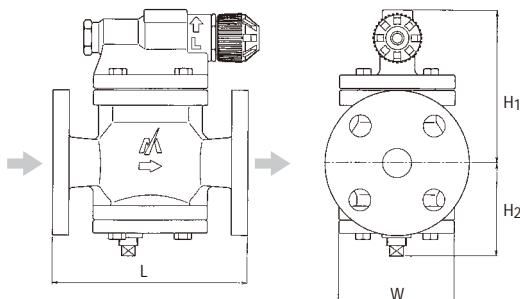

Model	Connection	Size (in)	Operating Pressure (Primary)		Secondary Pressure		Max. Red. Pressure Ratio	Max. Operating Temperature	Dimensions (mm)				Dimensions (in)				Weight		Values			
			MPa	psig	MPa	psig			°C	°F	L	H1	H2	W	L	H1	H2	W	kg	lb	Cv	Kvs
RE10N	Flanged JIS, ASME, DIN	1/2"							160		6.3								7,1	15.7	1,0	0,9
		3/4"							133		5.2								7,4	16.3	2,5	2,2
		1"							80		3.1								8,5	18.7	4,0	3,4
		1 1/4"							100		3.9								14,2	31.3	6,5	5,6
		1 1/2"							6.7										14,3	31.5	9,0	7,7
		2"							220	428	7.9								15,6	34.4	16,0	13,8


RE20

REH20


REC20

The model **RE20** is a direct acting pressure reducing valve designed for use of steam. The valve provides a constant downstream pressure at a stable given inlet pressure and constant running flowrates. Changes in the upstream pressure and fluctuating steam consumption on the secondary side will result in variations in downstream pressure. The valve is not designed for dead-end services. Due to carefully selected springs a wide range of pressure applications is available. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. As option the valves can be equipped with a pressure gauge on the valve body.


Maximum pressure reduction ratio: 25:1

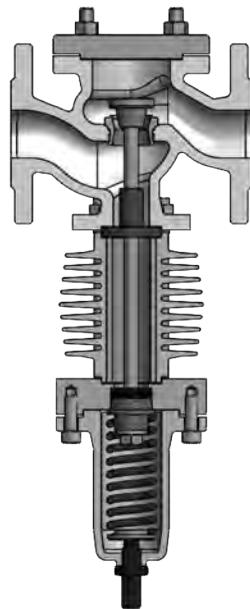

Size: DN 15 – 100

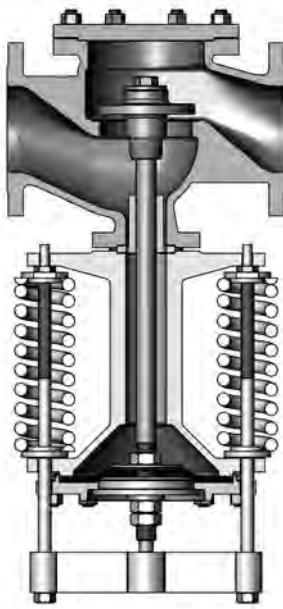

Size: DN 125 – 200

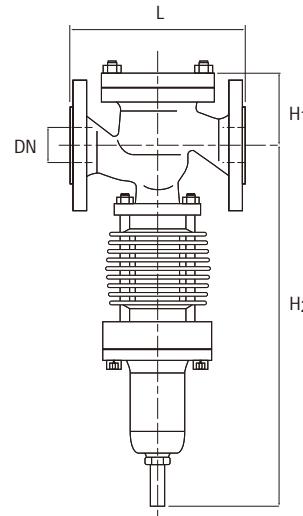


RE20L

REH20L


REC20L

The model **RE20L** is a pressure reducing valve with a downstream pressure sensing line (pulse line) designed for use of steam. The valve provides a precise downstream pressure even at changing inlet pressures. Due to carefully selected springs a wide range of pressure applications is available. The valve is very well suited to intermittent or fluctuating loads at the secondary side. It closes securely when the load on the secondary side will be zero. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. As option the valves can be equipped with a pressure gauge on the valve body.


Maximum pressure reduction ratio: 25:1

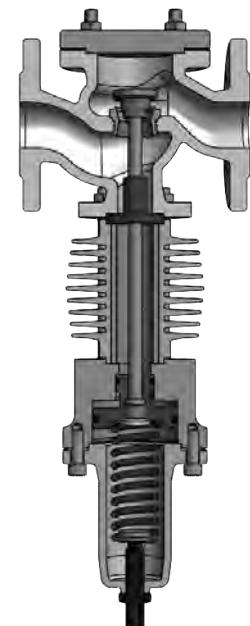

Size: DN 15 – 100

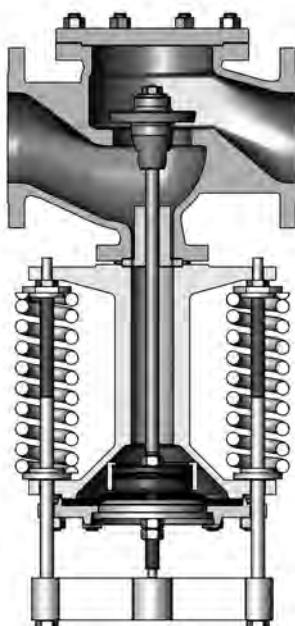

Size: DN 125 – 200

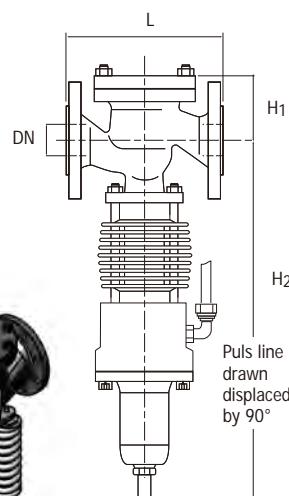


REA20

REAH20

REAC20

The model **REA20** is a direct acting pressure reducing valve designed for use of compressible media, such as air and various gases and for incompressible media such as water, oil and others. The valve provides a constant downstream pressure at a stable given inlet pressure and constant running flowrates. Changes in the upstream pressure and fluctuating consumption on the secondary side will result in variations in downstream pressure. The valve is not designed for dead-end services. Due to carefully selected springs a wide range of pressure applications is available. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. Depending on the medium the valve can be equipped with soft sealing or metal sealing valves/seats. As option the valves can be equipped with a pressure gauge on the valve body.


Maximum pressure reduction ratio: 25:1

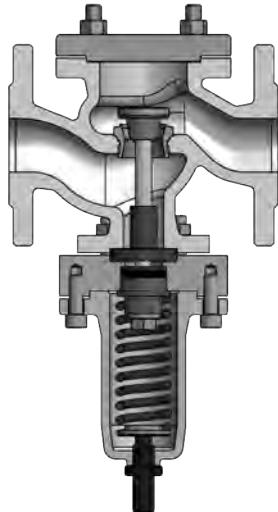

Size: DN 15 – 100



Size: DN 125 – 200

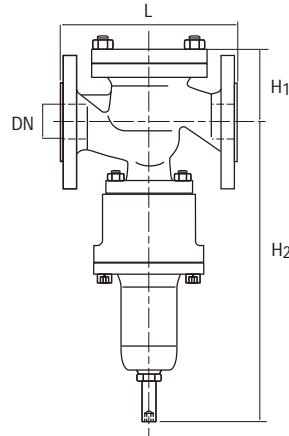


REA20L

REAH20L


REAC20L

The model **REA20L** is a pressure reducing valve designed for use of compressible media, such as air and various gases and for incompressible media such as water, oil and others. Due to the use of a downstream pressure sensing line (pulse line) the valve provides a constant accurate downstream pressure. Carefully selected springs secure a wide range of downstream pressure applications. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. The valve is designed for dead-end services. In case of zero consumption on the secondary side the valve closes reliably. Depending on the medium the valve can be equipped with soft sealing or metal sealing valves/seats. As option the valves can be equipped with pressure gauges.

Maximum pressure reduction ratio: 25:1

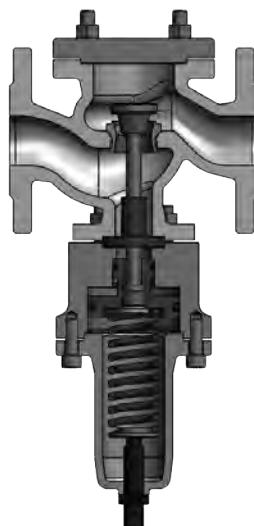

Size: DN 15 – 100

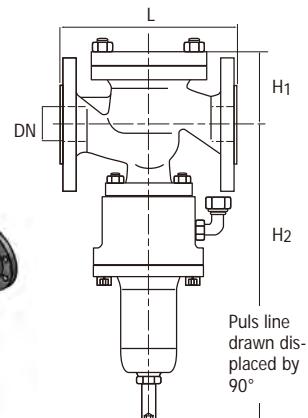

- Usable for the following gases :

Acetylene, Ammonia, Argon, Carbon dioxide, Carbon monoxide, Chlorine, Coal gas, Hydrogen, Ethylene, Helium, Methane, Nitrogen, Oxygen*, Sulphur dioxide

Others may be possible as well. Please ask MIYAWAKI Inc. or an authorized representative for more detail.


- Special cleaning to make the product oil-free / grease-free is available at an additional cost.

* Special cleaning is mandatory for oxygen applications.



Pressure Reducing Valves

SERIES RE Spare Parts


RE1

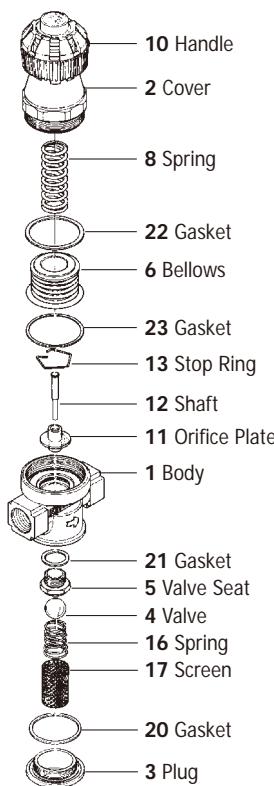


REC1

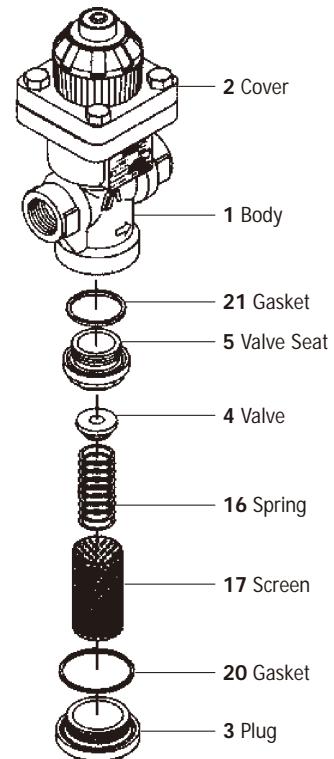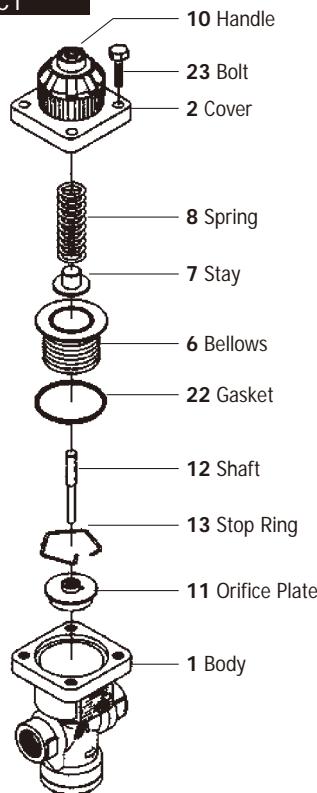

RE3

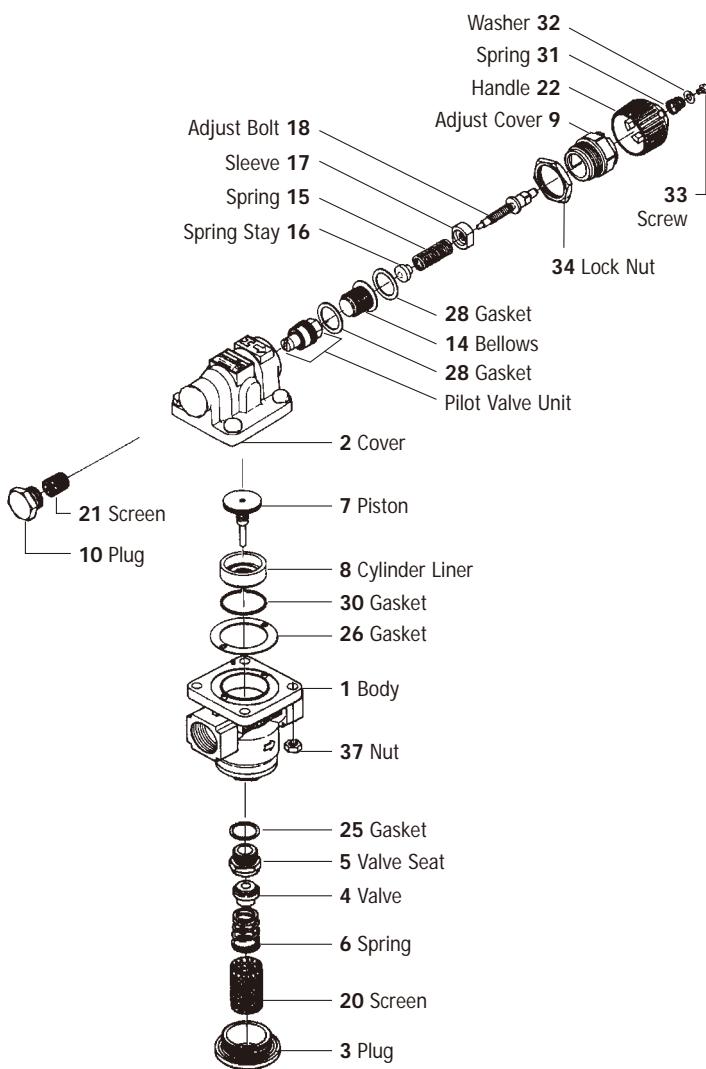

RE10N

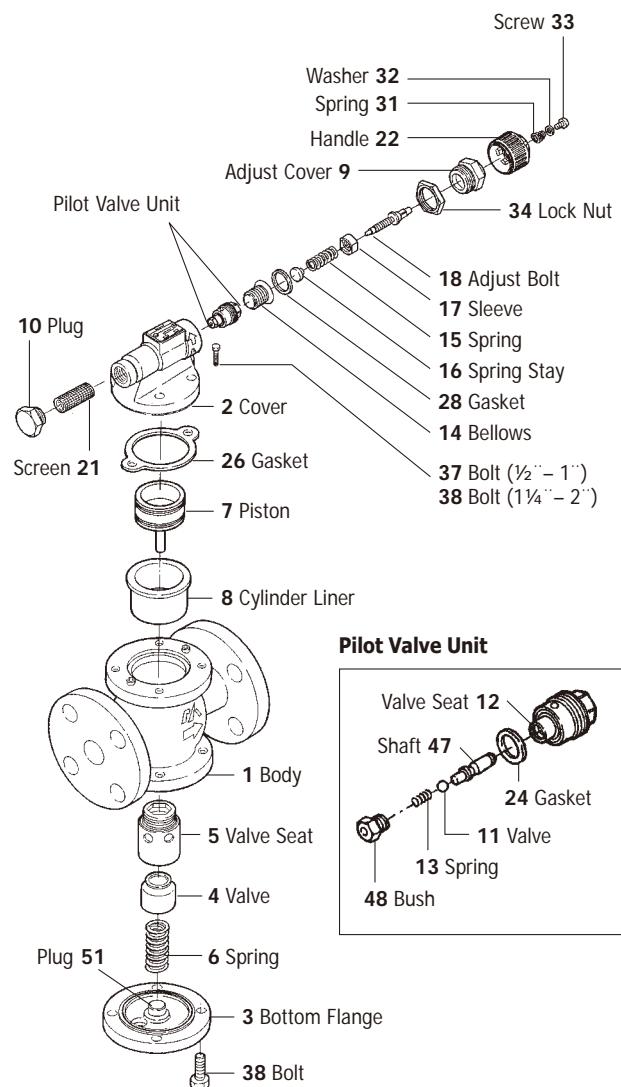

Steam-Water-Mixing Valve

SERIES MX

MX1N

Features

1. Temperature is thermostatically controlled.
2. Can be installed where steam and cold water are available.
3. Produces hot water quickly and efficiently.
4. Efficient energy saving.
5. Precise thermostatic control.
6. Inline repairability.
7. Nickel plated finish.




Suitable for


Washing down floors, vehicles, vats, jacketed vessels, backflushing filters, washing out vessels and other equipment in the dairy, brewery, food, chemical and soap manufacturing industries and wherever hot water is required economically.

Operating principle


Cold water Hot water Steam

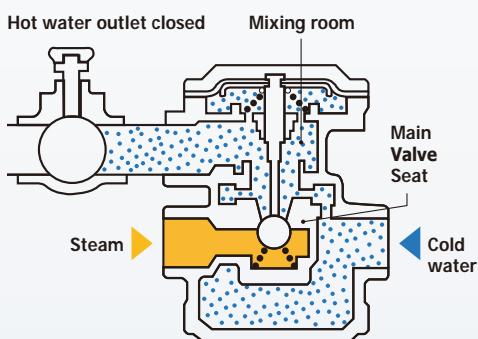

1

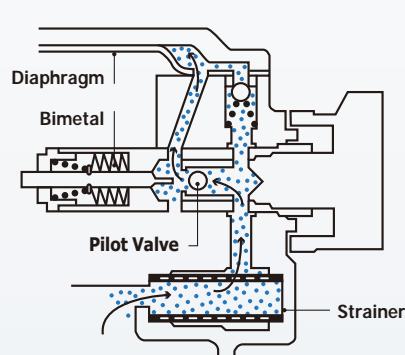

2

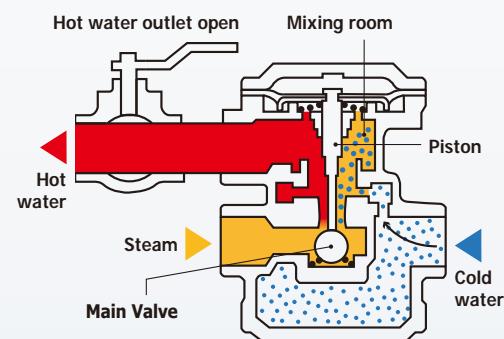


3

The cold water occupies the lower part of the body completely, flows through a hole next to the seat of the main valve into the mixing room and occupies it up to the hot water outlet. The main valve is closed. The steam can't enter the mixing room.


When you open the hot water outlet the cold water flows from the mixing room to the hot water outlet. During this process one part of the cold water flows through the strainer and runs behind the pilot valve (which is connected with the bimetal unit) into the space above the diaphragm.

The water pressure in the space above the diaphragm increases and pushes the diaphragm and the connected piston downwards. Consequently, the main valve opens and the steam flows into the mixing room and mixes with the cold water. The hot water flows to the hot water outlet.

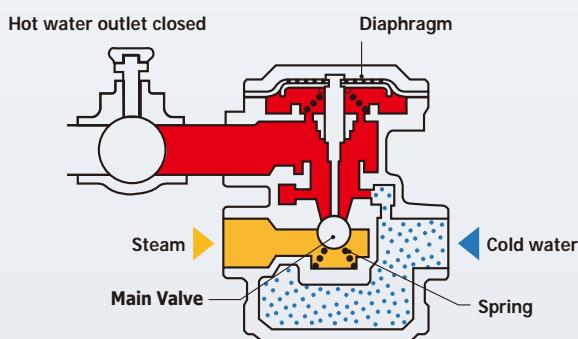

4


When the hot water outlet is being closed the pressure in the mixing room rises, the pressure on the diaphragm increases and the diaphragm returns to its original position. The main valve closes due to the pressure of the spring and the steam.

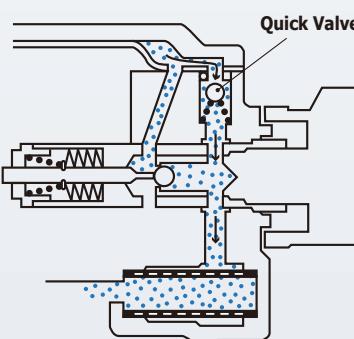


5

The pressure above the diaphragm is equalized by the quick valve. The pilot valve is closed.

MX1N Steam-Water-Mixing Valve

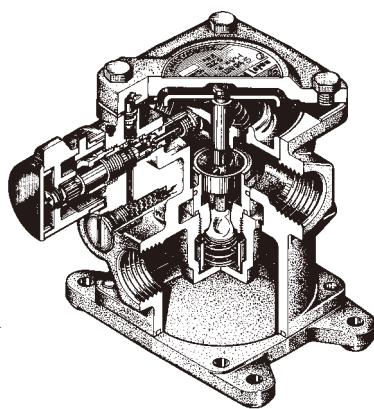

Dimensions

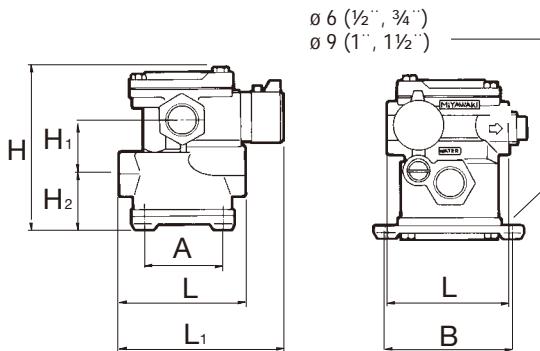

Connection	Size	Max. Operating Pressure				Min. Operating Pressure				Max. Temperature		Max. Pressure Ratio		Max. Temperature		Dimensions mm (in)							Weight	
		Steam		Water		Steam		Water		Steam		steam : water	(water : steam)	Hot Water		L	L1	H	H1	H2	A	B	kg	lb
		MPa	psig	MPa	psig	MPa	psig	MPa	psig	°C	°F			°C	°F									
Screwed Rc, NPT	1/2"	0,7	101.5	0,7	101.5	0,03	5	0,03	5	185	365	3 : 1	93	199	100 (3.9)	138 (5.4)	134 (5.3)	43 (1.7)	47 (1.9)	62 (2.4)	102 (4.0)	3,9	8.6	
	3/4"														140 (5.5)	179 (7.0)	168 (6.6)	57 (2.2)	51 (2.0)	86 (3.4)	147 (5.8)	8,6	18.9	
	1"														160 (6.3)	189 (7.4)	197 (7.8)	70 (2.8)	60 (2.4)	86 (3.4)	147 (5.8)	14,1	31.0	
	1 1/2"	0,5	72.5	0,5	72.5																			

Body Material: Brass C3771 (JIS); PMA = 1,0 MPa (145 psig), TMA = 185°C (365°F)

Hot Water Capacity MX1N

Ratio Steam Pressure : Cold Water Pressure = 1 : 1, Cold Water Temperature 15°C


Size (in)	Pressure		Hot Water Flow Amount (l/min)											
			40°C		50°C		60°C		70°C		80°C		90°C	
	MPa	psig	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1/2"	0,1	14.5	3	12	3	12	3	13	5	13	5	11	5	10
	0,2	29.0	3	20	3	21	3	21	5	20	5	17	10	14
	0,3	43.5	6	25	6	25	6	26	9	26	9	22	13	19
	0,4	58.0	6	29	6	29	6	29	12	30	12	28	17	24
	0,5	72.5	7	32	7	32	8	33	13	34	18	34	29	29
	0,6	87.0	7	35	7	36	16	36	17	37	27	37	34	34
	0,7	101.5	8	38	9	38	21	39	21	40	37	40	38	38
3/4"	0,1	14.5	5	22	5	23	5	20	8	17	8	14	9	12
	0,2	29.0	5	32	5	32	5	31	8	25	8	21	13	18
	0,3	43.5	8	39	8	39	8	40	10	34	10	28	25	25
	0,4	58.0	9	45	9	45	9	46	14	42	20	36	31	31
	0,5	72.5	11	50	11	51	11	52	15	51	23	43	37	37
	0,6	87.0	12	55	12	55	23	56	23	57	42	50	43	43
	0,7	101.5	14	59	15	60	44	61	45	62	56	56	49	49
1"	0,1	14.5	30	54	30	54	29	47	23	38	20	32	17	28
	0,2	29.0	38	76	39	77	48	70	37	57	31	49	27	42
	0,3	43.5	48	93	48	94	65	94	52	77	44	65	38	56
	0,4	58.0	54	107	55	109	66	111	67	97	57	82	49	71
	0,5	72.5	60	120	66	122	67	124	82	116	69	98	60	85
	0,6	87.0	66	131	67	133	68	135	97	136	82	115	71	100
	0,7	101.5	71	142	72	144	73	146	107	149	93	130	81	112
1 1/2"	0,1	14.5	91	140	83	116	64	90	53	74	45	63	39	54
	0,2	29.0	116	197	137	175	100	136	82	112	69	94	60	82
	0,3	43.5	136	242	170	235	136	183	112	149	94	126	82	110
	0,4	58.0	153	279	170	284	172	229	141	188	119	159	103	138
	0,5	72.5	171	312	173	317	210	276	172	226	146	191	126	166

Max. Temperature of hot water – Ratio Steam Pressure 1 : 1



1/2"	93°C	3/4"	93°C	1"	93°C	1 1/2"	93°C
------	------	------	------	----	------	--------	------

Please, look at our Website www.miawaki.net (Products/Steam Water Mixing Valves) for more detailed flow charts containing hot water flow rates of the MX1N. If you require further technical details, please ask for our technical leaflet on Steam Water Mixing Valves.



MX1N

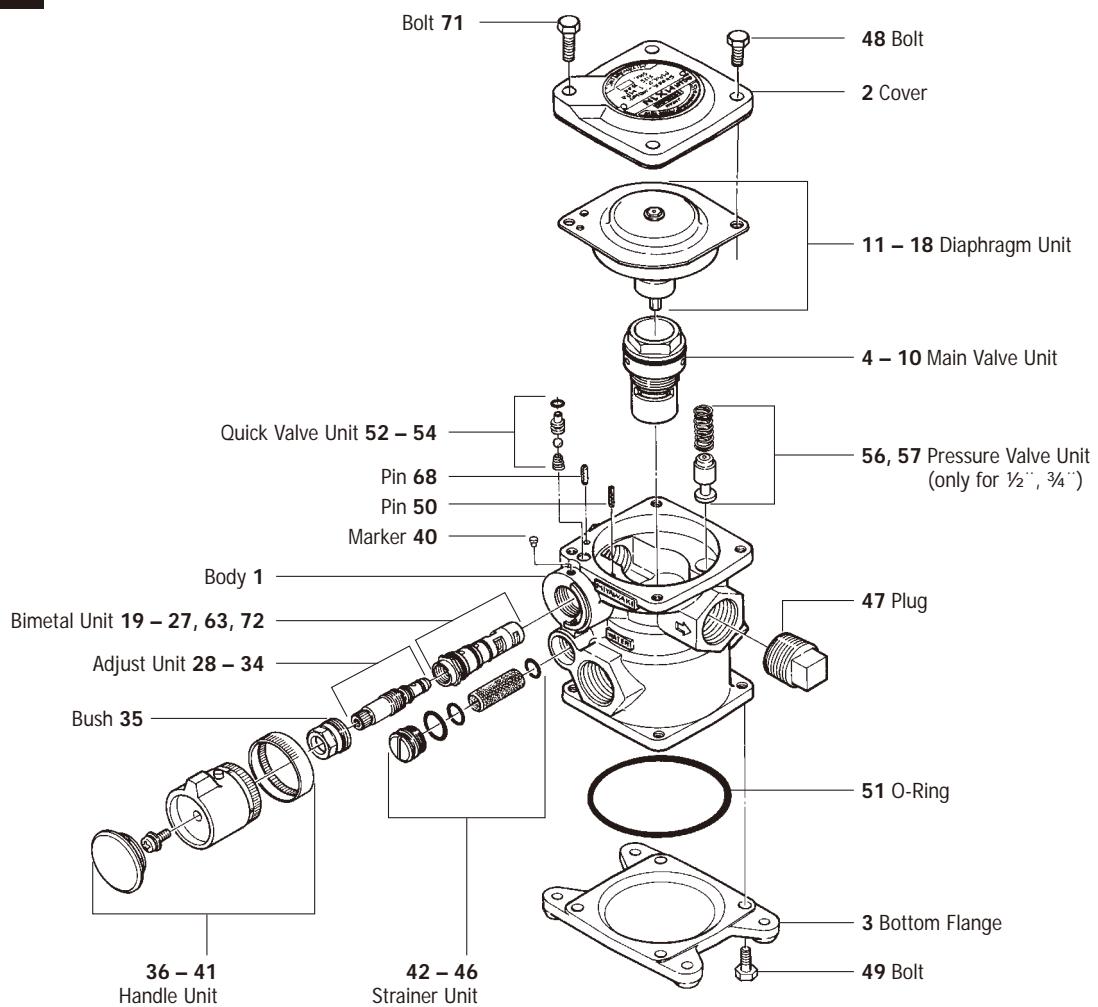

MX1N

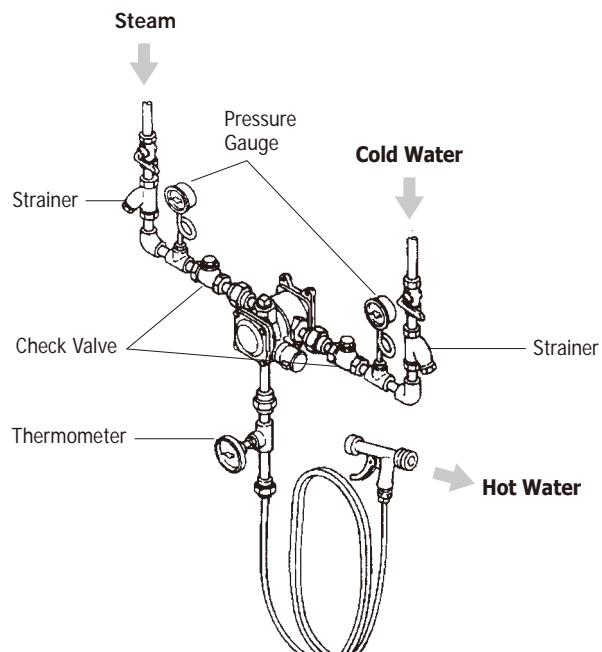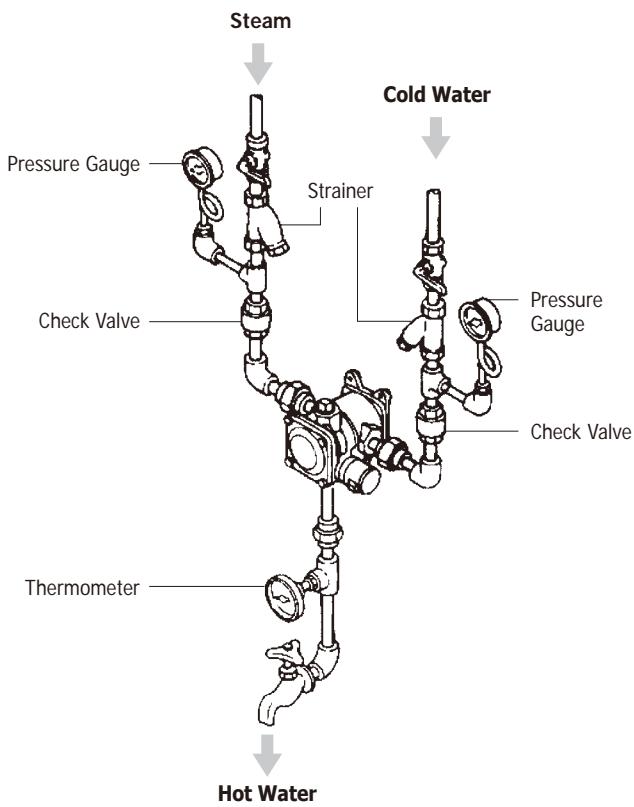Installation Examples

MK Water Gun




MK**MK-2****MK-82****Features**

1. Trigger operated water gun. Front trigger or rear trigger available
2. Perfect water consumption control
3. One-handed mode with either variable spray or direct jet
4. Automatic and immediate shut-off when the trigger is released

Suitable for**MK2** is suitable for most industrial applications**MK-MV** is recommended for use with Steam-Water-Mixing Valves

Model	Material	Rubber Cover	Trigger	Orifice Size		Max. Pressure
				in	mm	
MK-2	Gunmetal or Stainless Steel	Black or White	rear	5/16"	7,9	0,7
MK-OH				7/16"	11,1	
MK-MV				9/16"	14,3	
MK-78	Gunmetal	Black or White	front	5/16"	7,9	1,4
MK-80				7/16"	11,1	
MK-82				9/16"	14,3	

Pressure		Orifice Size			Orifice Size			
		5/16"	7/16"	9/16"	5/16"	7/16"	9/16"	
MPa	psig	l/min					GPM	
0,035	5.0	3,2	13,5	15,0	0,84	3,56	3,96	
0,07	10,2	5,6	20,0	21,0	1,48	5,28	5,54	
0,1	14,5	7,0	22,5	24,0	1,85	5,94	6,34	
0,2	29,0	10,0	25,0	36,0	2,64	6,60	9,50	
0,3	43,5	12,5	32,0	47,0	3,30	8,45	12,41	
0,35	50,8	14,5	37,0	52,0	3,83	9,77	13,73	
0,4	58,0	16,0	38,0	55,0	4,22	10,03	14,52	
0,5	72,5	18,0	40,0	60,0	4,75	10,56	15,84	
0,6	87,0	20,5	42,0	65,0	5,41	11,09	17,16	
0,7	101,5	22,3	44,0	69,0	5,89	11,62	18,22	
1,0	145,0	27,5	51,0	-	7,26	13,46	-	
1,5	217,5	35,0	62,0	-	9,24	16,37	-	
2,0	290,0	43,0	74,0	-	11,35	19,54	-	
2,5	362,5	50,5	85,0	-	13,33	22,44	-	

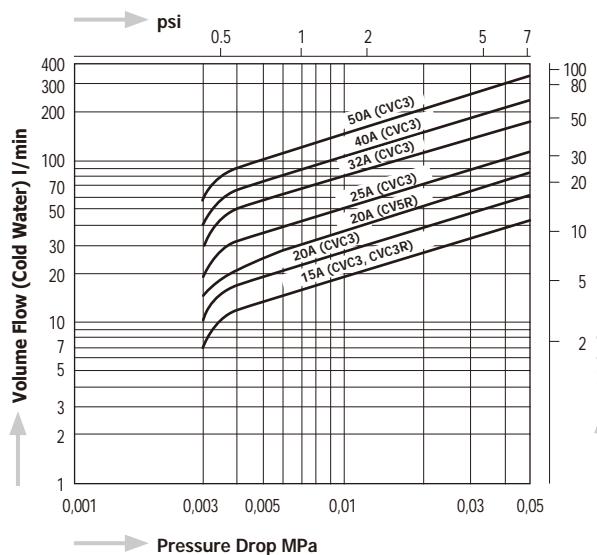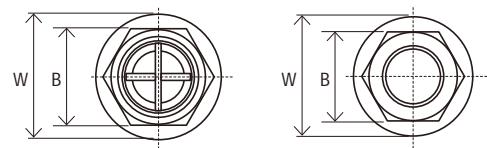
CVC3, CVC3R, CV5R Check Valve**CVC3, CVC3R, CV5R****CVC3, CVC3R****CV5R****Pressure Drop Chart****Dimensions****CVC3, CVC3R****CV5R**

Model	Connections	Size	Max. Operating Pressure		Opening Pressure		Max. Operating Temperature	Dimensions (mm)			Dimensions (in)			Body Material	Weight		
			MPa	psig	MPa	psig		L	W	B	L	W	B		kg	lb	
CVC3	Screwed Rc, NPT	1/2"	2,1	305	0,003	0,44	220	428	48	35	27	1,9	1,4	1,1	Stainless Steel SCS13A	0,2	0,44
		3/4"							61	43	33	2,4	1,7	1,3		0,3	0,66
		1"							73	54	41	2,9	2,1	1,6		0,6	1,32
		1 1/4"							80,5	62	50	3,2	2,4	2,0		0,8	1,76
		1 1/2"							87	75	58	3,4	3,0	2,3		1,2	2,64
		2"							100	90	72	3,9	3,5	2,8		1,8	3,96
CVC3R	Screwed Rc, NPT	1/2"	2,1	305	0,003	0,44	80	176	48	35	27	1,9	1,4	1,1	SCS13A	0,2	0,44
CV5R	Screwed Rc, NPT	3/4"	1,6	230	0,003	0,44	80	176	60	46	34	2,4	1,8	1,3	SCS13A	0,3	0,66


Y




Dimensions YM1



YSF-F



YSF-W




Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Mesh	Dimensions (mm)		Dimensions (in)		Body Material	Weight	
			MPa	psig	°C	°F		L	H	L	H		kg	lb
YM1	Screwed Rc, NPT	1/2"	2,0	290	220	428	60	75	55	3.0	2.2	Ductile Cast Iron	0,5	1.1
		3/4"						90	70	3.5	2.8		0,9	2.0
		1"						110	85	4.3	3.3		1,4	3.1
YSF-F	Flanged JIS, ASME, DIN	1/2"	4,9	710	425	797	60	230	125	9.1	4.9	Forged Steel A105	7,0	15.4
		3/4"-1"						310	170	12.2	6.7		8,0	17.6
		1 1/4"										Forged Steel S25C	16,0	35.3
		1 1/2"-2"											17,0	37.5
YSF-W	Socket Weld JIS, ASME, DIN	1/2"-1"	4,9	710	425	797	60	140	125	5.5	4.9	Forged Steel A105	5,0	11.0
		1 1/4"-2"						190	170	7.5	6.7	Forged Steel S25C	9,5	20.9

Screwed (NPT) connection is available as special design.**For more details, please contact MIYAWAKI Inc, or an authorized representative.**


CV11, CVU15



Capacity Chart CVU15

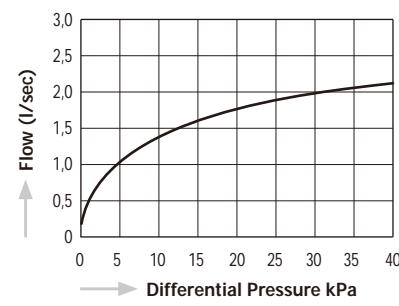

Vacuum Breaker CV11, CVU15

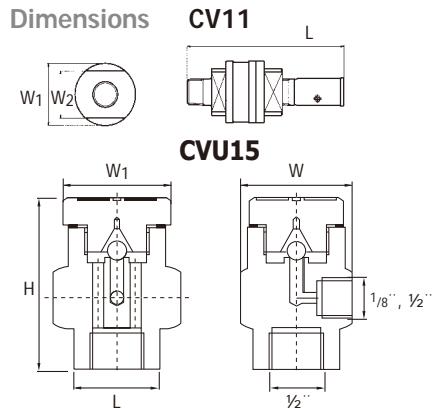

Model	Connections	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight			
			MPa	psig	°C	°F	L	H	W	W1	W2	L	H	W	W1	W2	kg	lb	
CV11	Male thread R	1/2"	0,9	130	150	302	130			50	38	5.1			2.0	1.5	Stainless Steel SUS304	0,8	1.8
		3/4"					135					5.3							
		1"					135					5.3							
CVU15	System connection	Air inlet connection	2,1	305	450	842	55			36		1.26	2.17		1.61	1.42	Stainless Steel AISI 304 (DIN 1.4301)	0,44	0.97
	1/2" Screwed (BSP, BSPT, NPT)	1/8", 1/2" Screwed (BSP, BSPT, NPT)					70					2.75						0,55	1.21

Anti-Freezing Valve F1

F1


Features

1. Easy installation: compact in size
2. No adjustment
3. Easy maintenance


Suitable for

Discharge of remaining condensate out of steam traps and pipe lines


Capacity Chart F1

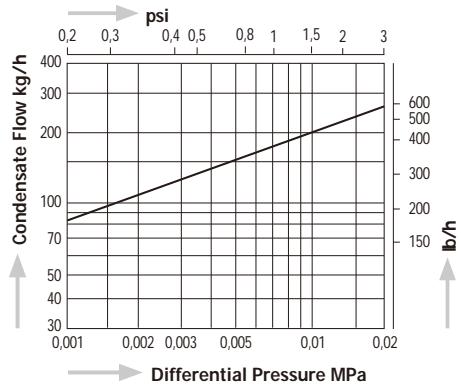

Dimensions F1B

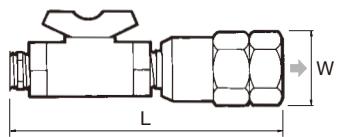


F1



Model	Connection	Size	Max. Operating Pressure		Working Pressure				Max. Operating Temperature		Dimensions (mm)		Dimensions (in)		Body Material	Weight		
			Opening		Closing		Temperature		Dimensions (in)		Dimensions (in)		Dimensions (in)			kg	lb	
			MPa	psig	MPa	psig	MPa	psig	°C	°F	L	W	L	W				
F1B	Screwed Rc, NPT	1/4"	0,98	142	0,01 - 0,04	1,5 - 5,8	0,02 - 0,05	2,9 - 7,3	220	428	113		4,4		Brass C3604	0,19	0,42	
		3/8"									119	27	4,7	1,1		0,23	0,51	
F1		1/4", 3/8"	1,6	230					52				2,0			0,13	0,29	

TS1, T3 Sight Glass**TS1**

Dimensions TS1

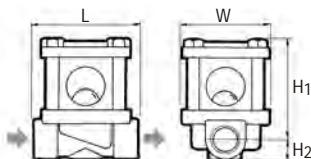
**T3****Features**

To check operation of steam traps


Suitable for

Steam and liquid lines


T3

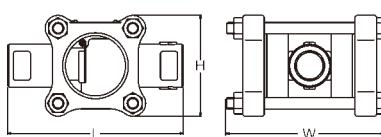


T3F

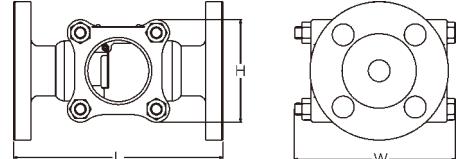


Model	Connect.	Size	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight			
			MPa	psi	°C	°F	L	H	H1	H2	W	L	H	H1	H2	W	kg	lb	
TS1	Screwed Rc, NPT	1/2"	0,8 1,0	Steam Water	116 145	Steam Water	180 100	Steam Water	356 212	Steam Water	80 71 85	69 71 76	14 17 21	2.7 2.8 3.0	0.5 0.7 0.8	2.4	Brass C3771	0,9	1.8
		3/4"															1,0	2.0	
		1"															1,2	2.2	
T3	Screwed Rc, NPT	1/2"	1,0	145	183	361	123 170 195	70 85 115	110 155 185	4.8 6.7 7.7	2.8 3.3 4.5	4.3 6.1 7.3	Cast Steel A216WCB	1,6	3.5				
		3/4", 1"												1,7	3.7				
		1 1/4"												3,3	7.3				
		1 1/2"												3,2	7.0				
		2"												7,3	16.1				
T3F	Flanged JIS, ASME, DIN	1/2"	1,0	145	183	361	144 180	70 85	110 155 185	5.7 7.1 8.3	2.8 3.3 4.5	4.3 6.1 7.3	Cast Steel A216WCB	3,3	7.3				
		3/4"												4,4	9.7				
		1"												5,0	11.0				
		1 1/4"												8,0	17.6				
		1 1/2"												9,0	19.8				
		2"												7,3	26.4				



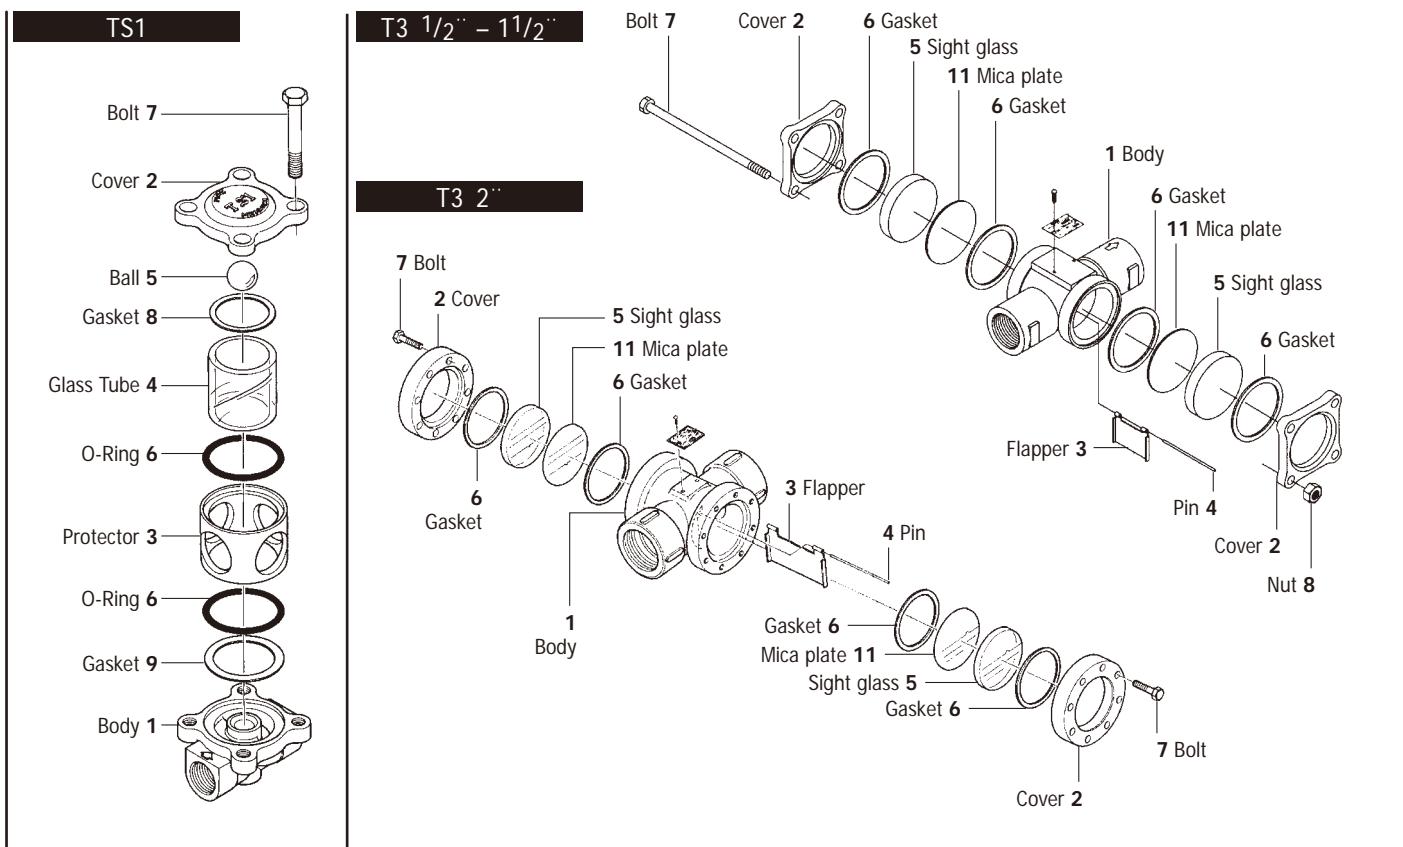
Spare Parts

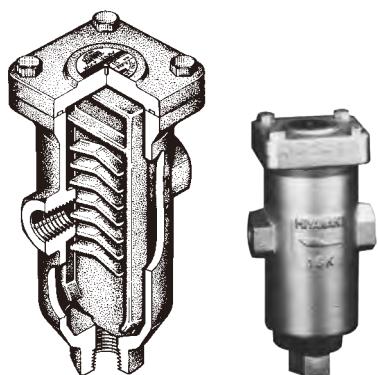H3**Features**

1. Separates mist and condensate from steam and air lines
2. Compact size – easy installation together with Pressure Reducing Valves and Steam Traps
3. Very low pressure loss (0.002 MPa)

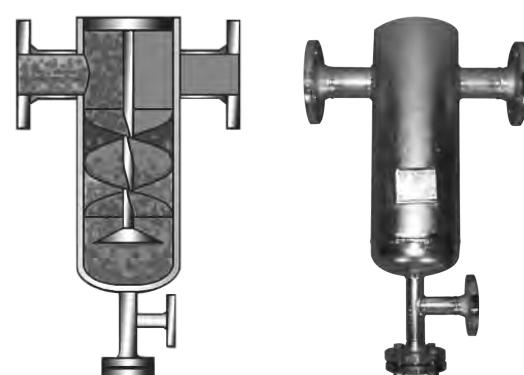H5**H9XF****Suitable for**

All steam and air lines

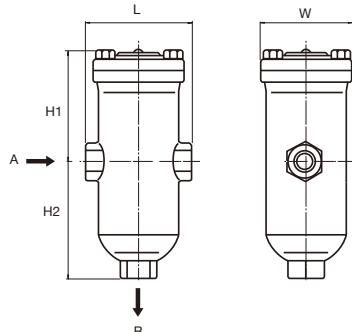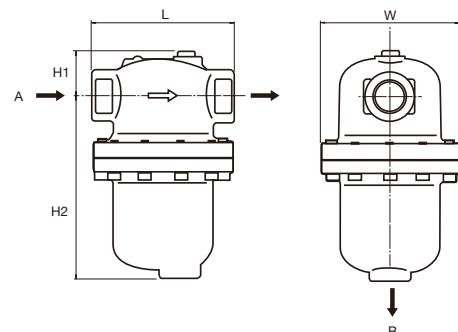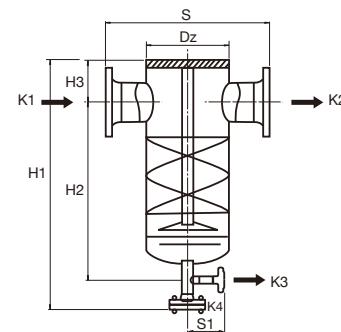Dimensions**H3****H5****H9XF**

Model	Connections	Size (in)		Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight					
		A	B	MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb				
H3	Screwed Rc, NPT	1/2"	1/2"	1,6	230	220	428	100	93	120	86	3.9	3.7	4.7	3.4	Ductile Cast Iron FCD450	3,6	7.9				
		3/4"	1/2"					130	120	158	108	5.1	4.7	6.2	4.3		6,7	14.7				
		1"	1/2"					160	130	180	128	6.3	5.1	7.1	5.0		10,1	22.2				
H5	Screwed Rc, NPT	1/2"	3/4"	2,0	290	220	428	150	50	193	146	5.9	2.0	7.6	5.7	Ductile Cast Iron FCD450	7,1	15.6				
		3/4"						190	69	213	175	7.5	2.7	8.4	6.9		7,3	16.1				
		1"						219	82	260	199	8.6	3.2	10.2	7.8		12,5	27.5				
		1 1/4"	1"														20,5	45.1				
		1 1/2"																				
		2"																				

Model	Connection	Size (DN)	PN	Inlet	Outlet	Condensate Outlet	Dirt Pocket	Dimensions (mm)					Dimensions (in)					Body Material	Weight		
				K1 (DN)	K2 (DN)	K3 (DN)	K4 (DN)	Dz	H1	H2	H3	S	S1	Dz	H1	H2	H3	S	S1	kg	lb
H9XF	Flanged DIN, ASME	15	16	15	15	15	15	88,9	360	240	50	240	90	3.5	14.2	9.4	2.0	9.4	Steel P265 GH	6,8	14.96
		20		20	20			114,3	460	320	70	310	4.5	18.1	12.6	2.8	12.2	7,3	16.06		
		25		25	25			7,8	17.16												
		32		32	32			12	26.4												
		40		40	40			12,5	27.5												
		50		50	50			26	57.2												
		65		65	65			27	59.4												
		80		80	80			29	63.8												
		100		100	20	32	273,0	900	630	160	560	120	10.7	35.4	24.8	6.3	22.0	4.7	61	134.2	
		125		125															65	143.0	
		150		150															95	209.0	
		200		200															on request		

Other pressure ratings (PN25, PN40), connections and body materials on request.

Steam Trap Survey Assistant

Dr. Trap® Jr.

PM15


It is the ideal partner for steam trap inspections.

PM15 is capable to work with most of the steam traps of the main manufacturers.



Ultrasonic Checker PM11

Temperature Probe

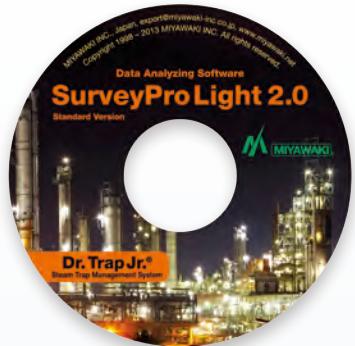

SurveyPro Light PM150 V2.0

Features PM15

The Steam Trap Ultrasonic Checker PM11 has been designed to assess the operating condition of steam traps during operation by measuring the vibration and the temperature of the surface.

- The system consists of the Ultrasonic Checker PM11, a Temperature Probe and the SurveyPro Light PM 150 Software version 2.0.
- Measures vibration and temperature at the same time
- The temperature probe can measure temperatures between 0°C and 250°C
- Estimates and displays the saturation pressure by measuring the temperature.
- Useful for testing not only steam traps, but also valves
- One key operation for all functions
- Long battery life – 40 hours or more of continuous use
- Shuts off automatically if the device is not in use for 5 minutes
- Includes a stop watch for monitoring periodic characteristics of vibrations
- Compact, lightweight and easy to carry

Software SurveyPro Light PM150 V2.0

Software for analyzing the data which had been measured by using the steam trap checker PM11 and for determining the condition of the steam trap.

- Standard and Special versions available
- Both versions allow the estimation of CO₂ emissions which correspond to leaking steam traps.
- Compatible with Windows 7, Windows 8/8.1 and Windows 10 – 32 and 64 bit versions.
- Full data compatibility. Data generated by the previous version can be integrated into the new software*
- The version 2.0 comes with an updated list of steam trap models of the main steam trap manufacturers.
- The updated software allows a better classification of steam traps to various groups and areas inside a plant with the possibility for more detailed analysis of selected groups or areas.

* For more details please contact MIYAWAKI Inc. or an authorized representative

Working Flow

1 Tagging of Steam Traps Put a tag on or text to each trap in your factory, so that it can be easily identified any time.	2 Survey List set-up Run the Survey Pro Light software and fill in the basic information of the steam traps. Information such as survey list name, tag number, area, manufacturer, inlet pressure or size are filled in at this moment.	3 Traps inspection Diagnose each trap on site using the checker PM11. Write down the vibration data measured for each trap.
4 Filling out of Survey List Run again the Survey Pro Light software and enter the measured vibration data into the survey list for each trap. Once the vibration value of a trap has been entered, the operating condition of the trap will be displayed immediately. The list will also display the steam loss of each trap (if detected) and the related financial losses.	5 Analysis After entering all test results of the survey, the software can show an analysis for each trap type and manufacturer, an analysis of steam losses and related financial losses for each manufacturer and trap type, an analysis of CO ₂ emission, or an analysis for kind of application (process, tracing, etc.), with the possibility of showing the results by areas or groups.	6 Trend Analysis Comparisons can be made by Manufacturer, by the installed types, by the pressure classification and by applications. In each case: <ul style="list-style-type: none">- the failure rate- the steam loss- and money loss tendencies will be shown.

Technical Specification

Probes	Vibration	Piezo-electric-ceramic acceleration sensor (10 kHz – 40 kHz)	Displays	Illuminated liquid crystal display (LCD)
	Temperature	Thermistor Range: 0 – 250°C / 32 – 482°F	Housing	Heat-resistant plastic (ABS), simple waterproof design
Weight	230 g (incl. batteries)			
Power supply	2 x 1.5V AA alkaline batteries (80 hours or more (45 hours or more with the LCD light on continuously.)) 2 x 1.2V AA NiMH (75 hours or more (40 hours or more with the LCD light on continuously.))		Ambient working temperature	0 – 40°C (32 – 104°F)

Steam Trap Survey Assistant

Dr. Trap® Jr.

SurveyPro Light PM150 V2.0


Main Functions – Standard Version

Survey List


Trap Details	
Event Name	RT003
Survey/Service Date	30.07.2013
Trap Information	
Basic Information	Additional Information
Survey List Name	Test
Area	
Trap No.	
Name	
Inlet Date	30.07.2013
Type	
Min.	
Inlet Press. [bar]	
Size [mm]	
Set Temp. [°C]	

Survey List - Survey List Name[1st Section], Group[All] Area[All] Event Name[2011 Routine Survey]							
Edit		Output	Filter	Post Process	Save as Excel File	Print Preview	Advanced Filter
Survey List Name		Group	Area	Trap No.	Event Name	Survey/Service Date	Appl.
Edit	1st Section	01MYWA	10	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	30	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	40	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	50	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	60	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	70	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	80	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	90	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	100	2011 Routine Survey	4/1/2011	Trace	T-cnt
Edit	1st Section	01MYWA	110	2011 Routine Survey	4/1/2011	Trace	T-cnt

Analysis

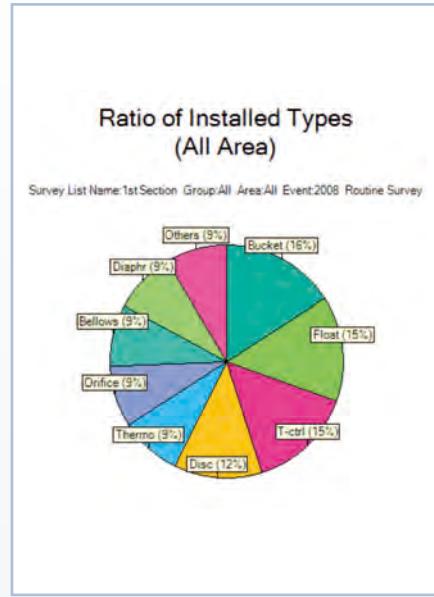

Trend Analysis

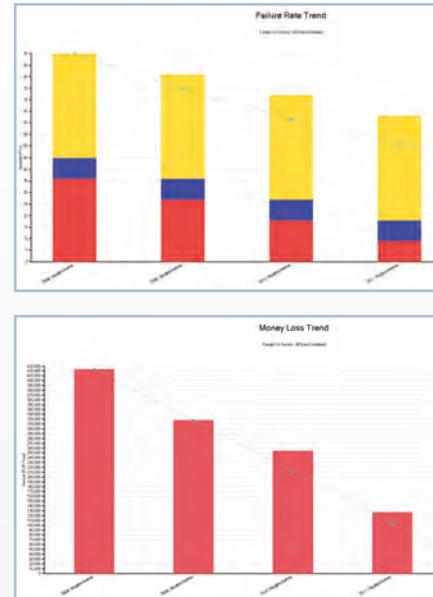

Additional Functions – Special Version

The Special Version includes the functions of the Standard Version plus the following ones:


Integration of multiple survey files into a single one

File Manager		
<input type="button" value="Import"/>	<input type="button" value="Export"/>	
File Name	Create Date	Update Date
Test	10.07.2013	10.07.2013
1st Section	24.02.2013	25.04.2013
Sample	24.02.2013	25.04.2013
<input type="button" value="New"/>		
<input type="button" value="Delete"/>		
<input type="button" value="Tree Structure"/>		
<input type="button" value="Integrate"/>		

Repair Cost Management

Trap Details	
Event Name	2011
Survey/Service Date	01.10.2011
Trap Information	
Maintenance Log	
Replacement Name	T67
Replacement Type	T-cnt
Replacement Mfr.	MIYAWAKI
Replacement Size [mm]	25
Connect. of Replacement	RF
Flange Std. of Replacement	
Set Temp. of Replacement [°C]	100
Imtry Date of Replacement	01.10.2011
Purchase Cost [EUR]	490
Labor Cost [EUR]	50
Total Repair Cost [EUR]	540

Repair Efficiency

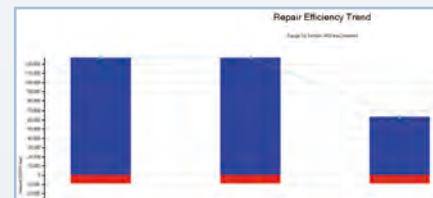

Management of other kind of failures

- Failure of inlet valve
- Failure of outlet valve
- Failure of other than valves


User and Ranking Summaries

Select Criteria of Ranking Summary	
Survey List Name:	1st Section
Tabulated Data:	All Data
Summary Item:	Total Qty
Summary Classifn:	Type
Event:	<input checked="" type="radio"/> Designated Event: 2012 Routine Survey
	<input type="radio"/> Designated Date: 30.07.2013
Ranking:	Top Ranking 5
<input type="button" value="View"/>	
<input type="button" value="Close"/>	

Service Period

Cndrs.	Drain
Flange Std.	
F to F [mm]	
Op. Hrs [Hour]	24
Op. Days [Day]	365
Steam Cost [EUR/1000kg]	ID: 1 120.0EUR/1000kg (1)
Calculated Information	
CO2 Emissions [kg CO2]	
Period of Service [Year]	3.0
Good Operating Period [Year]	3.0
Survey Cost [EUR]	5
Ave. Consumption Cost [EUR/yr.]	7

Average Consumption Cost

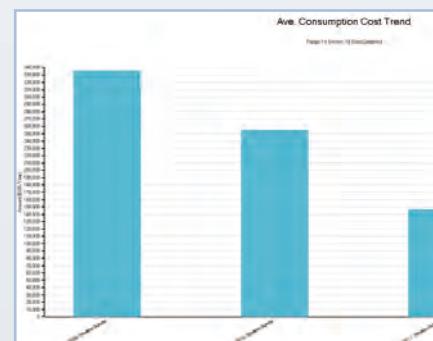

Steam Trap Management System

Dr. Trap®

PM500

Steam Trap Management System PM500

Checker (PM520)

It detects the vibration and temperature in steam traps at the same time.

The survey accuracy has been improved from the previous model (PM321) by MIYAWAKI's sensor technology.



Checker (PM520)

* Tablet to be prepared by customer
* For Windows® only

Trap Survey App (PM510)



Software SurveyPro 4.0 (PM530)

* Standard and Special versions available

Trap Survey App (PM510)

The App will be installed on a tablet computer, which must be prepared by the customer.

It displays and stores survey results transferred from the checker using Bluetooth connection.

Software SurveyPro 4.0 (PM530)

The software will be installed on a personal computer. It aggregates and analyzes steam trap data from the Trap Survey App, identifying faulty steam traps, providing steam loss and financial loss data and includes many other possibilities to manage the steam traps easily.

It provides detailed charts and graphs.

Features of PM500

• High-speed survey

The special design of the vibration sensor integrating a contact-type thermocouple sensor guarantees a high survey speed. Each steam trap will be surveyed within 2 seconds at the shortest, and 10 seconds at the maximum.

• Improved survey accuracy

The holding mechanism of the probe tip ensures a pressing force, which reduces the discrepancy of survey results substantially.

• Simple operation

The checker is ergonomic shaped to handle and operate with one hand. The survey will start automatically by simply pressing down the probe on the trap with minimum force. It is possible to proceed with the survey uninterruptedly without using the tablet.

• Improved durability

Dust and water protection : IP34 (Conforming to IEC 60529)
Drop test (Conforming to IEC 60068-2-31)

• Estimation of CO₂ emissions

The software can estimate CO₂ emissions based on steam trap leakage amounts.

• Full data compatibility

After converting survey data generated by the previous version (V3.1), the data can be integrated into the new software without any problems.

Technical Specifications

Hardware	Weight		Sensor		Ambient working temperature		Max. surface temperature		Power supply *not included in package	Continuous operating (approximately)		Working survey time	Bluetooth	
	g	lb	Vibration	Temperature	°C	°F	°C	°F		Hours	Seconds		Interface	Communication distance
Checker PM520	220	0.49	Piezo-electro-ceramic sensor	Type K thermocouple	-5 to +50	23 to 122	400	752	2 x 1.2V AA size NiMH	8 (discharged capacity: 1900mAh)	10 (2 minimum)	Ver. 2.1 + EDR SPP	Approx. 5 m	

Accessory: 1 x Soft case

Display: Transmission type TFT color liquid crystal

Software	Medium	Environment						Others
		Operating System	CPU	Memory (RAM)	Hard disk	Display resolution (pixel)	Others	
Trap Survey App PM510*	CD-ROM	Windows 7, Windows 8/8.1, Windows 10 (32 or 64 bit)	1.6GHz or more	4GB or more	20GB or more free space (excl. Data area)	1280 x 800 or more	Bluetooth: Ver.2.1 + EDR SPP Microsoft .NET Framework 4.5 Microsoft SQL Server Compact 3.5 SP2	
			1GHz or more	1GB (64bit: 2GB) or more		1024 x 768 or more		

* PM510 is to be installed on a tablet. The above specifications of PM510 are hardware requirement for the tablet.

Steam Trap Management System

Dr. Trap®

Trap Survey App PM510

The App displays and stores the survey results from the checker.

It includes a lot of new and additional functions such as viewing and editing a survey map or a camera function.

It can contribute to create a paperless environment.


The available functions depend on the version of SurveyPro 4.0, standard or special.

Main Functions

Survey screen


The touch-screen tablet makes it easy to browse and edit a survey list.

A lot of detailed information is available on the survey screen and can be edited there. The survey log information will be also displayed on the screen.

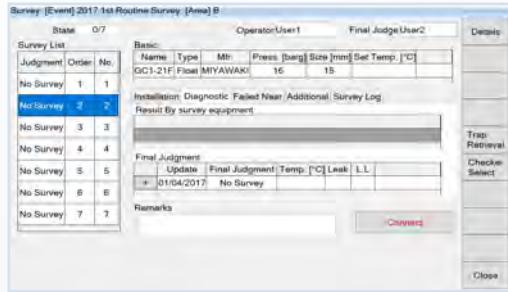

Survey map

A survey map can be displayed and edited on the tablet computer. The map can be associated with each steam trap on the survey list. Then, the order of the steam trap survey can be set.

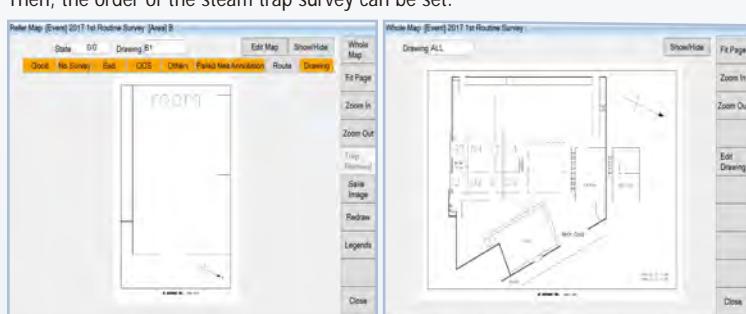

Camera function

The camera function allows to take images and record videos on the Camera screen. It is possible to edit and save the images for each steam trap. The images and videos will be displayed on the detailed screen of each steam trap.

PM510 Function correspondence table

Several functions of PM510 are unavailable depending on the version of PM530.

[○] : Available, [-] : Unavailable

PM530		
PM510 Function	Standard	Special
List Import/Export	○	○
List Retrieval	○	○
Edit Area	○	○
Survey	○	○
Survey map	-	○
Whole map	-	○
Edit Drawing	-	○
Camera	-	○

SurveyPro 4.0 PM530

The software was updated from SurveyPro V3.1. It offers to analyse survey data, view trends, and manage survey files.

Same as V3.1, it displays various summary sheets and graphs depending on the purpose, and export them to Excel and image files. It helps to create survey reports. Standard and Special versions are available.

Upgraded Functions

Single Sheet


Each survey list can be displayed as a Single Sheet. Then, it can be exported to Excel as well. It is possible to browse and edit survey list detail information on the sheet at once.



Data Summary Sheet

Different from the previous version, SurveyPro V3.1, the data summary sheets will be displayed as one sheet. Consequently, it is easier to use various analysis functions to create summary sheets such as by Manufacturer and by Type.

The summaries of all data can be displayed in graphical form same as V3.1.

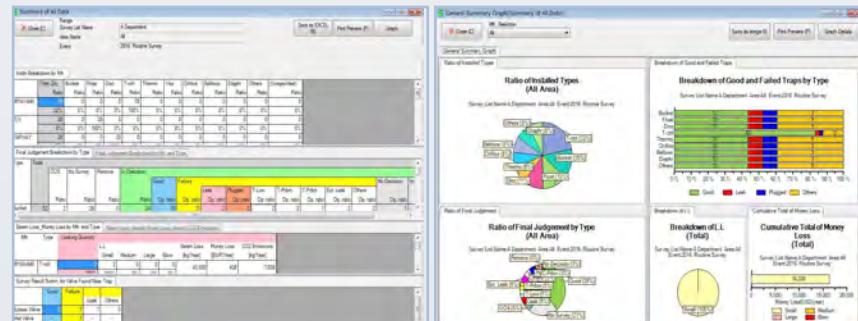

SCCV®-System

The MIYAWAKI SCCV®-System: worldwide patented

MIYAWAKI's internationally patented Self Closing and Centering Valve SCCV®-System has proven its high reliability and effectiveness during more than two decades. Many thousands of steam traps equipped with the SCCV®-System have proven enormous advantages for our customers:

1. A substantially longer service life compared with other steam traps
2. No partial or one-sided precipitate wear of valve and seat
3. Greatly reduced wear of all internal parts due to the reduction of the closing forces required to maintain a seal
4. No steam loss for all Temperature Control Traps




The MIYAWAKI SCCV®-System: variable adjusted to various types

Intensive research and development activities over many years have enabled MIYAWAKI to incorporate the SCCV®-System in various types of steam traps. Thus it became possible to adopt the SCCV®-System to a wide pressure range and to utilize the SCCV®-System not only for Bimetal Steam Traps, but also for Inverted Bucket and Float Type Steam Traps.

Inverted Bucket Steam Traps

Series ES


The Valve Holder is fixed to a specially developed "Super-Lever". The Valve is "free floating" inside the Valve Holder. Thus the control space inside the Valve Holder decreases the force toward the seat caused by the movement of the bucket. The Valve will close softly and exactly in the center of the seat.

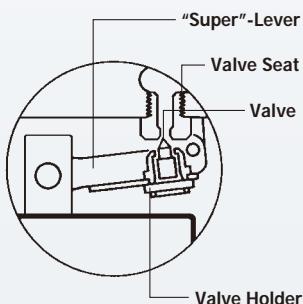

Inverted Bucket Steam Traps

Series ER


The SCCV®-System is part of a "Double Valve Unit", which is operating on the basis of the pressure difference inside the unit. The trap is thus characterized by extended lifetime of the valve assembly and a greater condensate discharge per body size when compared to conventional inverted bucket steam traps.

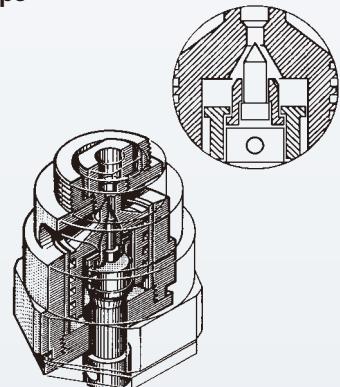

Ball Float Steam Trap

G11N, G12N


The Valve (Ball) lies inside a Valve Holder, which is directly connected through a lever with the float. By installing a spring inside the Valve Holder the movements of the float and the forces caused by it will not be directly transferred to the Valve. This will increase the service life of the sealing surfaces.

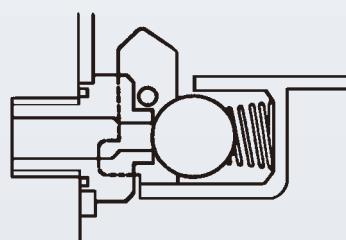

Temperature Control Steam Trap

TB7N

The Bimetal Unit including the valve are guided inside the body. A spring reduces the force caused by the deflection of the bimetals which move the valve toward the seat. The guiding of the valve within the seat and the lift of the valve is designed in such a way that the valve will close very smoothly in the center of the seat.

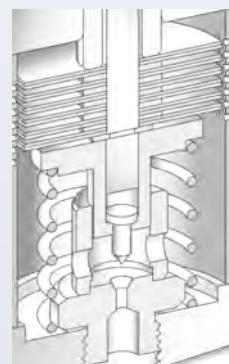

SCCV®-System

Basic Principle

Regulating

The design of the Valve and Seat and the Valve lift (distance between the closed and open position of the valve) are calculated and designed in such a way that the valve closes its seat at the time that the condensate reaches the steam trap adjusted temperature.


Centering and Soft Closing

The valve is "free floating" inside the valve holder. The valve moves to the center caused by the pressure and the flow of condensate. The tip of the valve is drawn down to the center axis of the valve seat. A spring and a stop ring inside the control chamber absorb and soften the movement of the valve (caused by the temperature and pressure of the steam system) towards its seat. The centering and soft closing characteristics prevents premature or uneven wearing of the valve and its seat, extending the lifetime of the steam trap.


No Steam Loss

The valve closes exactly in the center of the seat at the adjusted temperature, slightly below the saturation temperature assuring Zero steam loss.


TB51

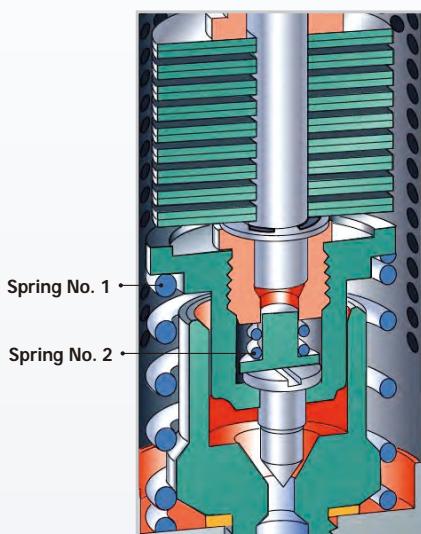


TB7N

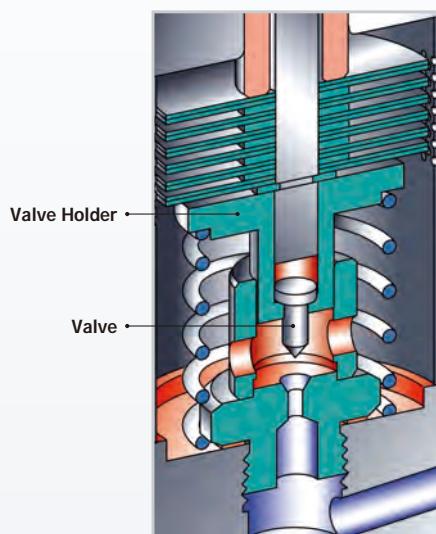

TB9N

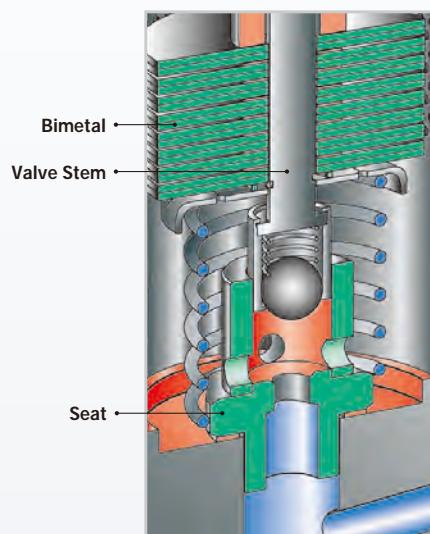


1

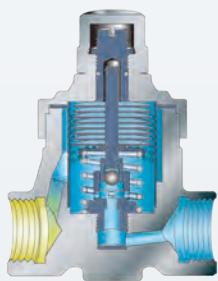


On start-up, the bimetallic discs are all flat and the valve shaft is up with the valve fully open. Virtually all cold condensate and air are discharged.

2

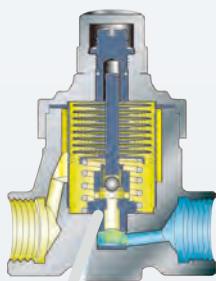


As the temperature of the condensate increases, the bimetallic discs begin to curve gradually and force the valve shaft and the valve holder to move down.

3

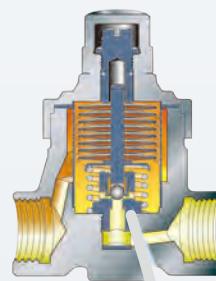



When condensate with higher temperature (near to set temperature) flows in, the bimetallic discs are curved even more and, at the same time, the valve shaft moves down and the valve holder closes the holes in the guide partially.

4

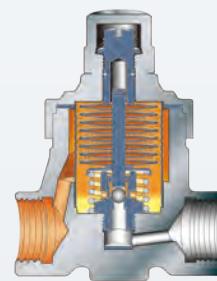

In case of very low condensate flow, the holes in the guide are closed completely by the valve holder and the valve will close precisely in the center of the seat. Normally, the trap is filled with hot condensate and the operation will rest in the state shown in figure 3. Condensate will be discharged continuously.

Most of the condensate is still discharged quickly, since the valve and the holes in the fixed guide on the valve seat are still fully open.

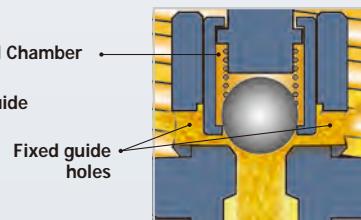

The amount of condensate being discharged is reduced quickly. This prolongs the time that the hot condensate stays near the bimetallic discs and the heat of the condensate is transferred to the bimetals much more effectively.

Material Standards and Temperature

Material Standards

Following you find a list of materials mainly used by MIYAWAKI for its Steam Traps, according to Japanese Standards and the most closely corresponding numbers of American (ASTM), European (EN) and German (DIN) Standards.

1. Iron Castings

JIS	ASTM	EN	DIN
FC200	A48 – class 30	EN-GJL-200	GG-20 (0.6020)
FC250	A48 – class 35	EN-GJL-250 (EN-JL 1040)	GG-25 (0.6025)
FCD450	A536 65-45-12	EN-GJS-450-10 (EN-JS1040)	GGG40.3 (0.7043)

2. Steel Casting and forgings

JIS	ASTM	EN	DIN
SCPH 2	A216WCB	GP240GH (1.0619)	GS-C25
SCPH 21	A217WC6	G17CrMo5-5 (1.7357)	GS17CrMo55 (1.7357)
SCPH32	A217WC9	GS12CrMo9-10 (1.7380)	10CrMo9-10 (1.7380)
SFVC2A	A105	P250GH (1.0460)	C22.8 (1.0460)
SFVAF22B	A182F22	10CrMo9-10 (1.7380)	10CrMo9-10 (1.7380)

3. Stainless and Heat Resisting Steels


JIS	ASTM	EN	DIN
SCS13A	A351CF8	GX5CrNi19-10 (1.4308)	G-X6CrNi189 (1.4308)
SCS14	A351CF8M	GX5CrNiMo19-11-2 (1.4408)	G-X6CrNiMo1810 (1.4408)
SUS303	A582S30300	X8CrNiS18-9 (1.4305)	X10CrNiS189 (1.4305)
SUS304	A276S30400	X5CrNi18-10 (1.4301)	X5CrNi1810 (1.4301)
SUS403	A276S40300	X6Cr13 (1.4000)	X6Cr13 (1.4000)
SUS420J2	-	X30Cr13 (1.4028)	X30Cr13 (1.4028)

4. Alloys

JIS	ASTM	EN	DIN
C3771	C37700 (B 124-89)	CuZn39Pb2 (CW612N)	CuZn39Pb2

Diameters and Drilling of Flanges

(see Page 91)

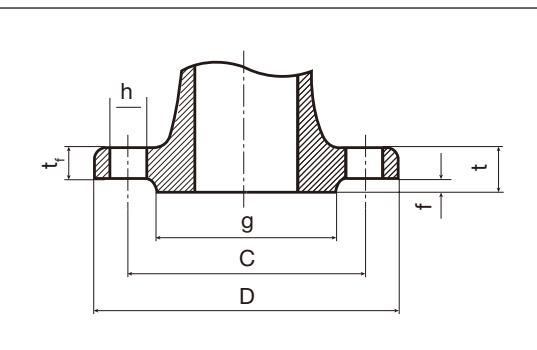

Conversion Factors


$$T^{\circ}\text{C} = \frac{5}{9}(T^{\circ}\text{F} - 32) \quad T^{\circ}\text{F} = 1,8 T^{\circ}\text{C} + 32$$

°C	°F / °C	°F	°C	°F / °C	°F
	°C			°F	
10,0	50	122	127	260	500
12,8	55	131	132	270	518
15,6	60	140	138	280	536
18,3	65	149	143	290	554
21,1	70	158	149	300	572
23,9	75	167	154	310	590
26,7	80	176	160	320	608
29,2	85	185	166	330	626
32,2	90	194	171	340	644
35,0	95	203	177	350	662
37,8	100	212	182	360	680
40,6	105	221	188	370	698
43	110	230	193	380	716
46	115	239	199	390	734
49	120	248	204	400	752
52	125	257	210	410	770
54	130	266	216	420	788
57	135	275	221	430	806
60	140	284	227	440	824
63	145	293	232	450	842
66	150	302	238	460	860
68	155	311	243	470	878
71	160	320	249	480	896
74	165	329	254	490	914
77	170	338	260	500	932
79	175	347	266	510	950
82	180	356	271	520	968
85	185	365	277	530	986
88	190	374	282	540	1004
91	195	383	288	550	1022
93	200	392	293	560	1040
99	210	410	299	570	1058
104	220	428	304	580	1076
110	230	446	310	590	1094
116	240	464	316	600	1112
121	250	482			

Properties of Saturated Steam

Absolute Pressure p MPa	Saturation Temperature ts °C	Steam Volume v'' m³/kg	Steam Density ρ'' kg/m³	Sensible Heat h' kJ/kg	Total Steam Heat h'' kJ/kg	Latent Heat r = h'' - h' kJ/kg
0,1	99,63	1,6940	0,5904	417,51	2.675,4	2.257,9
0,15	111,37	1,1590	0,8628	467,13	2.693,4	2.226,3
0,2	120,23	0,8854	1,1290	504,70	2.706,3	2.201,6
0,25	127,43	0,7184	1,3920	535,34	2.716,4	2.181,1
0,3	133,54	0,6056	1,6510	561,43	2.724,7	2.163,3
0,35	138,87	0,5240	1,9080	584,27	2.731,6	2.147,3
0,4	143,62	0,4622	2,1630	604,67	2.737,6	2.132,9
0,45	147,92	0,4138	2,4170	623,16	2.742,9	2.119,7
0,5	151,84	0,3747	2,6690	640,12	2.747,5	2.107,4
0,55	155,46	0,3426	2,9200	655,78	2.751,7	2.095,9
0,6	158,84	0,3155	3,1700	670,42	2.755,5	2.085,1
0,65	161,99	0,2925	3,4190	684,12	2.758,8	2.074,7
0,7	164,96	0,2727	3,6670	697,06	2.762,0	2.064,9
0,75	167,75	0,2554	3,9150	709,29	2.764,8	2.055,5
0,8	170,41	0,2403	4,1620	720,94	2.767,5	2.046,6
0,85	172,94	0,2268	4,4090	732,02	2.769,9	2.037,9
0,9	175,36	0,2148	4,6550	742,64	2.772,1	2.029,5
0,95	177,66	0,2040	4,9010	752,81	2.774,2	2.021,4
1,0	179,88	0,1930	5,1470	762,61	2.776,2	2.013,6
1,1	184,07	0,1747	5,6370	781,13	2.779,7	1.998,6
1,2	187,96	0,1632	6,1270	798,43	2.782,7	1.984,3
1,3	191,61	0,1511	6,6170	814,70	2.785,4	1.970,7
1,4	195,04	0,1407	7,1060	830,08	2.787,8	1.957,7
1,5	198,29	0,1317	7,5960	844,67	2.789,9	1.945,2
1,6	201,37	0,1237	8,0850	858,56	2.791,7	1.933,1
1,7	204,31	0,1166	8,5750	871,84	2.793,4	1.921,6
1,8	207,11	0,1103	9,0650	884,58	2.794,8	1.910,2
1,9	209,80	0,1047	9,5550	896,81	2.796,1	1.899,3
2,0	212,37	0,0996	10,0500	908,59	2.797,2	1.888,6
2,2	217,24	0,0907	11,0300	930,95	2.799,1	1.868,2
2,4	221,78	0,0832	12,0200	951,93	2.800,4	1.848,5
2,6	226,04	0,0769	13,0100	971,72	2.801,4	1.829,7
2,8	230,05	0,0714	14,0100	990,48	2.802,0	1.811,5
3,0	233,84	0,0666	15,0100	1.008,40	2.802,3	1.793,9
3,2	237,45	0,0624	16,0200	1.025,40	2.802,3	1.776,9
3,4	240,88	0,0587	17,0300	1.041,80	2.802,1	1.760,3
3,6	244,16	0,0554	18,0500	1.057,60	2.801,7	1.744,1
3,8	247,31	0,0524	19,0700	1.072,70	2.801,1	1.728,4
4,0	250,33	0,0498	20,1000	1.087,40	2.800,3	1.712,9
5,0	263,91	0,0394	25,3600	1.154,50	2.794,2	1.639,7
6,0	275,55	0,0324	30,8300	1.213,70	2.785,0	1.571,3
7,0	285,79	0,0274	36,5300	1.267,40	2.773,5	1.506,1
8,0	294,97	0,0235	42,5100	1.317,10	2.759,9	1.442,8
9,0	303,31	0,0205	46,7900	1.363,70	2.744,6	1.380,9
10,0	310,96	0,0180	55,4300	1.408,00	2.727,7	1.319,7
11,0	318,05	0,0160	62,4800	1.450,60	2.709,3	1.258,7
12,0	324,65	0,0143	70,0100	1.491,80	2.689,2	1.197,4
13,0	330,83	0,0128	78,1400	1.532,00	2.667,0	1.135,0
14,0	336,64	0,0115	86,9900	1.571,60	2.642,4	1.070,8
15,0	342,13	0,0103	86,7100	1.611,00	2.615,0	1.004,0
16,0	347,33	0,0093	107,4000	1.650,50	2.584,9	934,4
17,0	352,26	0,0084	119,5000	1.691,70	2.551,6	859,9
18,0	356,96	0,0075	133,4000	1.734,80	2.513,9	779,1
19,0	361,43	0,0067	149,8000	1.778,70	2.470,6	691,9
20,0	365,70	0,0059	170,2000	1.826,50	2.418,4	591,9
22,0	373,69	0,0037	268,3000	2.011,10	2.195,6	184,5
22,12	374,15	0,0032	315,5000	2.107,40	2.107,4	0,0

MEMO

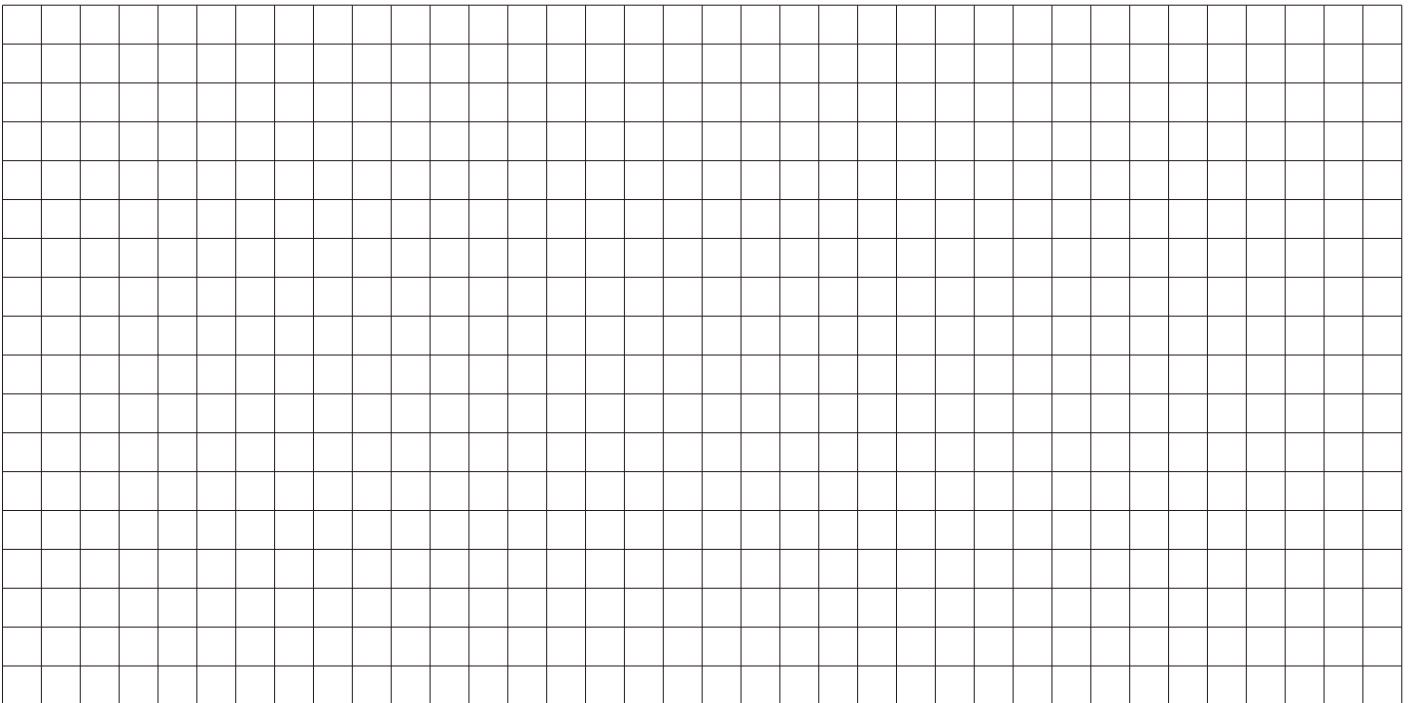



Environmentally friendly through reduced
energy usage and improved steam efficiency



MIYAWAKI Inc.
2-1-30, Tagawakita, Yodogawa-ku
Osaka 532-0021
JAPAN
Tel.: + 81 - 6 - 6302 - 5549
Fax: + 81 - 6 - 6305 - 7155
E-Mail: export@miyawaki-inc.co.jp
Website: www.miyawaki.net



MIYAWAKI GmbH
Birnbaumsmühle 65
15234 Frankfurt (Oder)
GERMANY
Tel.: + 49 - 335 - 4007 0097
E-Mail: info@miyawaki.de
Website: www.miyawaki.net

