




AE8

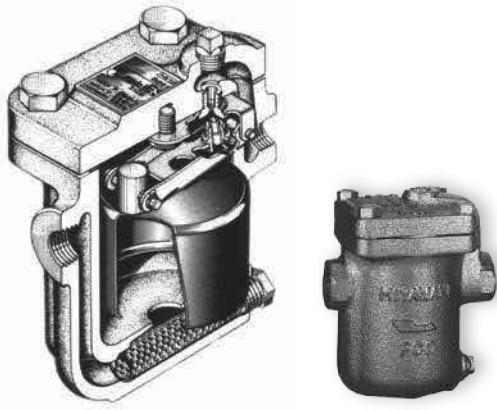


AV

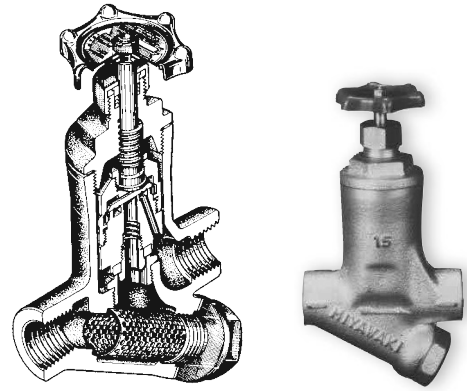

Capacity Chart AE8

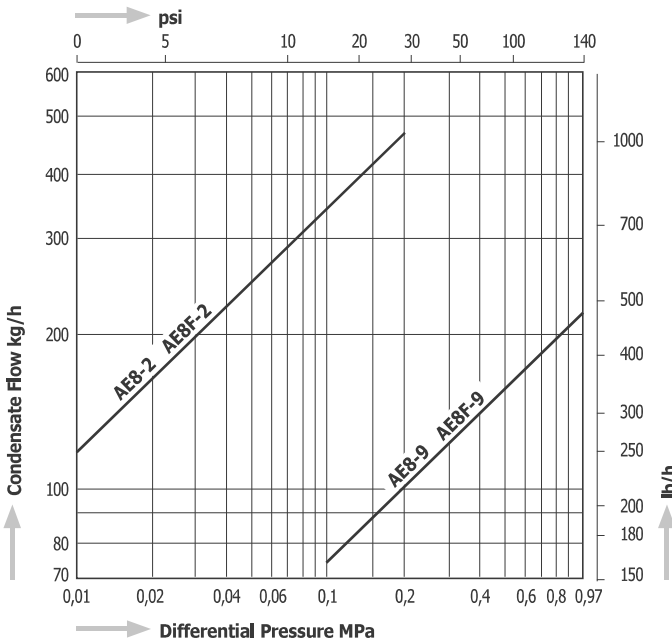


Capacity Chart AV

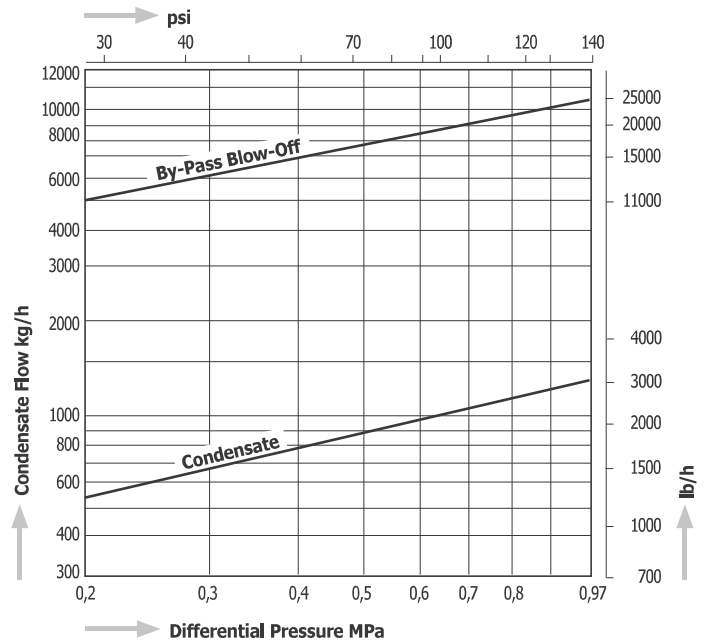


Dimensions


AE8



AE8F

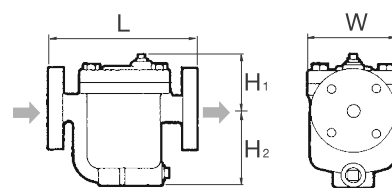

AV



Model	Connections	Size	Operating Pressure Range		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight	
			MPa	psig	°C	°F	L	H ₁	H ₂	W	L	H ₁	H ₂	W		kg	lb
AE8-2	Screwed Rc, NPT	1/2"	0,01 – 0,2	1.5 – 29	350	662	130	73	90	100	5.1	2.9	3.5	3.9	Ductile Cast Iron FCD450	3,7	8.1
		3/4"					135	73	90	100	5.3					3,9	8.6
		1"					130	73	90	100	5.1					3,7	8.1
		1/2"					135	73	90	100	5.3					3,9	8.6
AE8F-2	Flanged JIS, ASME, DIN	1/2"	0,01 – 0,2	1.5 – 29	350	662	175	73	90	100	6.9	2.9	3.5	3.9		5,3	11.7
		3/4"					195	68	95	100	7.7	2.7	3.7	3.9		5,7	12.5
		1"					215	73	90	100	8.5	2.9	3.5	3.9		6,8	15.0
		1/2"					195	73	90	100	6.9	2.9	3.5	3.9		5,3	11.7
AE8F-9	Flanged JIS, ASME, DIN	3/4"	0,1 – 0,97	15 – 140	350	662	195	68	95	100	7.7	2.7	3.7	3.9	5,7	12.5	
		1"					215	73	90	100	8.5				6,8	15.0	
		1/2"					195	73	90	100	6.9				2.9	3.5	3.9
AV-4	Screwed Rc, NPT	1/2"	0,2 – 0,97	29 – 140	150	302	110	155	60	65	4.3	6.1	2.4	Cast Iron FC250	2,4	5.3	
AV-6		3/4"					65		2.6		2.6		2,5		5.5		
AV-8		1"					70		2.8		2.6		2,7		5.9		